



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



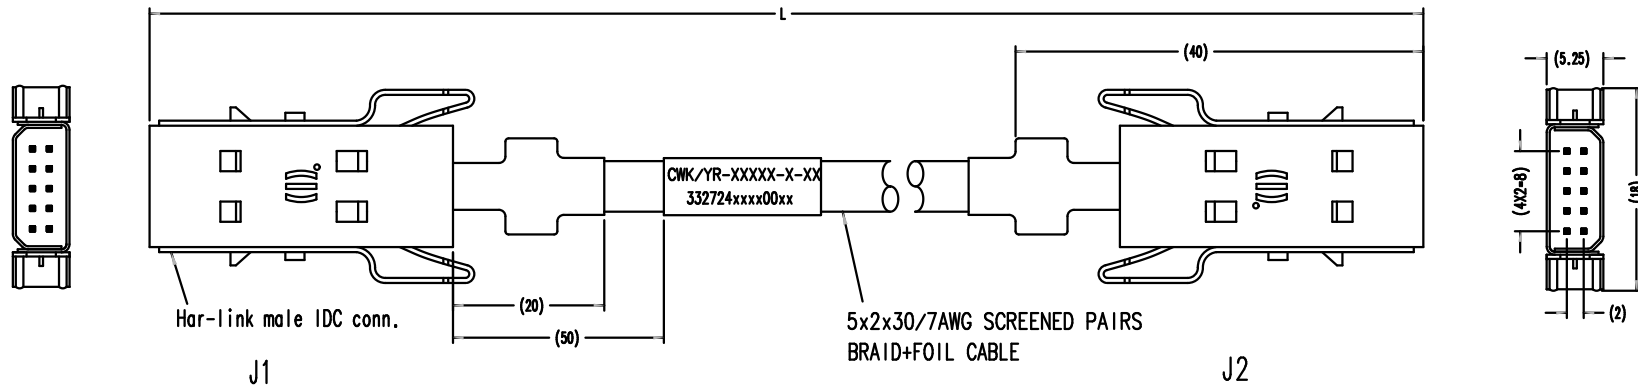

IEEE1355 CABLING



	J1	Wire color	J2
✕	2-e	Brown	1-a
✕	1-e	Blue	2-a
✕	2-d	Red	1-b
✕	1-d	Green	2-b
✕	2-c	Black	2-c
✕	1-c	White	1-c
✕	2-b	Orange	1-d
✕	1-b	Yellow	2-d
✕	2-a	Violet	1-e
✕	1-a	Grey	2-e
	Shell	Braid	Shell

NOTES /

- 1.) MECHANICAL REQUIREMENTS
  - OPERATING TEMPERATURE = -20° TO +80°C
  - MATING CYCLES : 250, PERFORMANCE LEVEL 2 ( IEC 60512-5 )
- 2.) THE CONNECTOR COMPLIES REQUIREMENT : IEC 61076-4-107
- 3.) WHITE LABEL INFORMATION:
 

DATE CODE & LOT INFORMATION  
 HARTING P/N
- 4.) CABLE MUST BE PERFORMED HI-POT TEST AND CONTINUITY TEST

33 27 243 500 0018	5 m																	
33 27 243 200 0017	2 m																	
33 27 243 100 0016	1 m																	
33 27 243 050 0015	0.5 m																	
<i>Part-No.</i>	<i>Dim. L</i>																	
All Dimensions in mm Original Size MM A 3	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3">Techn. Character.</th> <th rowspan="4" style="text-align: center;">Scale /</th> </tr> <tr> <th>Detail.</th> <th>Dat.</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td></td> <td>06.05.08</td> <td>J.S.</td> </tr> <tr> <td>Insp.</td> <td></td> <td></td> </tr> <tr> <td>Stand.</td> <td></td> <td></td> </tr> </tbody> </table>	Techn. Character.			Scale /	Detail.	Dat.	Name		06.05.08	J.S.	Insp.			Stand.			Free size tolerances  Har-link male DE IEEE1355 cabling double shielded cable assembly, **m
Techn. Character.			Scale /															
Detail.	Dat.	Name																
	06.05.08	J.S.																
Insp.																		
Stand.																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Mod.</th> <th>Dat.</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	Mod.	Dat.	Name					<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%; text-align: center;"> <b>TB 33 27 24x xxx 00xx</b> </td> <td style="width: 20%; text-align: center;">           Page /         </td> </tr> <tr> <td style="text-align: center;">Sub.</td> <td></td> </tr> </table>	<b>TB 33 27 24x xxx 00xx</b>	Page /	Sub.							
Mod.	Dat.	Name																
<b>TB 33 27 24x xxx 00xx</b>	Page /																	
Sub.																		