



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Wiha Insulated T-handles

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505-01, New VDE 0682/part 201, DIN 7437, NFPA70E

Responds to OSHA's use specification 29 CFR1910


Each tool individually tested to 10,000 volts and certified to 1000 Volt ac or 1500 Volt dc



Insulation
molded directly onto blade for permanent bonding

Blade
CVM tool steel, hardened to average 58/60RC

1000V

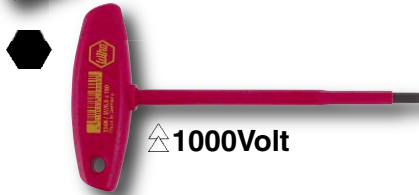

1000Volt

SHOP

334 Inch T-handle, With Wiha-Molded Handle Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E, up to 1000 Volt. Individually Tested.

Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item No.	Inch	Inch	Inch	mm	lbs.	pkg.
334 81	5/32	5.9	6.9	176	.09	10
334 82	3/16	5.9	6.9	176	.15	10
334 83	7/32	5.9	6.9	176	.19	10
334 85	1/4	6.9	6.9	176	.20	10
334 86	5/16	6.9	6.9	176	.26	10
334 87	3/8	6.9	6.9	176	.44	10



1000Volt

SHOP

334 Metric T-handle, With Wiha-Molded Handle Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E, up to 1000 Volt. Individually Tested.

Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item No.	mm	mm	Inch	mm	Inch	lbs.	pkg.
334 41	4.0	150	5.9	176	6.9	.09	10
334 43	5.0	150	5.9	176	6.9	.15	10
334 45	6.0	150	5.9	176	6.9	.18	10
334 47	8.0	150	5.9	176	6.9	.26	10



1000Volt

SHOP

334 90 Set 6 Pcs. Inch T-handle Hex

Item No.	Inch	Inch	Inch	Inch	lbs.
334 90	334 81	5/32	6.9	334 85	1/4 6.9
	334 82	3/16	6.9	334 86	5/16 6.9
	334 83	7/32	6.9	334 87	3/8 6.9



1000Volt

SHOP

334 91 Set 4 Pcs. Metric T-handle Hex

Item No.	mm	mm	mm	mm	.99 lbs.
334 91	334 41	4.0	150	334 45	6.0 150
	334 43	5.0	150	334 47	8.0 150