



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



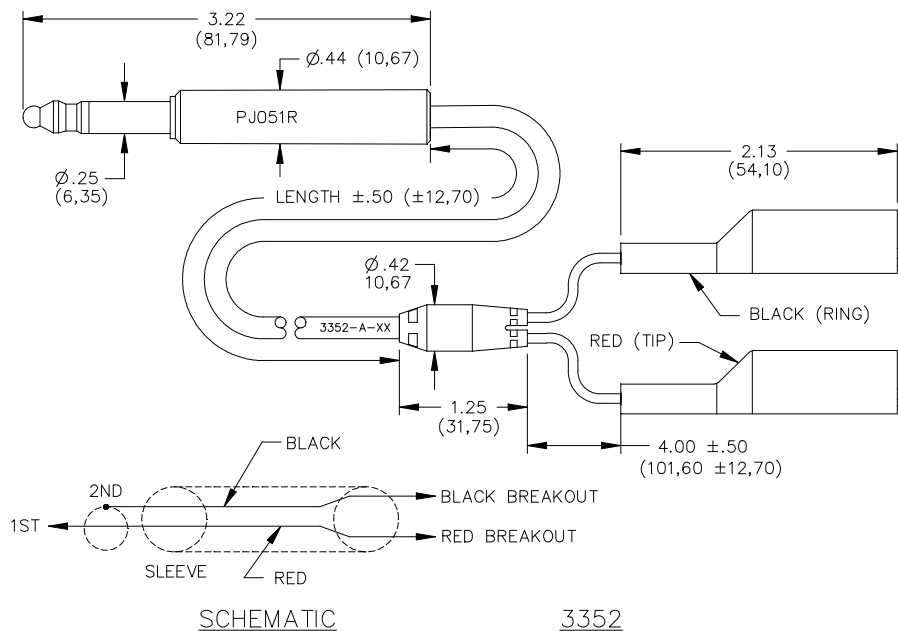

FEATURES:

- Converts WE310 (PJ-051) Female into Alligator clips.
- Length other than those specified are available on request.

MATERIALS:

Conn: 1st End – PJ-051 Phone Plug

Material: Body – Brass

Handle – Nylon. Color: Red.

Cable:

2 Cond. Twisted Pair – 18 AWG stranding

65 X 36 t.c., Vinyl insulation.

Marking “POMONA 3352-A-*”. Color: Gray

Breakout: PVC molded to breakout leads and cable.

Color matches color of cable.

Breakout Leads:

20 AWG stranding 41 X 36 t.c., PVC insulated, 2.21 (.087) O.D. Color matches color of insulator.

Conn: 2nd End – Insulated Alligator Clips

Material: Steel

Finish: Nickel plated. Insulation: Vinyl.

Color: Black and red.

RATINGS:

Operating Temperature: +50° C (+122° F) Max.

Operating Voltage: 150VRMS/DC

Current: 5 Amperes

ORDERING INFORMATION:

Model 3352-A-XX


XX=Cable Length, Standard Length: 60” (1524 mm)

Ordering Example: 3352-A-60 (1524 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

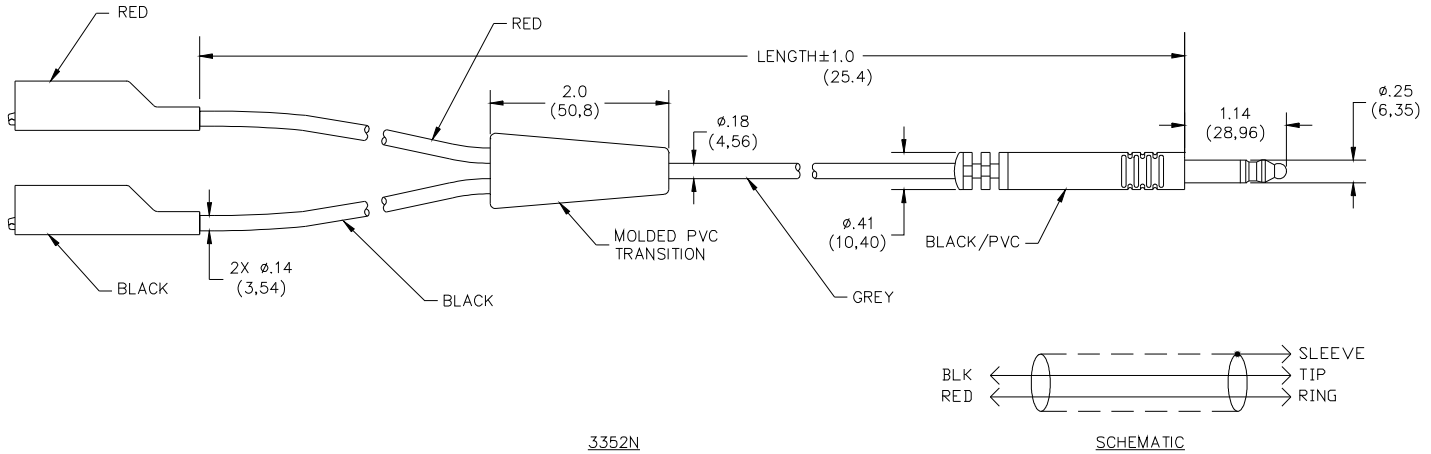

FEATURES:

- Shielded cable to reduce noise
- Provides quick access from WE-310 jack to terminals
- WE-310 Plug molded to the cable to provide optimum durability

MATERIALS:

Plug – Nickel plated brass

Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation

Breakout – Molded

Alligator – Nickel plated steel, Insulator - vinyl

RATINGS:

Operating Voltage – 150 VRMS

Operating Temperature - 122°F (50°C)

ORDERING INFORMATION: Model 3352N-A-XX

XX = Cable Length, Standard Length: 60" (1524 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA