



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

Hybrid fibre optic cable, multi mode, double ended
 2 x G50/125 + 3 x 2.5 mm²

Length: a = 1 m AC version
 DC version

 a = 5 m AC version
 DC version

 a = 10 m AC version
 DC version

 a = 20 m AC version
 DC version

 a = 40 m AC version
 DC version

 a = 50 m AC version
 DC version

 a = 100 m AC version
 DC version

33 57 211 0015 001
 33 57 211 0015 002

33 57 211 0055 001
 33 57 211 0055 002


33 57 211 0105 001
 33 57 211 0105 002

33 57 211 0205 001
 33 57 211 0205 002


33 57 211 0405 001
 33 57 211 0405 002

33 57 211 0505 001
 33 57 211 0505 002

33 57 211 1005 001
 33 57 211 1005 002

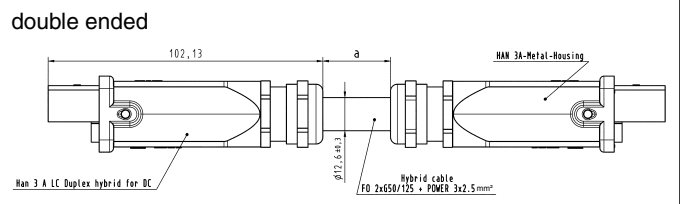

a = length



Protection level: IP 65 / IP 67

Hybrid fibre optic cable, multi mode, single ended
 2 x G50/125 + 3 x 2.5 mm²

Length: a = 1 m AC version
 DC version

 a = 5 m AC version
 DC version

 a = 10 m AC version
 DC version

 a = 20 m AC version
 DC version

 a = 40 m AC version
 DC version

 a = 50 m AC version
 DC version

 a = 100 m AC version
 DC version

33 57 111 0015 001
 33 57 111 0015 002

33 57 111 0055 001
 33 57 111 0055 002


33 57 111 0105 001
 33 57 111 0105 002

33 57 111 0205 001
 33 57 111 0205 002

33 57 111 0405 001
 33 57 111 0405 002

33 57 111 0505 001
 33 57 111 0505 002

33 57 111 1005 001
 33 57 111 1005 002

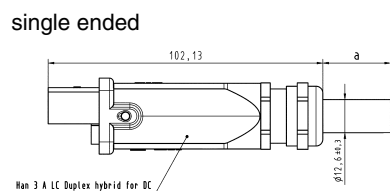


a = length

Hybrid fibre optic cable, multi mode, 50 µm

Length: 10 m 33 57 851 0100 002

Length: 20 m 33 57 851 0200 002

Length: 500 m 33 57 851 5000 002



PVC jacket

2 x G50/125 + 3 x 2.5 mm²

Outer diameter: 12.6 mm

Min. bending radius:

single: 5 x OD

repeated: 10 x OD