

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

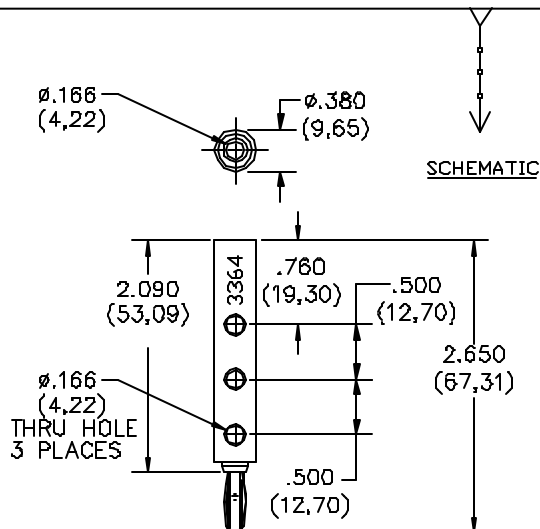

FEATURES:

- Allows four parallel connectors to the same point.
- 3 cross .166 dia. holes
- 4.2 (.166) dia., provide side stackup connection.

MATERIALS:

Upper Conn.: Banana Jack

Material: Brass per QQ-B-626. Alloy 360 ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200 to 300 microinches.

Insulation: ABS molded to Banana Jack and Banana Plug Body.

Color: See Tab Block

Marking: "POMONA ELECTRONICS 3364."

Lower Conn.: Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 170, Cond. H.T.

Body: Same as Upper Conn.

RATINGS:

Operating Temperature: +50° C (+122° F) Max.

Operating Voltage: 5000 VDC.

Current: 15 Amperes Cont.

Contact Resistance: Less than 1 milliohm.

ORDERING INFORMATION: Model 3364-*

*= Color, -0 Black, -2 Red

Ordering Example: 3364 -2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA