



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



pH/Conductivity/TDS/ORP/Salinity Meter

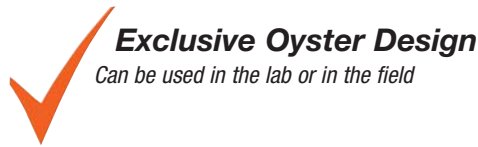

Exclusive Oyster Design

Can be used in the lab or in the field

Features:

- Large LCD built into adjustable “flip-up” cover displays measurement and Temperature simultaneously
- Microprocessor based with splash proof housing and front panel tactile touch pad to slope and calibrate
- Rugged design for handheld or benchtop use; neckstrap for “hands-free” operation
- Memory function stores and recalls 25 labeled readings
- Low Battery indicator and Auto Shut off after 10 minutes of non-use
- Automatic Temperature Compensation for Conductivity/TDS via thermistor built into conductivity cell
- Manual Temperature Compensation for pH (0 to 100°C)
- Thermistor probe measures from 32 to 194°F (0 to 90.0°C)
- Complete with mini pH electrode, sample buffers, polymer conductivity cell for TDS/Conductivity/Salinity, Thermistor probe, 9V battery, neckstrap and carrying case



Adjustable “Flip-up” display



Side inputs for Conductivity Cell, pH/ORP probe, Thermistor probe, and AC Adaptor



341350A-P kit comes with polymer Conductivity cell, glass pH electrode and Thermistor probe

Specifications	Range	Resolution	Basica Accuracy
pH	0.01 to 14.00pH	0.01pH	±0.02pH
Conductivity	10 to 19,990µS	0.1µS	±2%FS
TDS	10 to 19,990ppm (mg/L)	0.1ppm	±2%FS
ORP	-1500mV to 1500mV	1mV	±3mV
Salinity	0 to 10.00ppt	0.01ppt	±2%FS
Temperature	32.0°F to 194.0°F (0.0°C to 90.0°C)	0.1°	±2°F/1°C
Dimensions	3.7 x 4.2 x 2" (96 x 108 x 45mm)		
Weight	12oz (340g)		

Ordering Information:

- 341350A-PpH/Conductivity/TDS/ORP/Salinity Meter (Polymer cell)
- 341350A-P-NIST ..pH/Conductivity/TDSORP/Salinity Meter (Polymer) w/NIST
- 804010AReplacement Polymer Conductivity Cell
- 60120BReplacement Mini pH Electrode
- 850190Replacement Thermistor Probe

