



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|--------------------|---------|--------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| G | 14 | K | REV / 0720-0584-95 | 11APR95 | MLE SB |

| | | |
|--------------------------------|--------------------------------|--------------------------------|
| AMP WIRE RANGE | E13288 | LR7189 Certified |
| 12-10 AWG SOLID OR STRANDED | 12-10 AWG SOLID OR STRANDED | 12-10 AWG SOLID OR STRANDED |

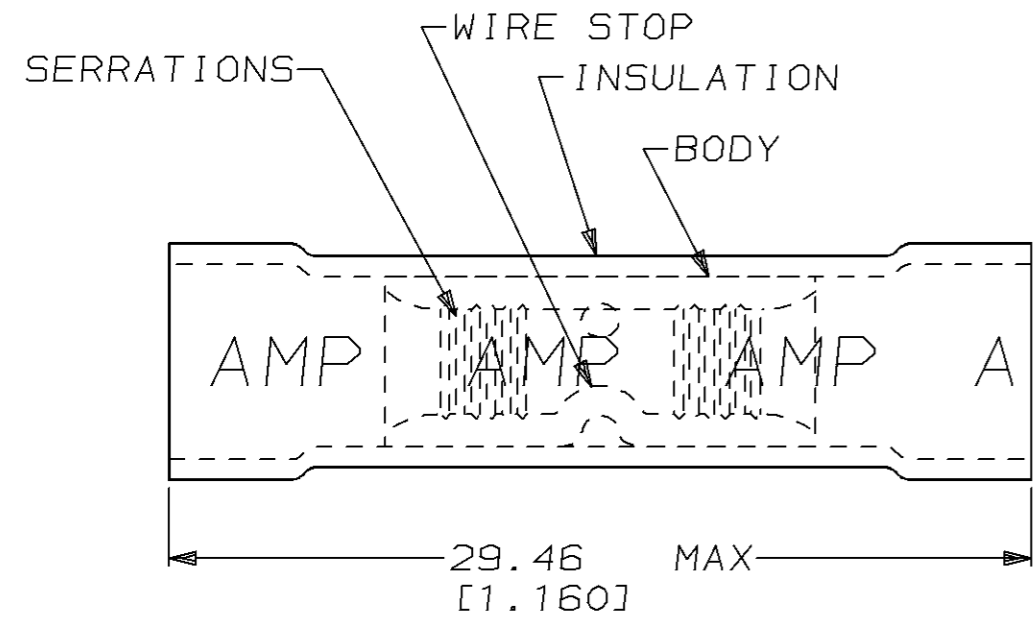

STYLE I

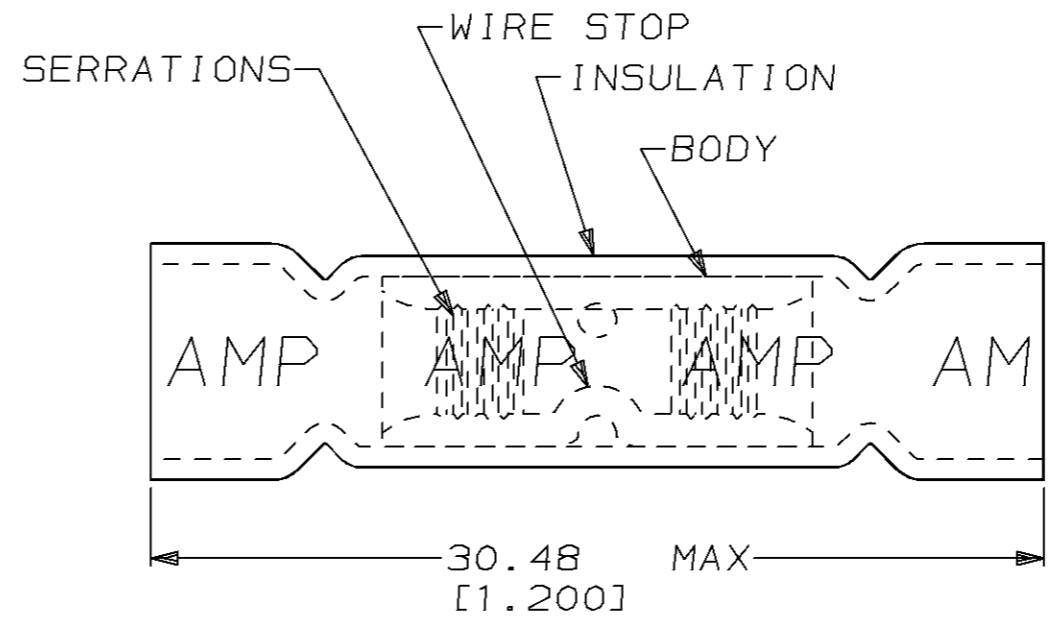

STYLE II

1. WIRE INSUL DIA,
3.81-6.35 [.150-.250]

| STYLE | QTY | PACKAGE TYPE | PART NO |
|-------|------|------------------|-----------|
| I | 50 | LOOSE PIECE, BOX | 8-34945-2 |
| II | 2000 | ON TAPE, REEL | 2-34945-2 |
| II | 500 | LOOSE PIECE | 2-34945-1 |
| I | 500 | LOOSE PIECE | 34945 |

| | | | | | | |
|--|--|--|--|---|------------------------------|--|
| AMP INCORPORATED CUSTOMER SERVICE SYSTEM | | MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194°F] | THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. | | DWN M ELLIS 03APR95 | AMP AMP Incorporated Harrisburg, PA 17105-3608 |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER 1-800-522-6752 | | DIMENSIONS: mm [in] | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK C PRESNELL 03APR95 | |
| FOR APPLICATION TOOLING INFORMATION | TOOLING ASSISTANCE CENTER 1-800-722-1111 | VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS) | | 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- | PRODUCT SPEC UL486A | SPLICE, BUTT, PLASTI-GRIP™, WIRE SIZE, 12-10 AWG |
| FOR ORDER ENTRY | 1-800-526-5142 | CIRCULAR MIL AREA: 2.62mm²-6.64mm² [5180-13100] | MATERIAL BODY, CU ASTM B 152 PVC, COLOR, YELLOW | FINISH TIN PLATE PER MIL-T-10727 | APPLICATION SPEC - | |
| | | | | | WEIGHT - | CAGE CODE 00779 |
| | | | | | CUSTOMER DRAWING | DRAWING NO C-34945 |
| | | | | | | SCALE 4:1 |
| | | | | | | SHEET 1 OF 1 |
| | | | | | | REV K |