



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**TXW SERIES**

105°C Long Life(7000~10000 hours), Miniaturized

◆FEATURES

- Load Life : 105°C 7000-10000 hours.
- Body diameter of φ6.3 to φ18mm with high ripple current capability.
- RoHS compliance.

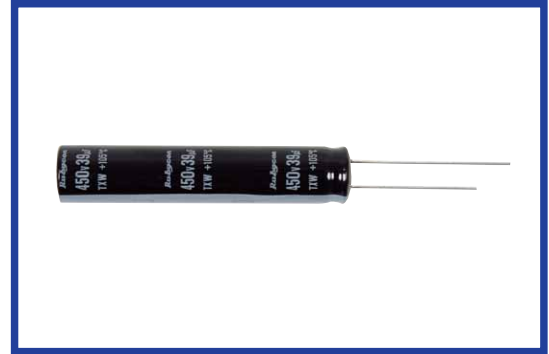

◆SPECIFICATIONS

Items	Characteristics																															
Category Temperature Range	-40~+105°C	-25~+105°C																														
Rated Voltage Range	35~100V.DC	160~450V.DC																														
Capacitance Tolerance	±20% (20°C, 120Hz)																															
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2minutes)																															
	I=3√CV (After 5 minutes application of rated voltage)																															
	I=Leakage Current(μA)	C=Capacitance(μF)      V=Rated Voltage(V)																														
(tanδ) Dissipation Factor(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> <th>160~400</th> <th>420~450</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.08</td> <td>0.20</td> <td>0.25</td> </tr> </tbody> </table>							Rated Voltage (V)	35	50	63	80	100	160~400	420~450	tanδ	0.12	0.10	0.09	0.08	0.08	0.20	0.25	(20°C, 120Hz)								
	Rated Voltage (V)	35	50	63	80	100	160~400	420~450																								
tanδ	0.12	0.10	0.09	0.08	0.08	0.20	0.25																									
Endurance	After life test with rated ripple current at conditions stated in the table below at 105°C, the capacitors shall meet the following requirements.																															
		35~100V.DC			160~450V.DC			Case Size	Life Time (hrs)																							
	Capacitance Change	Within ±25% of the initial value.			Within ±20% of the initial value.			φ6.3	7000																							
	Dissipation Factor	Not more than 200% of the specified value.							φD≥8	10000																						
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> <th>160~250</th> <th>350~450</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>8</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>—</td> <td>—</td> </tr> </tbody> </table>							Rated Voltage (V)	35	50	63	80	100	160~250	350~450	Z(-25°C)/Z(20°C)	2	2	2	2	2	3	8	Z(-40°C)/Z(20°C)	3	3	3	3	3	—	—	(120Hz)
	Rated Voltage (V)	35	50	63	80	100	160~250	350~450																								
	Z(-25°C)/Z(20°C)	2	2	2	2	2	3	8																								
Z(-40°C)/Z(20°C)	3	3	3	3	3	—	—																									

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency Coefficient  
(35~100WV)

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	33μF	0.42	0.70	0.90	1.00
	39~270μF	0.50	0.73	0.92	1.00
	330~680μF	0.55	0.77	0.94	1.00
	820~1800μF	0.60	0.80	0.96	1.00

(160~450WV)

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	160~250WV	0.80	1.00	1.20	1.30	1.40
	350~450WV	0.80	1.00	1.25	1.40	1.50

◆OPTION

	Code
PET Sleeve	EFC

◆PART NUMBER

□□□    TXW    □□□□□    M    □□□    □□    D×L  
 Rated Voltage    Series    Capacitance    Capacitance Tolerance    Option    Lead Forming    Case Size

**◆ DIMENSIONS**

(mm)

$\phi D$	6.3	8	10	12.5	16	18
$\phi d$	0.5	0.6			0.8	
F	2.5	3.5	5.0		7.5	
$\alpha$	35~100V.DC	2.0			-	
	160~450V.DC	-	2.5			

**◆ STANDARD SIZE**

Rated Voltage (V.DC)	Capacitance ( $\mu F$ )	Size $\phi D \times L$ (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
35	180	6.3×25	0.605	1.21
	220	6.3×30	0.685	1.37
	330	6.3×40	0.924	1.68
	390	6.3×50	1.11	2.02
	390	8×25	0.951	1.73
	470	8×30	1.11	2.03
	680	8×40	1.41	2.57
	820	8×50	1.82	3.04
	820	10×30	1.48	2.47
	1000	8×60	2.08	3.48
	1200	10×40	1.87	3.12
	1500	10×50	2.21	3.69
	1800	10×60	2.50	4.17
50	100	6.3×25	0.510	1.02
	120	6.3×30	0.580	1.16
	180	6.3×40	0.710	1.42
	220	6.3×50	0.860	1.72
	220	8×25	0.740	1.48
	270	8×30	0.870	1.74
	390	8×40	1.22	2.23
	470	8×50	1.45	2.65
	470	10×30	1.22	2.22
	560	8×60	1.68	3.07
	680	10×40	1.55	2.82
	820	10×50	2.02	3.37
	1000	10×60	2.31	3.86
63	82	6.3×25	0.455	0.910
	100	6.3×30	0.515	1.03
	150	6.3×40	0.635	1.27
	180	6.3×50	0.775	1.55
	180	8×25	0.665	1.33
	220	8×30	0.785	1.57
	330	8×40	1.11	2.02
	390	8×50	1.32	2.41
	390	10×30	1.16	2.10
	470	8×60	1.54	2.80
	560	10×40	1.43	2.60
	680	10×50	1.71	3.12
	820	10×60	2.15	3.59

Rated Voltage (V.DC)	Capacitance ( $\mu F$ )	Size $\phi D \times L$ (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
80	47	6.3×25	0.455	0.910
	56	6.3×30	0.515	1.03
	82	6.3×40	0.635	1.27
	100	6.3×50	0.775	1.55
	100	8×25	0.665	1.33
	120	8×30	0.785	1.57
	180	8×40	1.01	2.02
	220	8×50	1.20	2.41
	220	10×30	1.05	2.10
	270	8×60	1.40	2.80
	270	10×40	1.30	2.60
	390	10×50	1.71	3.12
	470	10×60	1.97	3.59
	100	33	6.3×25	0.382
39		6.3×30	0.515	1.03
56		6.3×40	0.635	1.27
68		6.3×50	0.775	1.55
82		8×25	0.665	1.33
100		8×30	0.785	1.57
120		8×40	1.01	2.02
150		8×50	1.20	2.41
150		10×30	1.05	2.10
220		8×60	1.40	2.80
220		10×40	1.30	2.60
270		10×50	1.56	3.12
330		10×60	1.97	3.59



**◆ STANDARD SIZE**

Rated Voltage (V.DC)	Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
160	56	8×25	0.32	0.448
	68	8×30	0.37	0.518
	82	8×35	0.43	0.602
	82	10×25	0.43	0.602
	100	8×40	0.49	0.686
	120	8×55	0.57	0.798
	120	10×30	0.54	0.756
	150	10×40	0.67	0.938
	150	12.5×25	0.66	0.924
	180	10×50	0.80	1.12
	180	12.5×30	0.77	1.07
	220	10×60	0.94	1.31
	220	12.5×35	0.89	1.24
	220	16×25	0.93	1.30
	270	12.5×40	1.01	1.41
	330	12.5×50	1.20	1.68
	330	16×30	1.20	1.68
	330	18×25	1.18	1.65
	390	12.5×55	1.35	1.89
	390	16×35	1.34	1.87
390	18×30	1.40	1.96	
470	16×40	1.52	2.12	
470	18×35	1.58	2.21	
560	16×50	1.79	2.50	
560	18×40	1.78	2.49	
680	18×45	2.00	2.80	
820	18×50	2.23	3.12	
200	39	8×25	0.30	0.420
	56	8×30	0.37	0.518
	68	8×40	0.45	0.630
	68	10×25	0.43	0.602
	82	8×45	0.51	0.714
	82	10×30	0.50	0.700
	100	8×55	0.60	0.840
	100	10×40	0.63	0.882
	120	10×45	0.75	1.05
	120	12.5×25	0.65	0.910
	150	10×50	0.83	1.16
	150	12.5×30	0.80	1.12
	180	10×60	0.91	1.27
	180	12.5×35	0.92	1.28
	180	16×25	0.85	1.19
	220	12.5×45	1.09	1.52
	220	16×30	1.01	1.41
	220	18×25	1.00	1.40
	270	12.5×50	1.26	1.76
	270	16×30	1.18	1.65
	270	18×30	1.16	1.62
	330	12.5×60	1.36	1.90
	330	16×40	1.31	1.83
	330	18×30	1.30	1.82
	390	16×45	1.43	2.00
	390	18×35	1.43	2.00
470	16×50	1.58	2.21	
470	18×40	1.58	2.21	
560	18×45	1.77	2.47	

Rated Voltage (V.DC)	Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
220	100	10×40	0.66	0.924
	120	10×45	0.75	1.05
	120	12.5×30	0.74	1.03
	150	12.5×35	0.86	1.20
	150	16×25	0.80	1.12
	180	12.5×40	0.99	1.38
	180	16×30	0.94	1.31
	220	12.5×50	1.08	1.51
	220	16×30	1.01	1.41
	220	18×25	0.94	1.31
	270	16×35	1.19	1.66
	270	18×30	1.13	1.58
	330	18×35	1.30	1.82
	390	18×40	1.49	2.08
	470	18×45	1.69	2.36
	250	27	8×25	0.30
39		8×30	0.37	0.518
47		8×35	0.45	0.630
47		10×25	0.37	0.518
56		8×40	0.51	0.714
56		10×30	0.42	0.588
68		8×50	0.59	0.826
68		10×35	0.49	0.686
82		10×40	0.61	0.854
82		12.5×25	0.54	0.756
100		10×45	0.68	0.952
100		12.5×30	0.69	0.966
120		10×55	0.73	1.02
120		12.5×35	0.79	1.10
120		16×25	0.74	1.03
150		12.5×40	0.92	1.28
150		16×30	0.89	1.24
180		12.5×50	0.97	1.35
180		16×30	0.95	1.33
180		18×25	0.88	1.23
220	12.5×55	1.13	1.58	
220	16×35	1.11	1.55	
220	18×30	1.10	1.54	
270	16×40	1.27	1.77	
270	18×35	1.23	1.72	
330	16×50	1.48	2.07	
330	18×40	1.42	1.98	
390	18×45	1.59	2.22	
470	18×50	1.83	2.56	

**◆ STANDARD SIZE**

Rated Voltage (V.DC)	Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
350	22	8×30	0.25	0.375
	27	8×35	0.29	0.435
	33	8×40	0.33	0.495
	33	10×25	0.31	0.465
	39	8×45	0.37	0.555
	39	10×30	0.36	0.540
	47	8×60	0.43	0.645
	47	10×35	0.41	0.615
	56	10×40	0.47	0.705
	68	10×55	0.55	0.825
400	12	8×25	0.17	0.255
	15	8×30	0.20	0.300
	18	8×35	0.23	0.345
	22	8×40	0.26	0.390
	22	10×25	0.24	0.360
	27	8×45	0.30	0.450
	27	10×30	0.29	0.435
	33	8×55	0.35	0.525
	33	10×35	0.33	0.495
	39	10×40	0.40	0.600
	39	12.5×25	0.36	0.540
	47	10×45	0.45	0.675
	47	12.5×30	0.44	0.660
	56	10×50	0.52	0.780
	56	12.5×35	0.50	0.750
	68	12.5×40	0.58	0.870
	68	16×25	0.51	0.765
	82	12.5×45	0.65	0.975
	82	16×30	0.61	0.915
	82	18×25	0.61	0.915
	100	12.5×60	0.75	1.12
	100	16×35	0.74	1.11
	100	18×30	0.74	1.11
	120	16×40	0.80	1.20
	120	18×35	0.79	1.18
	150	16×50	0.95	1.42
150	18×40	0.91	1.36	
180	18×45	1.04	1.56	

Rated Voltage (V.DC)	Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
420	12	8×30	0.13	0.195
	15	8×35	0.17	0.255
	18	8×40	0.20	0.300
	22	8×50	0.25	0.375
	33	10×40	0.37	0.555
	39	10×45	0.41	0.615
	39	12.5×30	0.39	0.585
	47	12.5×35	0.45	0.675
	56	12.5×40	0.52	0.780
	56	16×25	0.46	0.690
	68	12.5×45	0.58	0.870
	68	16×30	0.55	0.825
	82	12.5×50	0.66	0.990
	82	16×35	0.63	0.945
	82	18×25	0.56	0.840
	100	16×40	0.73	1.09
	100	18×30	0.67	1.00
	450	120	18×35	0.77
150		18×40	0.90	1.35
12		8×30	0.15	0.225
15		8×40	0.19	0.285
18		8×45	0.21	0.315
33		10×40	0.36	0.540
33		12.5×30	0.37	0.555
39		10×50	0.41	0.615
39		12.5×35	0.42	0.630
47		12.5×40	0.48	0.720
47		16×25	0.44	0.660
56		12.5×45	0.53	0.795
56		16×30	0.51	0.765
68		12.5×50	0.62	0.930
68		16×35	0.59	0.885
68		18×25	0.57	0.855
82		16×40	0.68	1.02
82		18×30	0.65	0.975
100	18×35	0.74	1.11	
120	18×40	0.83	1.24	
150	18×45	0.95	1.42	