



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 3548 Miniature Banana Jack To Solderless Pin Tip Plug With Safety Collar

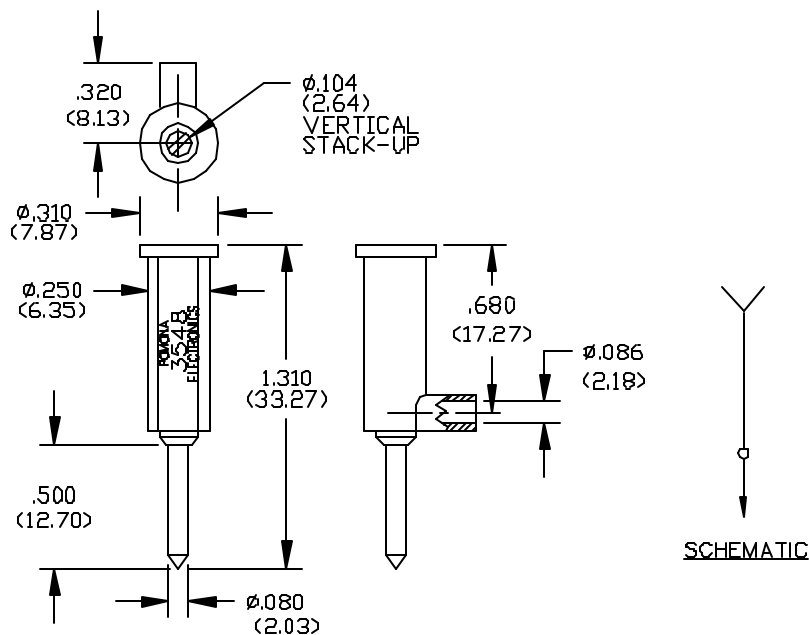

FEATURES:

- This integral collar insulates exposed wire leads and acts as a strain relief by preventing the flexing of the lead at the set screw.
- Wire firmly held in place with internal set screw.

MATERIALS:

Upper Conn.: Miniature Banana Jack

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class 1, 200 to 300 micro-inches.

Insulation: ABS molded to Banana Jack and Pin Tip Plug.

Marking: "POMONA ELECTRONICS, 3548".

Lower Conn.: Pin Tip Plug

Material: Same as Upper Conn.

Finish: Same as Upper Conn.

Cross Hole: 2.08 (.082) dia. with #3-56 slotted set screw to secure wire lead.

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 3000 VDC

Current: 5 Amperes Cont.

ORDERING INFORMATION: Model 3548-*

*=Color, -0 Black -2 Red, Ordering Example: 3548-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA