



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FOR .205 (5.2) × .025 (.64) STANDARD BLADE FUSES


For Littelfuse ATOF 257 series/Bussmann ATC series or equivalent

- Holds fuse securely, even after multiple insertions
- Thru hole-mount, maintains position during wave soldering
- Withstands the rigors of shock and vibration
- Holder design prevents solder wicking



VERTICAL FUSE ENTRY

SPECIFICATIONS


Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: Nylon, UL Rated 94V-0
UL Current Rating: 20 Amps @ 500V AC
UL Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips



Mounting Detail For Two Clips



3522-2

3522-3

CAT. NO. 3522-2



CAT. NO. 3522-3

VERTICAL ENTRY


SPECIFICATIONS

Contacts: .016 (.41) Brass
UL Current Rating: 30 Amps @ 500 VAC

Mounting Detail For Two Clips



LOW INSERTION FORCE



CAT. NO. 3522 Tin-Nickel Plate

CAT. NO. 3573 Matte Tin Plate

2 IN 1 FUSE HOLDER


For Littelfuse ATOF 257 series/Bussmann ATC series, Littelfuse Low Profile Mini 897 series or equivalents

- Low insertion force
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Thru hole PC mountable, maintains position during wave soldering


SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: Nylon 4/6, UL Rated 94V-0
UL Current Rating: 30 Amps @ 500V AC
UL Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Mounting Detail




Mounting Detail



UNIVERSAL CLIP

For Littelfuse ATOF 257 series/Bussmann ATC series, Littelfuse Mini 297 or 997 series/Bussmann ATM series, Littelfuse Low Profile Mini 897 series or equivalents

- Accepts most Auto-Blade Fuses
- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering



CAT. NO. 3557 - Top Entry

CAT. NO. 3577 - Bottom Entry

CAT. NO. 3557-2




HORIZONTAL FUSE ENTRY

- Designed for low height clearance applications
- Fuse will be inserted parallel to board
- Thru hole mount, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Polarized legs assure proper orientation of clips onto board

SPECIFICATIONS

Contacts: .012 (.30) Brass, Nickel Plate
Insulator: Nylon, UL Rated 94V-0
UL Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Mounting Detail For Two Clips

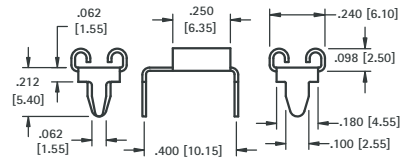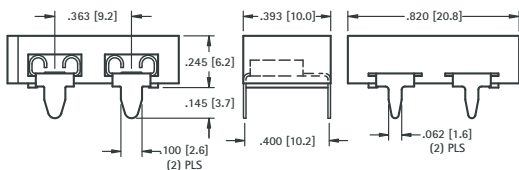

CAT. NO. 3550-2 UL Current Rating: 20 Amps @ 500V AC

UL Current Rating: 30 Amps @ 500V AC CAT. NO. 3550