

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







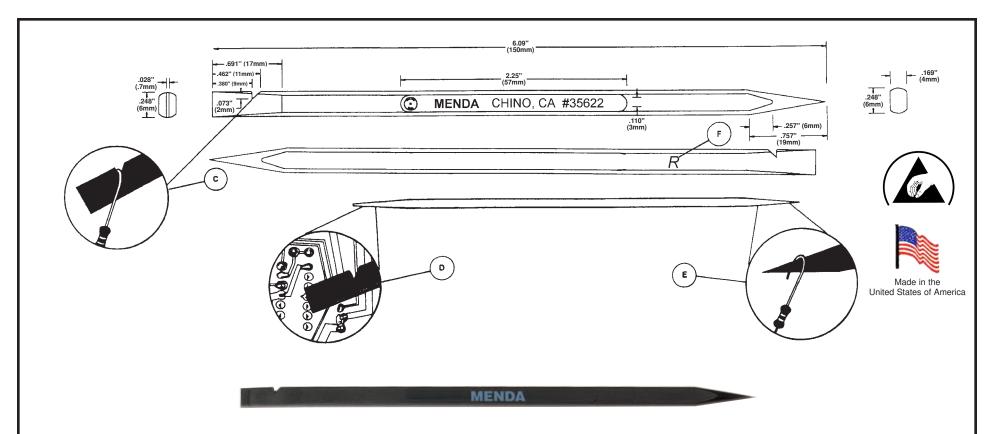

- A. MATERIAL: 15% Glass Filled Supertough Nylon
- **B**. The hygroscopic (readily accepts moisture) properties of Nylon will make this tool suitable for use around ESD sensitive components after a few minutes of handling the tool with bare hands. If used with gloves in a clean environment the tools must be dipped in a topical antistatic solution before use in sensitive areas. Topical treatment should be repeated at six month intervals. Without exposure to moisture or antistatic treatment, Nylon is in the insulative resistance range and charges will not be removed to ground.
- **C**. Notch for hooking and pulling wires or components.
- **D**. Flat "screwdriver" surface for spudging wire leads down flat on circuit boards.
- **E**. Pointed end for forming wire leads or for use as pointer probe for holding objects for soldering.
- **F**. Date Code (R=2006, S= 2007, T=2008, etc.)

Melting Point: 450°F (232°C)

Specifications and procedures subject to change without notice.



PROBER, SOLDERING TOOL, NYLON

3651 WALNUT AVE., CHINO, CA 91710 PHONE: (909) 627-2453 FAX: (951) 755-8848

WEBSITE: MendaPump.com

DRAWING NUMBER 35622 DATE: April 2011