



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LOC	DIST	REVISIONS				DAP		
		P	LTR	DESCRIPTION		DATE	DWN	APVD
G	14		D2	REVISED PER ECO-11-005027		11MAR11	RK	HMR

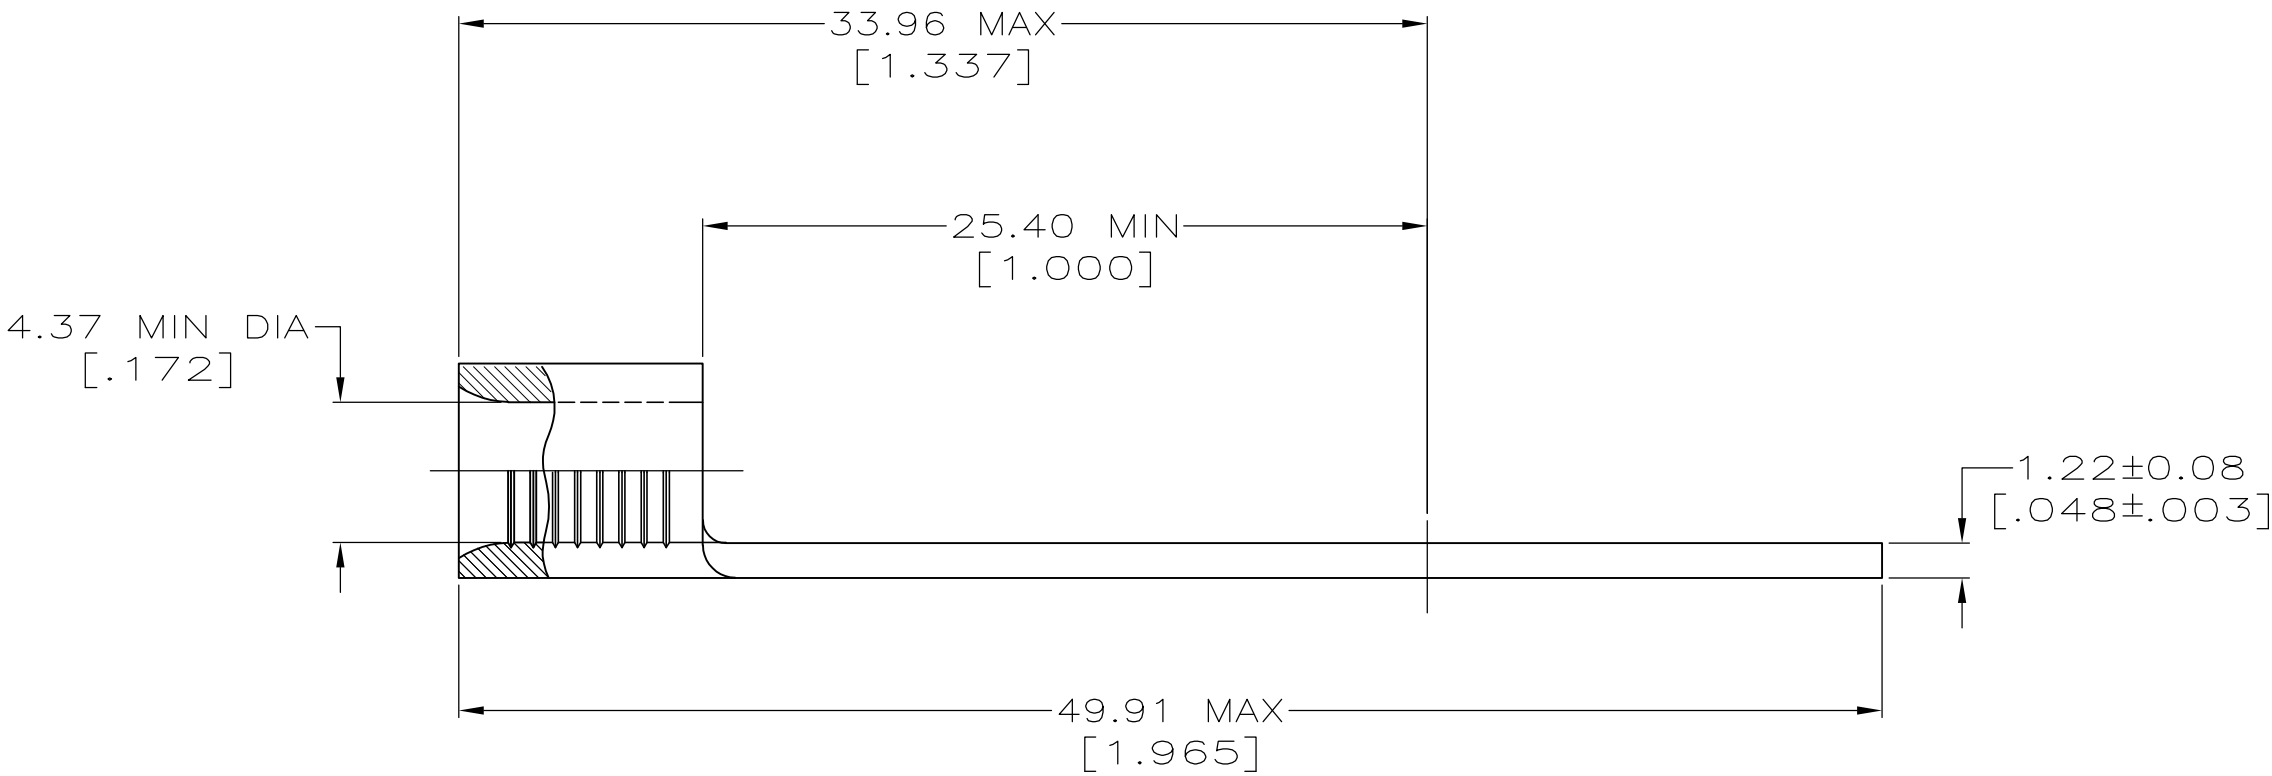
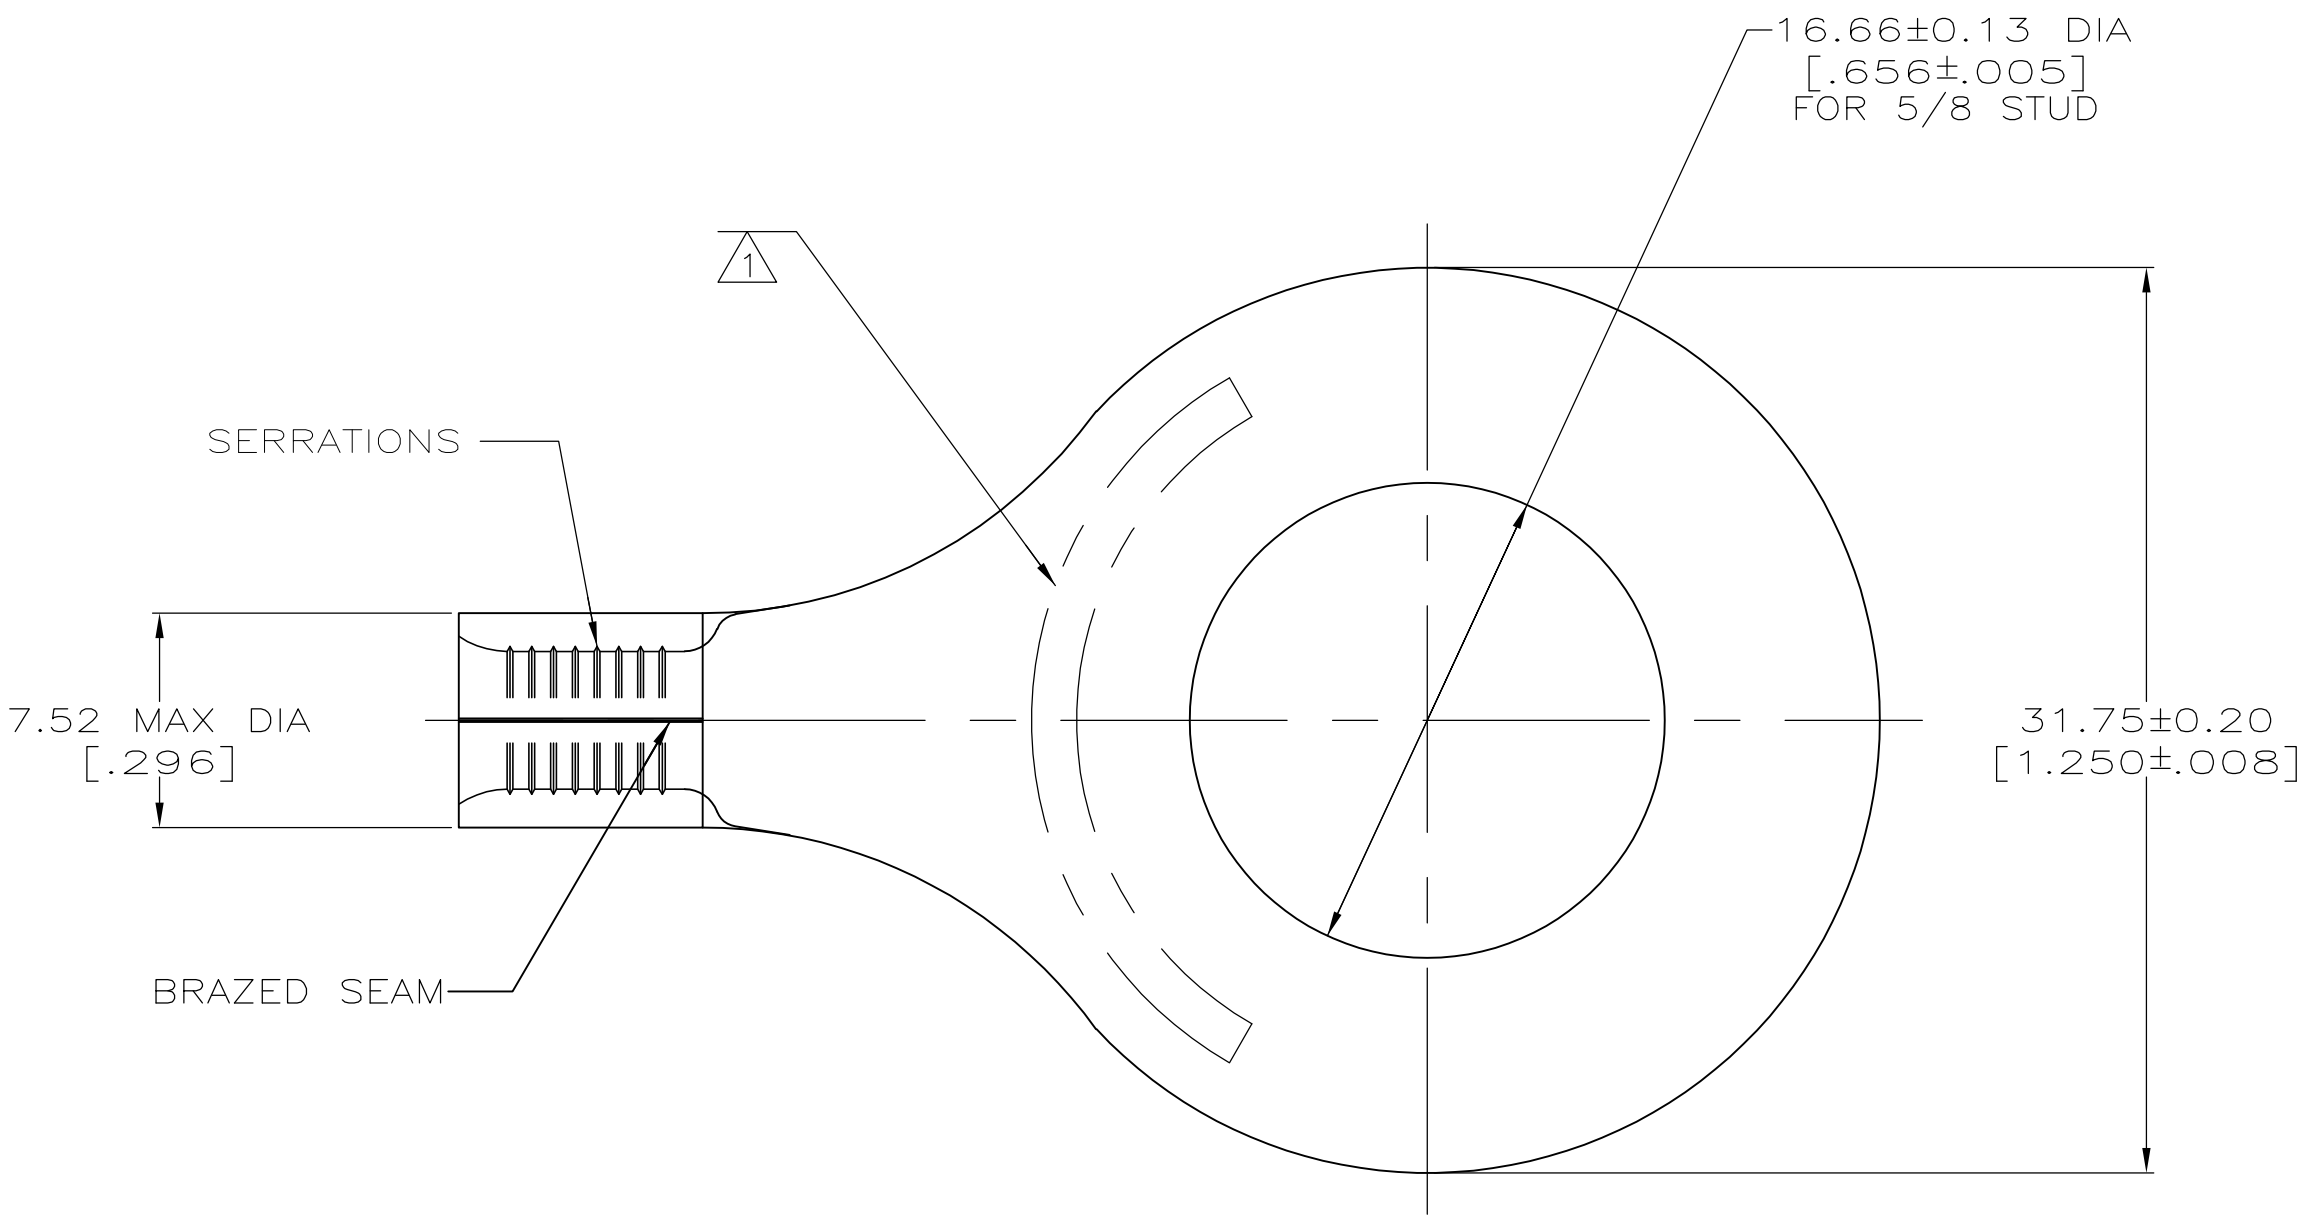
 WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
8 AWG SOLID OR STRANDED	8 AWG STRANDED	8 AWG SOLID OR STRANDED





- 1

STAMP AMP 8* APPROX AS SHOWN
- 2

COPPER PER ASTM B-152, ANNEALED
- 3

TIN PLATE 0.00254 [.000100] MIN THK
PER ASTM B-545



MAX RECOMMENDED OPERATING TEMPERATURE: 170°C	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 3-24-93	<div></div> TE Connectivity					
			CHK DA PATTERSON 3-24-93						
VOLTAGE RATING: N/A	DIMENSIONS: mm[INCHES]	<div></div>	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± ± - FINISH	APVD JL MECKLEY 3-24-93	NAME TERMINAL, RING TONGUE, SOLISTRAND -				
				PRODUCT SPEC -					
CIRCULAR MIL AREA: 6.64-10.5mm² [13,100-20,800] SOLID OR STRANDED	<div></div>	<div></div>	APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
			WEIGHT -	A2	00779	C-35665	-		
			CUSTOMER DRAWING				SCALE	4:1	SHEET