

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China















Part Number: 3570 1333

Instrumentation Grade SIP - 1 Form A

Product Data Sheet

PICTURE



FEATURES

- High Reliability Instrumentation Grade reed switch with sputtered Ruthenium contacts.
- SIP 1 Form A 10 W dry reed relays
- · Ideal for test and instrumentation applications.
- High Insulation Resistance : $10^{12} \Omega MIN$
- · Molded thermoset industry standard package.
- Optional internal coil suppression diode.
- UL File E358613 c **Fl**us


✔RoHS Compliant

ORDERING INFORMATION


Series	Coil	Options
3570.1333.	05	1 = no diode
	12	3 = with diode
l	ļ	

Part Number Example: 3570.1333.xxx 3570.1333.051 = 5 volt coil, no diode

SCHEMATIC



DIMENSIONS

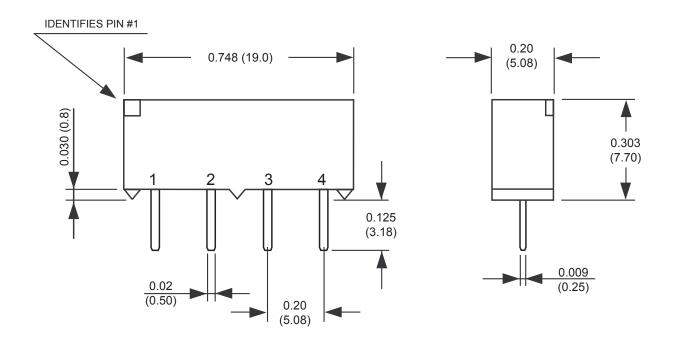

Drawings not to scale.
All dimensions in inches (mm) nominal

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405









Part Number: 3570 1333

Instrumentation Grade SIP - 1 Form A

Product Data Sheet

	COIL DATA-STANDARD TYPE 1 FORM A (at 20°C)				
NOMINAL COIL VOLTAGE (VDC)	NOMINAL COIL RESISTANCE ±10% (Ω)	MAX OPERATE VOLTAGE (VDC)	MIN RELEASE VOLTAGE (VDC)	MAX COIL VOLTAGE (VDC)	
5	500	3.75	0.8	7	
12	1000	9	1	16	

CONTACT RATING				
Max Switching Power	10 W			
Max Switching Voltage	200 VDC			
Max Switching Current	0.5 A			
Max Carry Current	1.5 A			

SPECIFICATION				
Contact Resistance (Initial)	MAX 150 mΩ			
Operate Time - including bounce (Typical)	0.35 ms (At Nominal Voltage)			
Release Time (Typical)	0.1 ms			
Insulation Resistance @ 100V, 20°C, 40% RH (MIN)	$10^{12}\Omega$			
Dielectric Strength (MIN)	Between Open Contacts 200 V DC / peak AC Between Coil to Contacts 1500 V DC / peak AC			
Capacitance Between Open Contacts (Typical)	0.5 pF			
Vibration	20G			
Shock	50G			
Operating Temperature	-40° +85°C			
Storage Temperature	-40° +100°C			
Life Expectancy of Electrical	1000 x 10 ⁶ ops (1 VDC, 10mA)			

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.