

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







PROPRIETARY INFORMATION:		REVISION		
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE, RFS. 6411, JS	06/09/05	BS
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				

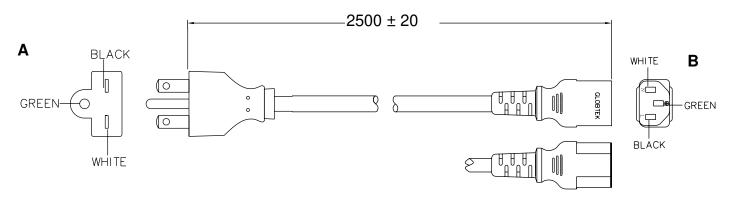

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC CABLE TYPE / SIZE: SJT. 18 AWG X 3C

TEMPERATURE RATING: 60° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: **BLACK**

OVERALL LENGTH (L): 2500 + 20 mm CABLE OUTER DIAMETER: 7.8 + 0.1 mm**END 'A' TERMINATION: NEMA 6-15P** END 'B' TERMINATION: IEC 320 / C13 APPROVALS PLUG: UL. CSA OR cUL APPROVALS CABLE: UL, CSA OR cUL APPROVALS CONNECTOR: UL, CSA OR cUL

PACKING:

DASH

BULK PACKED, BUNDLES OF 25.

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTES:

1. CORD. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Contents of this document

prior notice

are subject to change without



installation instruction.

Globtek Inc. will not be liable for the safety and performance of these power

product if unauthorized access and repair

ble UL,CSA or EN Standards for proper

occurs. End user should consult the applica-

1	Limitation of Use: Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or
ı	aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH NO.	F	PART NO	REV.		DESCRIPTION	NOTES					
TABULATION BLOCK											
			TOLER DECIMALS .xx +/- 0.1 .xxx +/005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Non Tel. 201-784-1000						
INIT.BY:	30	DATE: 06/09/05	MILLIMETER: .xx +/- 0.3 .xxx +/013	ANGULAR +/- 1°	DWG TITLE: NORTH AMERICAN DETACHABLE CORD	SET					
DRAWN:	INF	DATE: 06/09/05	FSCN No.: G, CC	SIZE A	MODEL: N/A	REV.					
APRVD: 1		DATE: 06/09/05	SCALE: NONE		PART NO: 3611068F2701	SHEET 1/1					