



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## PCMCIA Memory Card Extenders

### Features:

- FLEX Versions in 12.0" or 7.0" X 1.75" W  
Will fold 180 degrees with 0.5" radius  
Made of .020" Kapton Polyimide  
(high Tg of 260 C)
- 68-pin to 68-pin
- Keyed for 5V or low-voltage 3.3V cards
- Absorbs wear/tear of frequent insertions and removals
- UL V-O approved materials, RoHS compliant
- Custom Lengths available




P/N 3690-36  
12.0"L



Vector P/N 3690-36 (12.00") or 3690-37 (7.0") for Type II or Type III PCMCIA slots, 68-pin to 68-pin "FLEX" extenders have excellent signal propagation. When used with CF or CFII adapter can be used with digital cameras, modems, handhelds or I/O cards.

Extenders

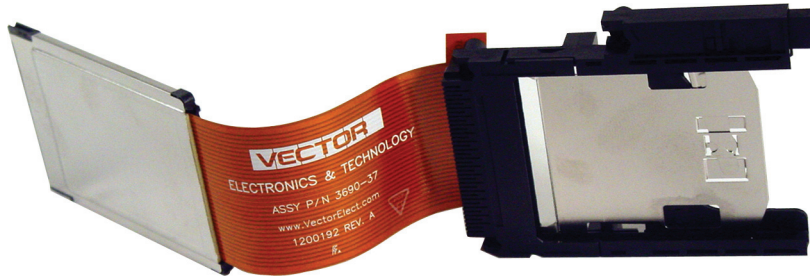


P/N 3690-38 with Ejector-type slot, 7.0" L  
P/N 3690-39 same as 3690-38 but 12" L



## Rigid Extender

### Features

- Fully assembled
- Marked legends
- Test points on all lines
- Dual row headers on 0.100" centers
- Jumper connected PWR & GND
- For Type II or Type III slots
- 68 pin connector

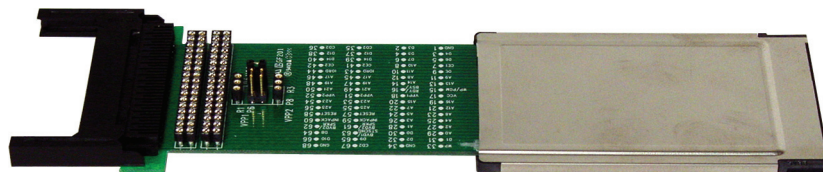

P/N 3690-35

