



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





NEW PRODUCT BULLETIN 633

370DI AUDIOSTIX®

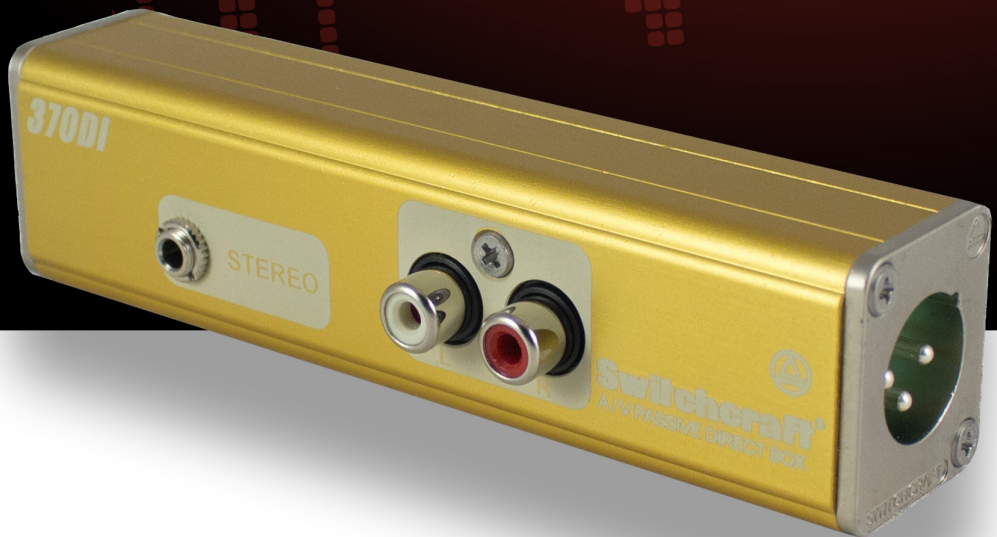

Switchcraft®
Pro Audio



The 370DI is a durable, pocket size, Direct Box which is a cross between Switchcraft’s SC700CT DI Box and 318 Inline Audio Adapter. The 370DI sums and converts the unbalanced stereo outputs of cell phones, tablets, laptops and consumer gear to a balanced mono line level for connecting to audio consoles and house sound systems.

FEATURES & BENEFITS

- Dual RCA inputs
- 3.5MM input (1/8”TRS jack)
- Switchcraft DE Series locking male XLR provides balanced, mono, mic level output
- Ground Lift Switch
- 20db pad to enable the device to handle stronger signals without distortion

APPLICATIONS

- Concert Touring
- House of Worship
- Presentations
- Broadcast facilities

SPECIFICATIONS

Parameter	Performance	Conditions
Frequency Response	20Hz - 20kHz	+/-2dB, ref 1kHz.
Total Harmonic Distortion + Noise	0.12%	at 1kHz, with Pad OFF
Maximum input level, Pad OFF	20	dBV
Maximum input level, Pad ON	40	dBV
Voltage gain	-4.5	dB, Pad: OFF
Input Impedance	>1900 Ω	at 1kHz
Output Impedance	<700 Ω	at 1kHz
Deviation from Linear Phase	≤ 30° ≤ 3° ≤ 30°	at 20Hz at 1KHz at 20kHz
Pad Attenuation	-20	dB

All measurments were done with 1.5kΩ load.
Specifications subject to change without notice.
Revision 0A (05/31/16)

