



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





DC-18 GHz

## Type N Coaxial Fixed Terminations

- Low VSWR
- Broadband
- Medium Power, Superior Performance  
40 W, 20 W, 10 W, 5 W and 1 W Models

### Specifications


Type N (M), DC to 18 GHz (Medium Power)

FREQUENCY RANGE (GHz)	MODEL	POWER**		VSWR* (max.)	WEIGHT	
		AVERAGE (W)	PEAK (kW)		oz.	gr.
DC-12.4	376BNM	40	7.5	1.10 + .025f	10	283
	378NM	1	1	1.04 + .003f	3	85
DC-18	370BNM	5	2	1.05 + .015f	3	85
	379BNM	5	2	1.05 + .010f	3	85
	377BNM	5	2	1.05 + .005f	3	85
	375BNM	10	5	1.05 + .015f	3	85
	374BNM	20	5	1.05 + .015f	5	142
2-18	367NM	40	5	1.07 + .005f	9	255


\* f denotes frequency in GHz.

\*\* **IMPORTANT NOTE:** Power rating is specified at 25° and free air convection at atmospheric (760 mm) pressure. Derate power capability linearly from stated value at 25°C to 0 watts at 135°C.


### Outline Drawings

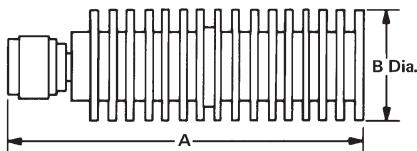

MODEL	A	B
367NM	7.57	1.75
374BNM	2.44	1.25
376BNM	5.06	1.63



MODEL	A	B
370BNM	1.67	.72
377BNM	1.67	.72
378NM	1.88	.72
379BNM	1.67	.72



MODEL 375BNM

Dimensions in inches, unless otherwise specified.

# Terminations

## Typical Performance Curves

