

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Trash receptacle with liner
Receptacle sold separately

Item No.	Size (in.) W x L	Gallon Size
37822	26" x 26"	10
37823	36" x 40"	36

Dimensional tolerances are $\pm 1/4$ " unless specified.
Packaged 50 per pack

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Protektive Pak Inc. letter on-line at ProtektivePak.com.

Unless otherwise noted, tolerance is $\pm 10\%$

Description

Protektive Pak Pink Poly Trash Receptacle Liners are made from light pink transparent low density polyethylene, and include an antistat that is integral to the film material. These liners have low charging (antistatic) properties, and since they are dissipative, electrostatic charges are removed to ground when a liner is grounded. The Liners are ideal for use in ESD protected areas, and are available in two sizes: 10 and 36 gallons. Protektive Pak Pink Poly Trash Receptacle Liners meet ANSI/ESD S20.20 and ANSI/ESD S541 requirements.

"It should be understood that any object, item, material or person could be a source of static electricity in the work environment. Removal of unnecessary nonconductors, replacing nonconductive materials with dissipative or conductive materials and grounding all conductors are the principle methods of controlling static electricity in the workplace, regardless of the activity." [ESD Handbook ESD TR20.20-2008 section 2.4 Sources of Static Electricity]

Specifications

Electrical Properties

Static Decay
Surface Resistance
Polycarbonate Haze
Corrosivity Observations

Typical Values

< 1.0 sec.
 1×10^4 to < 1×10^{11} ohms
NE
NE

Test Procedures/Method


ASTM 101 Method 4046
ANSI/ESD STM11.11
72 hr contact
MIL-STD-3010, M3005

Physical Properties

Thickness
Melt Index
Density
Dart Impact
Coefficient of Friction
1% Secant modulus (Stiffness)

2 mil (.002") nominal, $\pm 10\%$
0.050 gm/10 min
0.923 gm/cc
230 gms
MD 24,000 psi
MD 25,000 psi

ASTM D-1238
ASTM D-1505
ASTM D-1709
ASTM D-1894 (unmodified film)
ASTM D-882

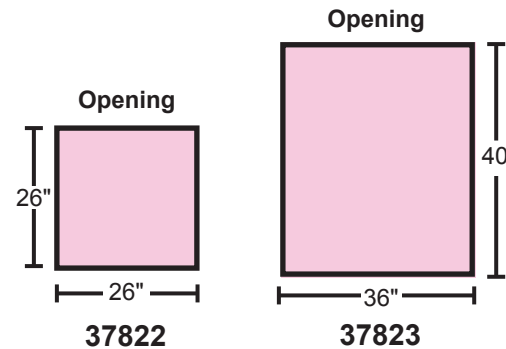

Made in the United States of America

Specifications and procedures subject to change without notice

TRASH RECEPTACLE LINER, PINK POLY

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578
ProtektivePak.com

DRAWING NUMBER
37822

DATE:
January
2016

PROTEKTIVE PAK