



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model 3786 Minigrabber® Test Clips To Double Banana Plug

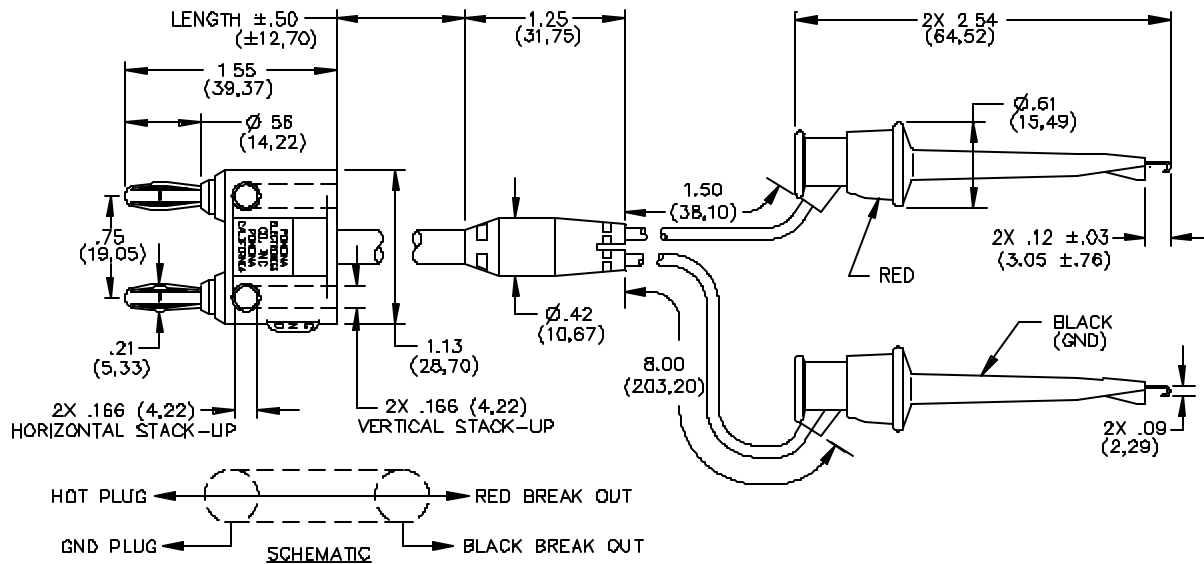

### FEATURES:

- Converts double Banana Jacks to Minigrabber Test Clip.
- Lengths other than those specified are available upon request.

### MATERIALS:

Conn: 1<sup>st</sup> End-Double Banana Plug

Material: Spring-Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT.

Plug Body: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to plug bodies and cable. Color matches color of cable.

Marking: "POMONA ELECTRONICS CO., INC. POMONA CALIFORNIA".

Cable: RG58C/U.

Marking: "POMONA 3786-C-XX".

Molded Breakout: PVC molded to breakout leads and cable. Color: Black Breakout Leads: 20 AWG, length.

41 x 36 T.C., PVC insulated, 2.21 (.087) O.D.

One Red Lead, one Black Lead

Conn: 2<sup>nd</sup> End-Minigrabber®

Material: Contact – Beryllium Copper per QQ-C-533, Alloy 165, ¼ HM.

Spring: stainless steel, Alloy 302.

Finish: Contact – Gold plated per MIL-G-45204, Type I, Class 00.

Insulation: Glass filled Nylon. Color: One Red and one Black.

Marking: "POMONA ELECTRONICS  
"MINIGRABBER®".

### RATINGS:

Operating Voltage: 300 VRMS/DC

Operating Temperature: +50°C. (+122°F.) Max

Current: 5 Amperes

**ORDERING INFORMATION:** Model 3786-C-XX  
XX=Cable Length, Standard Length: 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1524)

Ordering Example: Model 3786-C-60 indicates 60" in

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA