



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1 ϕ 3 ϕ 1000A AC Power Clamp Meter

Measures Current, Resistance, Temperature (Type K) and Power


Including True Power, Apparent Power, and Reactive Power

380976-K Features:

- Large dual LCD display (9999 count)
- Measures 1 ϕ /3 ϕ True Power (kW), Apparent Power (kVA), and Reactive Power (kVAR), plus Horsepower (HP), Power Factor, and Phase Angle with Lead/Lag indicator
- AC+DC μ A current with 10nA resolution for flame rod tests
- Max/Min recording with elapsed time indication
- Auto Detect AC/DC Voltage measurements with simultaneous frequency display
- Capacitance to 7000 μ F with 0.001 μ F resolution
- High Resistance tests to 100M Ω
- Type K, $^{\circ}$ C/ $^{\circ}$ F switchable, temperature to 1000 $^{\circ}$ F
- Diode and Continuity tests
- Auto power off with disable feature
- 1.6" (40mm) clamp jaw opening
- Test Lead Kit includes: two CAT IV-600V 72" (1.8m) lead extensions with right angle and straight end shrouded banana plugs; two modular test probe handles with stainless steel tips; two plunger activated retractable jaw clips; two extra large alligator clips
- Complete with test lead kit, general purpose Type K thermocouple probe, carrying case, and 9V battery

Applications:

- AC Power evaluation
- Motor/Generator installation and repair
- HVAC flame rod tests
- Capture max/min temperature or current values
- Category III rating for industrial measurements

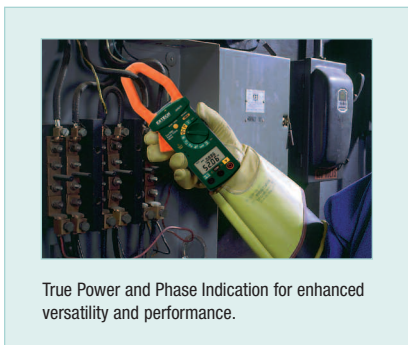

Function	Max Range / Resolution	Basic Accuracy
True Power (W):	600kW / 10W	$\pm 5\%$
Apparent Power(kVA):	600kVA / 100VA	$\pm 2\%$
Reactive Power (kVAR)	600kVAR/10VAR	$\pm 5\%$
Horsepower (HP)	800HP/0.01HP	$\pm 5\%$
Phase Angle (ϕ):	-60 to +60 $^{\circ}$ / 0.1 $^{\circ}$	$\pm 6^{\circ}$
AC Current: (Trms):	1000A / 10mA	$\pm 2\%$
μ A Current (AC+DC) (Trms):	1000 μ A / 10nA	$\pm 1\%$
AC/DC Voltage: (Trms):	600V / 0.1mV	$\pm 1\%$
Resistance (Ω):	1000k Ω / 0.1 Ω	$\pm 1\%$
Resistance (M Ω):	100M Ω / 1k Ω	$\pm 5\%$
Capacitance:	7000 μ F / 1nF	$\pm 1.5\%$
Frequency:	40Hz to 1kHz / 0.1Hz	$\pm 0.5\%$
Temperature (Type K):	-58 to 1000 $^{\circ}$ F / 0.1 $^{\circ}$ F -50 to 900 $^{\circ}$ C / 0.1 $^{\circ}$ C	$\pm 1\%$ $\pm 1\%$
Dimensions:	9 x 3 x 1.6" (228 x 76 x 39mm)	
Weight:	16.4oz (465g)	

Ordering Information:

380976-K.....3-Phase True RMS Power Clamp Meter Kit
 380976-K-NIST380976-K w/ Calibration Traceable to NIST Standards
 480172.....AC Line Splitter

