imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VICOR CONFIDENTIAL THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF VICOR CORP.

F

Е

D

С

В

А


R.060 [1.52]— (4) PL. 1.913±.010 -[48.60±.25]-R.063 --[1.59] (6) PL. <> .386 [9.81] <> 1.467 [37.26] <> 3.706±.010 [94.14±.25] 2.934 [74.52] <> <> .125±.003 [3.18±.08] (6) PL. <> 1.754 —[44.55]— <>

7

NOTES:


- 1- MATL: ALUMINUM 6063-T5.
- 2- CORNERS SHOWN SHARP TO BE .005/[.13] MAX.
- <> 3- CLEAR FINISH, ROHS COMPLIANT PER CST-0001, LATEST REVISION PER A.) CHROMIUM FREE, OR B.) TRIVALENT CHROMIUM IN ACCORDANCE WITH MIL-DTL-5541, TYPE II, CLASS 1A OR 3. SEE CST-0003 FOR TYPES OF AVAILABLE FINISHES.
 - 4- ALL DIMENSIONS APPLY AFTER PLATING.
 - 5- <> DENOTES CRITICAL CHARACTERISTIC FOR LOT INSPECTION.
 - 6- MAXIMUM STEP BETWEEN ADJOINING CUTTER PASSES TO BE .0005/[.013]
- 7- BASE PLATE SURFACE PREPARATION PRIOR TO CLEAR FINISH IN ACCORDANCE WITH WS-0016.
- 8- REMOVE ALL BURRS AND SHARPE EDGES.

7

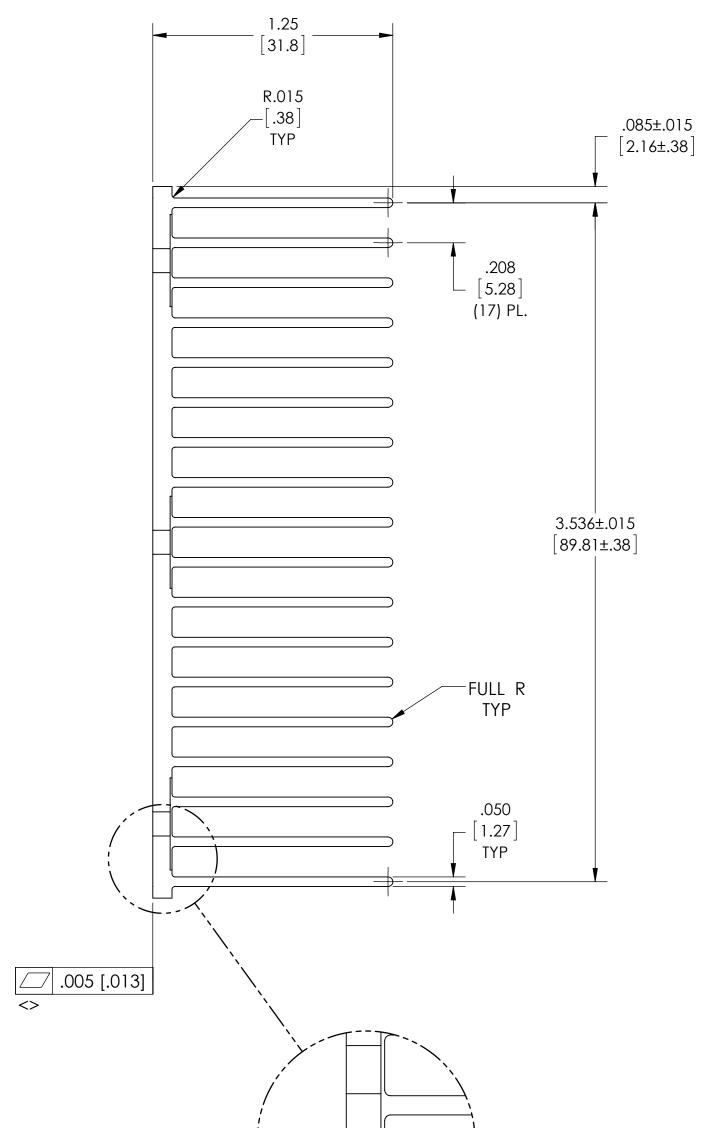

5

6

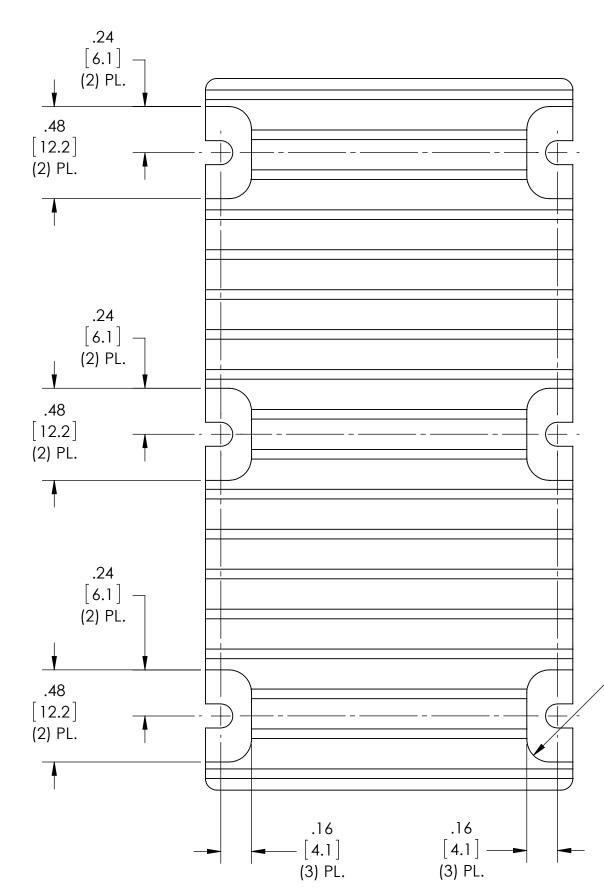

3

4

.100 [2.54]

5

4

3


2				1	
REV.	DESCRI	PTION		DATE	APPROVED
1	REVISED PER E12094	3	GCK	10/22/12	REJH
2	REVISED PER E13014	3	GCK	02/01/13	REJH

С

Е

D

В

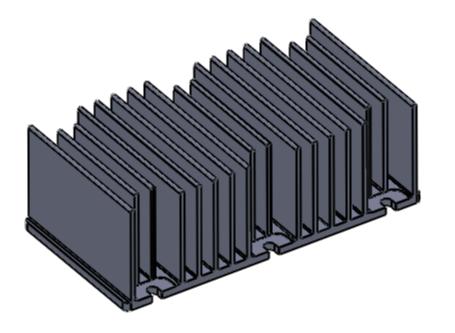

DRAWN BY	DATE	∧∧∧₀ <i>VICOR</i> sw						
R.E.J.Hickey	R.E.J.Hickey 02/09/11							
UNLESS OTHERW DIMENSIONS ARE TOLERANCES A DECIMALS X.XX [X.X] = ±0.01 [0 X.XXX [X.XX] = ±0.00	HE	A <i>tsini</i>	K	VIBrick X-FLOW	/ 1.25			
THIRD ANGLE P	ROJECTION	SIZE	CAGE COD	DE	DWG NO	REV		
		D	67131	l	38146	2		
DO NOT SCALE DRAWING		SCALE 2:1		SHEET 1 OF 1				