



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



3M™ Pak 50 Stacking Compression Connector

130 Position

388 Series



- No solder joints, compression stacking connector
- Standardized interface for Intel Modular Interface eXtension (MIX) Bus (module to module and module to baseboard connector)
- Connector heights tailored for Multibus II environment
- 130 contacts to fully accommodate “MIX” bus signals
- RoHS* compliant

Date Modified: February 9, 2005

TS-0421-15
Sheet 1 of 5

Physical

Insulation

Material: Glass Filled Polyester (PPS)
Flammability: UL 94V-0
Color: Black

Marking: 3M Logo & Ink Stamped Part Number

Stiffener

Material: Spring Steel
Coating: Black Epoxy

Contact

Material: Beryllium Copper

Plating

Underplating: 50 μ" (1.27 μm) Nickel - QQ-N-290, Class 2
Wiping Area: 30 μ" (0.76 μm) Gold - MIL-G-45204, Type II, Grade C

Electrical

Current Rating: 1 A

Insulation Resistance: $> 1 \times 10^9 \Omega$ at 500 VDC

Withstanding Voltage: 30 V

Environmental

Temperature Rating: -55°C to +105°C


UL File No.: E68080

*RoHS = Directive 2002/95/EC,
Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment

3M™ Pak 50 Stacking Compression Connector

130 Position

388 Series

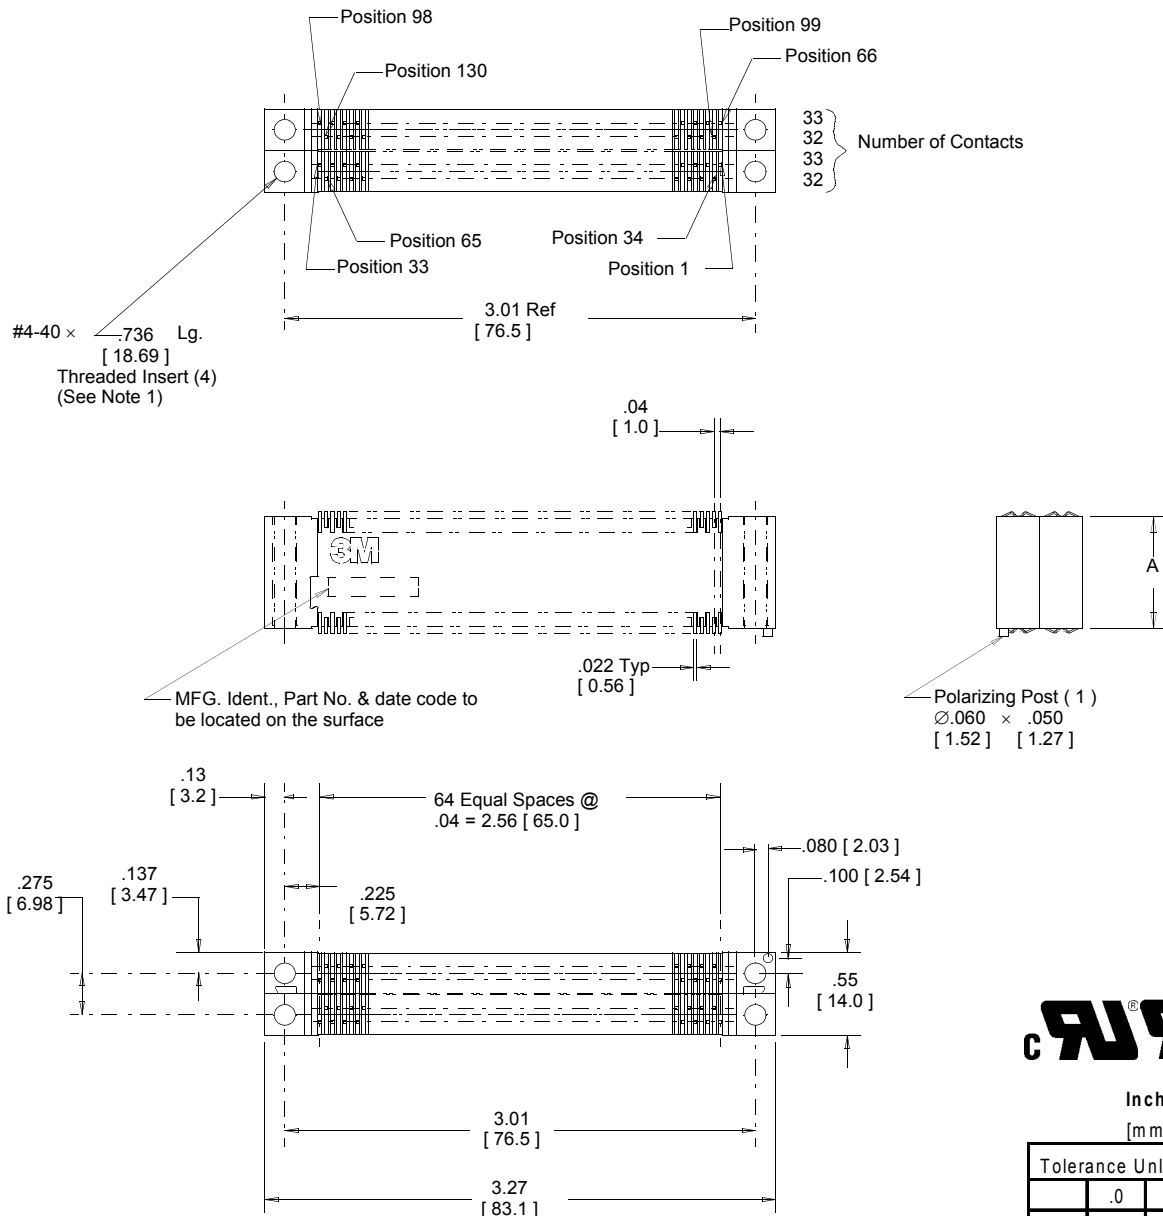

Inch [mm]

Tolerance Unless Noted			
	.0	.00	.000
inch	±.1	±.01	±.005

[] Dimensions for Reference Only

Note:

- Each connector includes (8) screws, 3M #3342-8 and (2) stiffeners, 3M #3448-38.

Ordering Information

388X-100A


Board spacing (Dimension A)
 2 = .476 [12.09]
 7 = .738 [18.75]

TS-0421-15
 Sheet 2 of 5

3M™ Pak 50 Stacking Compression Connector

130 Position

388 Series

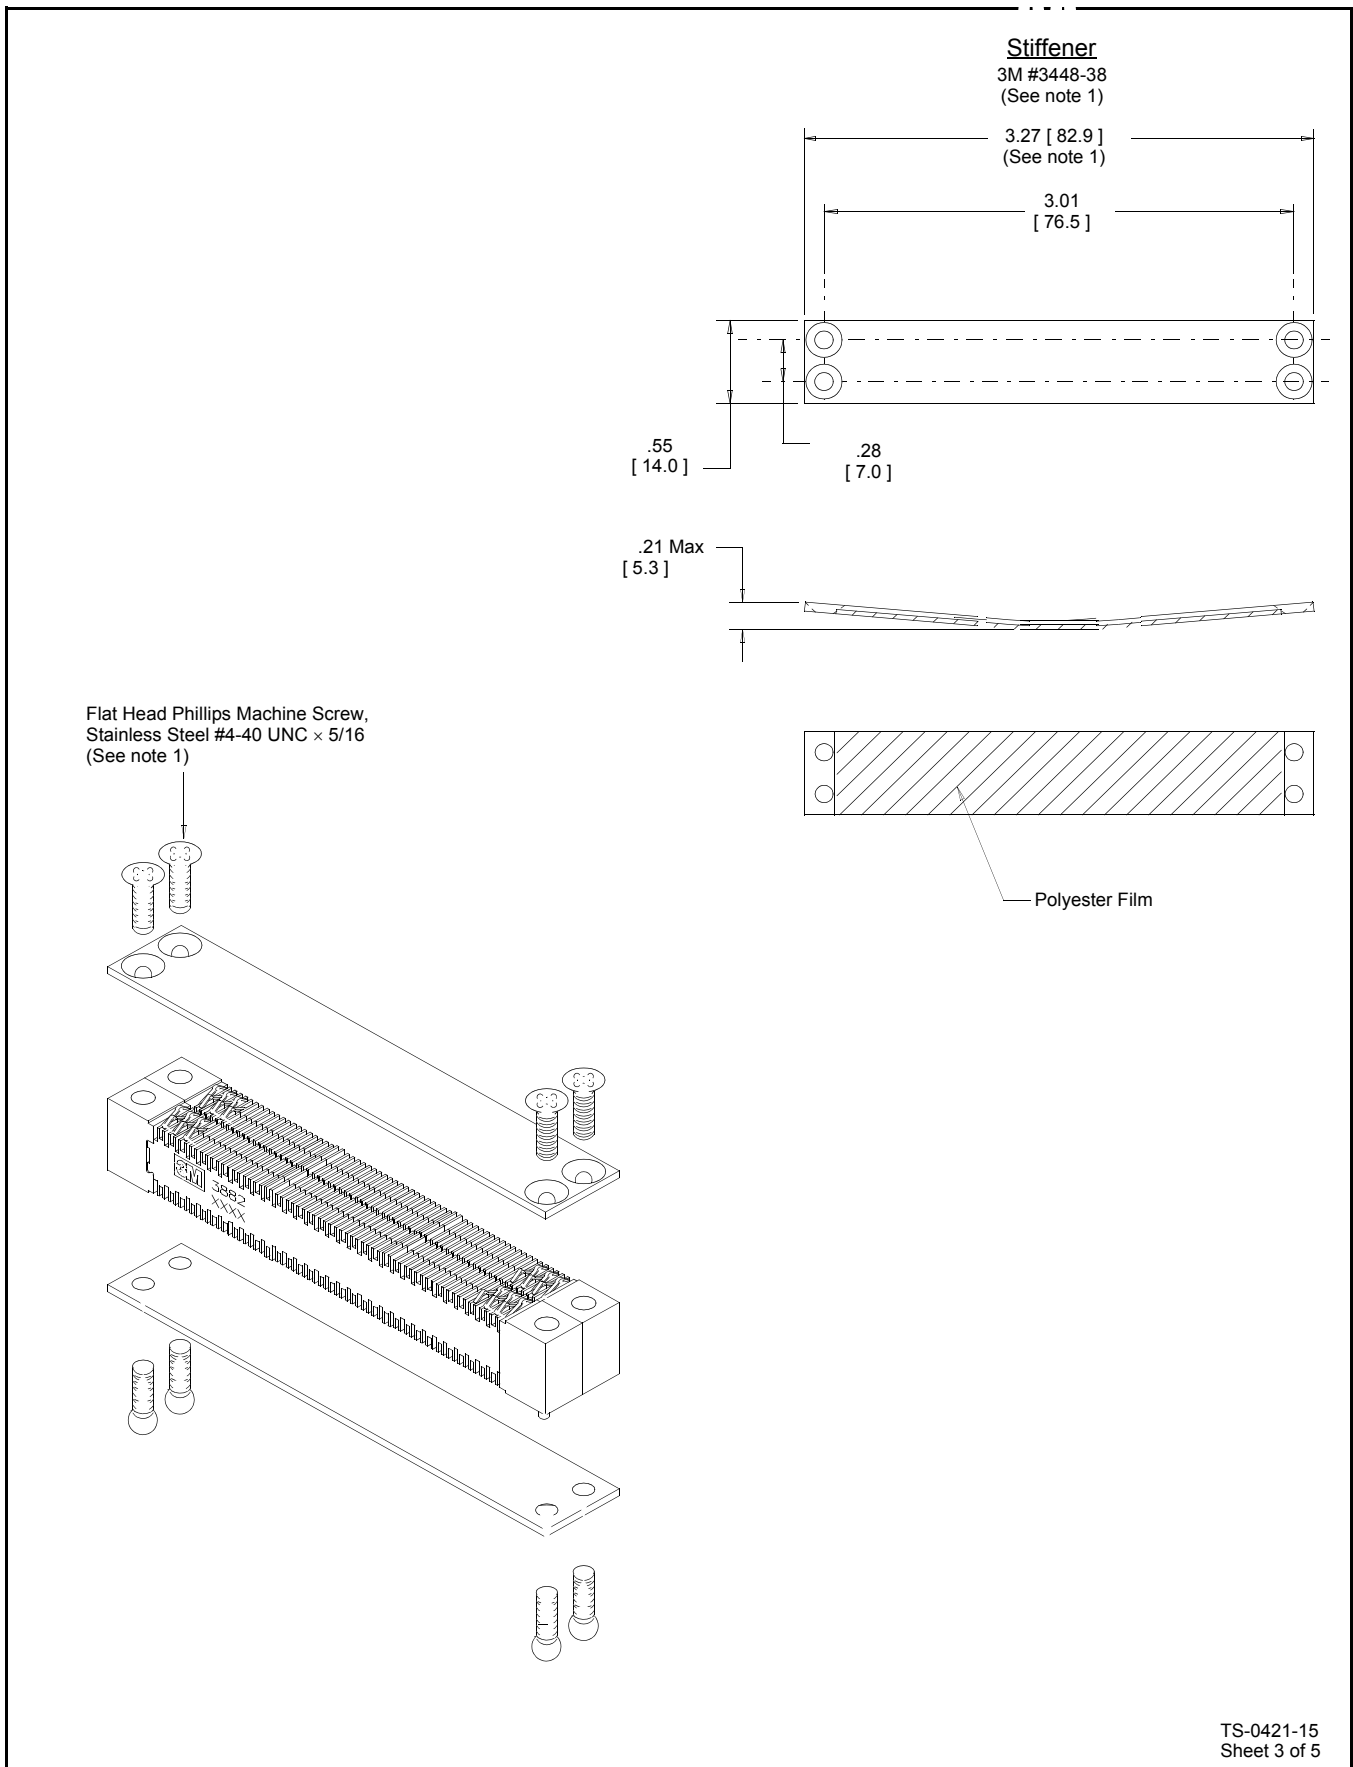

TS-0421-15
Sheet 3 of 5

3M™ Pak 50 Stacking Compression Connector

130 Position

388 Series

Board and Footprint Specification

Board

Material: G10 Glass Filled Epoxy

Thickness: .062" ± .0008"

Pad

Material: 1.0 ounce Copper



Size: .055" x .090" Oval

Thickness: .0012" minimum


Underplating: 100 μ" (2.54 μm) Nickel - QQ-N-290

Plating: 30 μ" (0.76 μm) Gold - MIL-G-45204, Type II, Grade C,
130-220 Knoop hardness

MIX Connector Footprint pad and hole locations Primary and Secondary Sides (Viewed from primary side)

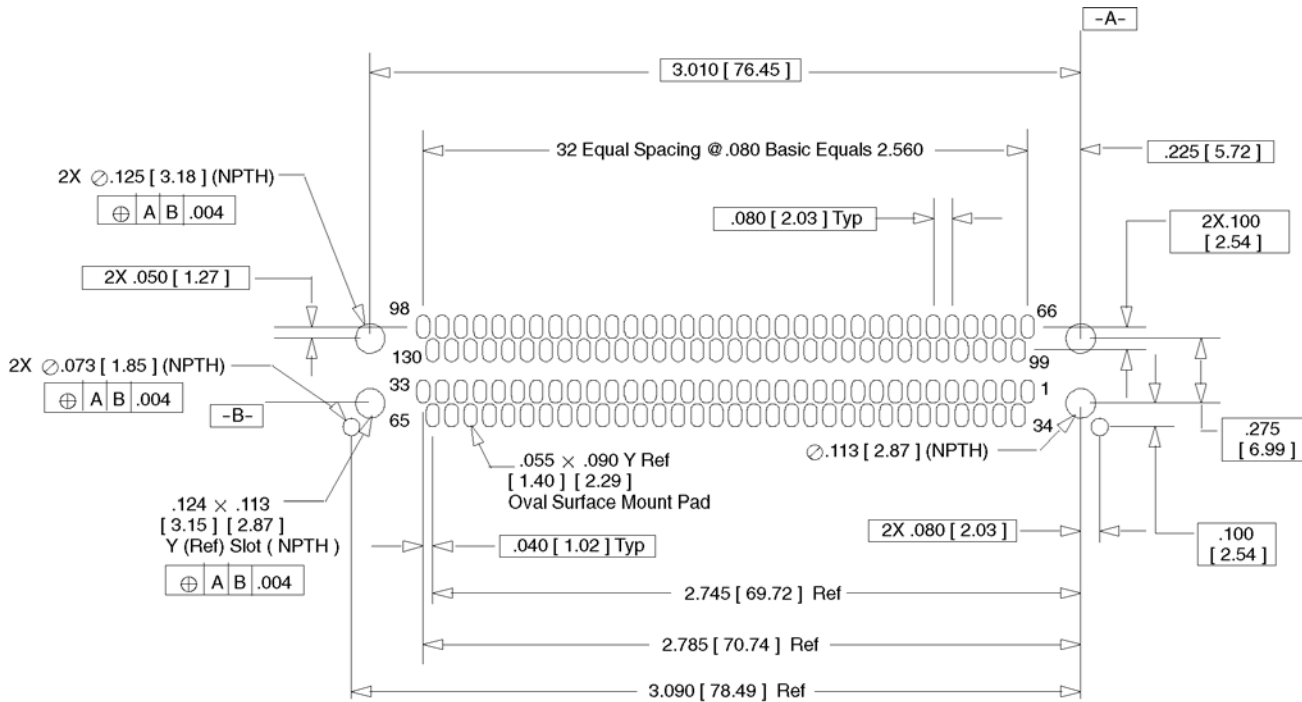

**Oval SMT Pad
Detail**



**Slot Detail
(NPTH)**


TS-0421-15
Sheet 4 of 5

3M™ Pak 50 Stacking Compression Connector


130 Position

388 Series

MIX Connector Footprint
Via Locations
Primary and Secondary
Sides
 (Viewed from primary side)

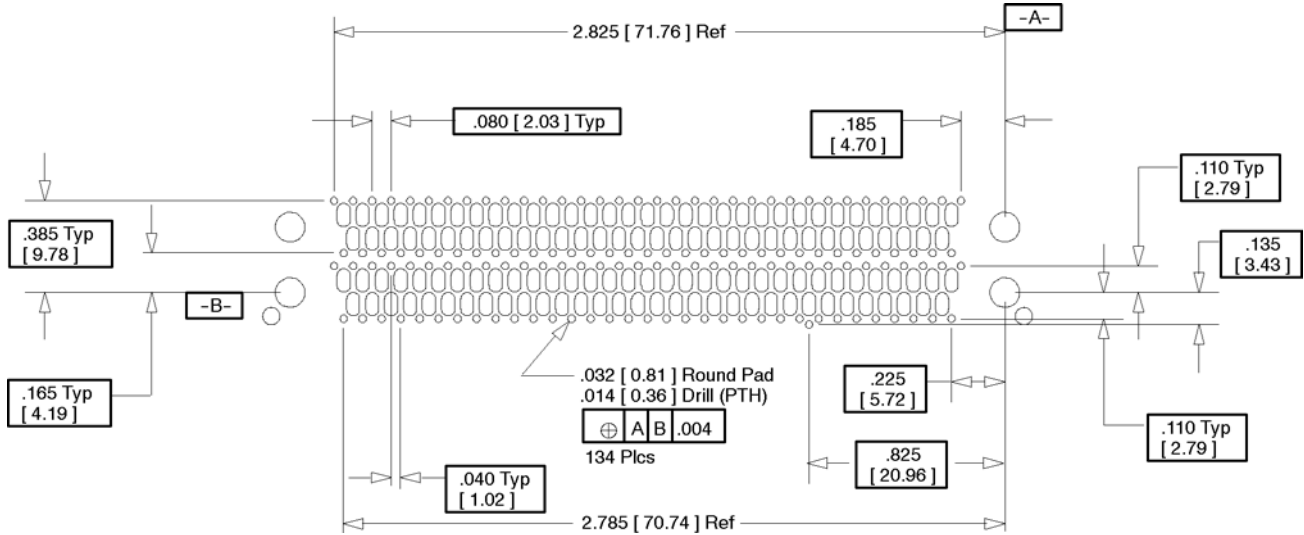

MIX Connector Footprint
Gold and Non-Gold Zones

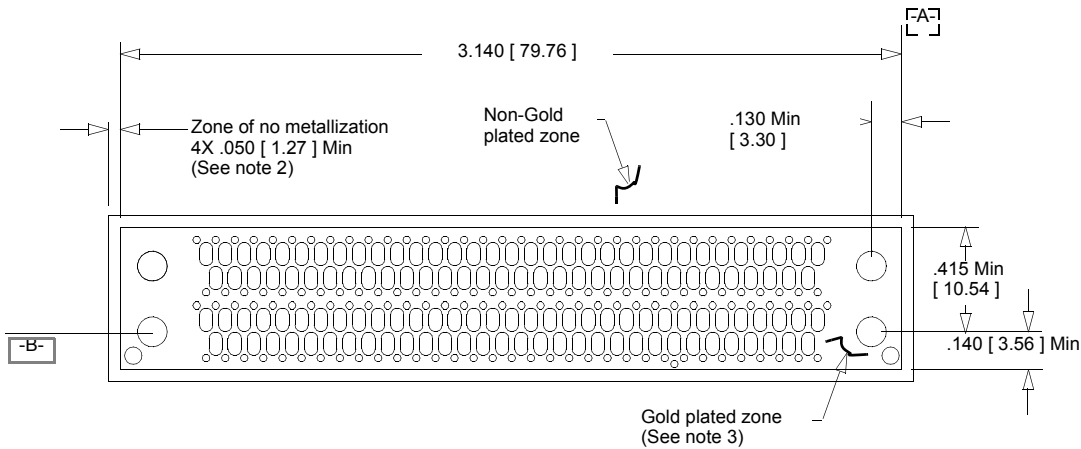

Notes:

2. Zone of no metallization is to be clear of any copper on the primary and secondary sides.
3. Gold plated zone is to be clear of any vias other than the established via pattern.

TS-0421-15
 Sheet 5 of 5

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 1 year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

3M

Electronic Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000
www.3M.com/esd



Minimum 10%
Post-consumer Fiber

Printed in USA.

© 3M 2005