



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



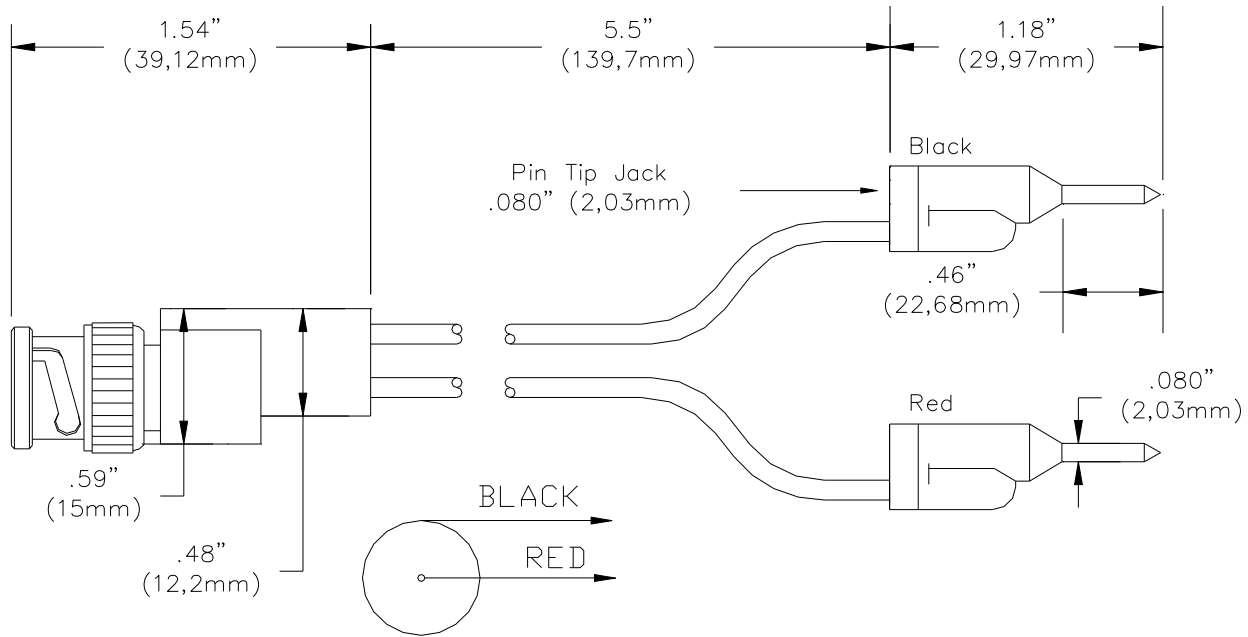

SCHEMATIC

FEATURES:

- ✓ Converts BNC (female) cables / connectors to stackable pin tip for test versatility.
- ✓ Miniature banana plug springs are gold plated Beryllium Copper for excellent electrical connection.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.
- ✓ Pin tip plugs are stackable.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Brass

Dielectric: PTFE

Wire: 20 AWG, PVC Insulated

Pin Tip: Brass Gold Plated, Spring: Beryllium Copper, Gold Plated

Insulation: Polypropylene, color matches color of wire.

RATINGS:

Voltage: Hands free testing in controlled voltage environments: 500 Vrms Max. *For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +131°F (+55°C) Max.

ORDERING INFORMATION: Model 3901*

* Custom lengths are available, contact Pomona Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)

For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com