



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





FEATURES

- RoHS compliant
- Compact size
- Surface mount
- UL94 V-0 package materials
- Pick & place compatible
- J-STD-020D reflow
- Backward compatible with Sn/Pb soldering systems

DESCRIPTION

The 3900 series is a range of surface mount, flat coil wound power inductors that is designed for use where high current and low loss is essential, such as laptop computers and plasma screens.

SELECTION GUIDE

Order Code	Inductance (100kHz, 0.1V _{AC})	DC Current ¹	Saturation Current ²	DC Resistance	
	±20% μH	Max. A	Typ. A	Max. mΩ	
Standard Type	39S681C	0.68 ±30%	19.5	20.4	1.9
	39S152C	1.50 ±30%	13.5	14.0	2.5
	39S252C	2.50	10.0	10.0	3.9
	39S402C	4.00	8.3	8.3	5.4
	39S602C	6.00	6.7	6.7	8.0
	39S822C	8.20	5.8	5.8	11.4
	39S103C	10.0	5.0	5.0	13.5
High Power Type	39H471C	0.47 ±30%	19.5	28.8	1.9
	39H102C	1.00	17.5	20.0	2.5
	39H182C	1.80	13.5	15.3	3.9
	39H282C	2.80	11.0	12.3	5.4
	39H402C	4.00	9.7	10.3	8.0
	39H562C	5.60	8.2	8.8	11.4
	39H722C	7.20	6.6	7.8	13.5
Ultra Power Type	39U351C	0.35 ±30%	19.5	35.0	1.9
	39U801C	0.80 ±30%	18.0	25.7	2.5
	39U142C	1.40	13.5	19.2	3.9
	39U222C	2.20	11.0	14.8	5.4
	39U322C	3.20	9.7	12.8	8.0
	39U432C	4.30	8.2	11	11.4
39U562C	5.60	6.6	9.5	13.5	

ABSOLUTE MAXIMUM RATINGS

Operating temperature range	-40°C to +125°C
Storage temperature range	-40°C to +150°C

SOLDERING INFORMATION³

Peak reflow temperature	245°C
Pin finish	Matte tin
Moisture sensitivity level	1

PACKAGING INFORMATION

Tape & Reel	550 per reel
-------------	--------------


All specifications typical at T_A=25°C

- 1 The maximum DC Current is the value at which the inductance falls to 65% (tolerance ±30%) or 75% (tolerance: ±20%) of its nominal value or until its temperature rise reaches 40°C, whichever is sooner.
- 2 The saturation current is the continuous current at 20°C ambient at which the inductance falls to 65% (tolerance: ±30%) or 75% (tolerance: ±20%) of its nominal value.
- 3 For further information, please visit www.murata-ps.com/rohs
- 4 Terminal 3 is open-circuit and for mounting stability only.




For full details go to
www.murata-ps.com/rohs


INDUCTANCE Vs CURRENT (STANDARD TYPE)

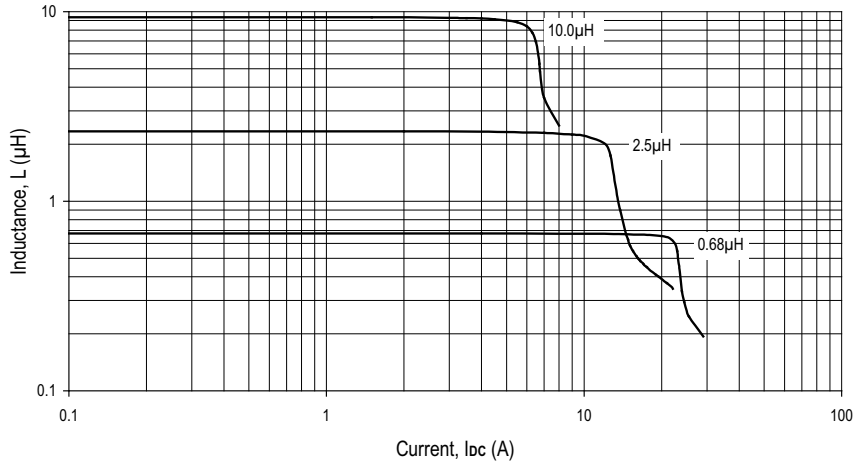


INDUCTANCE Vs CURRENT (HIGH POWER TYPE)

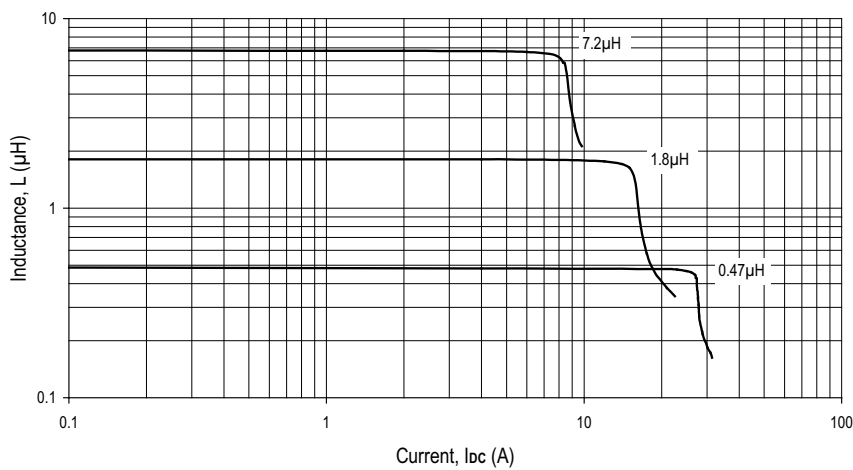


INDUCTANCE Vs CURRENT (ULTRA HIGH POWER TYPE)

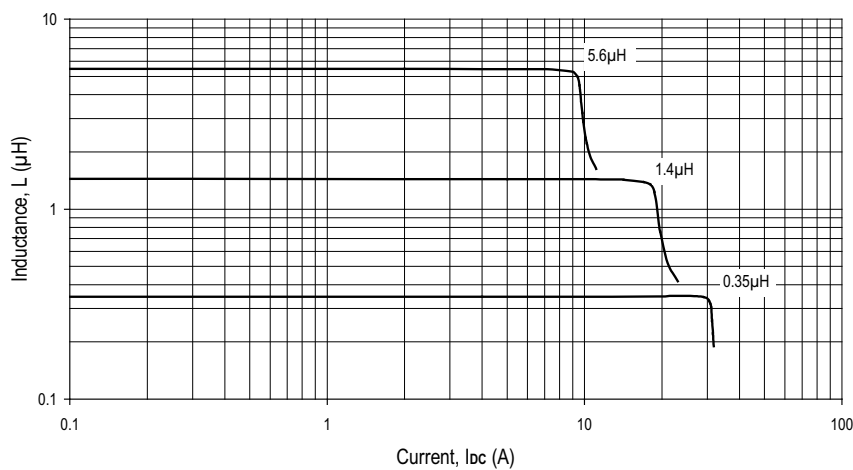


TEMPERATURE Vs CURRENT (STANDARD TYPE)

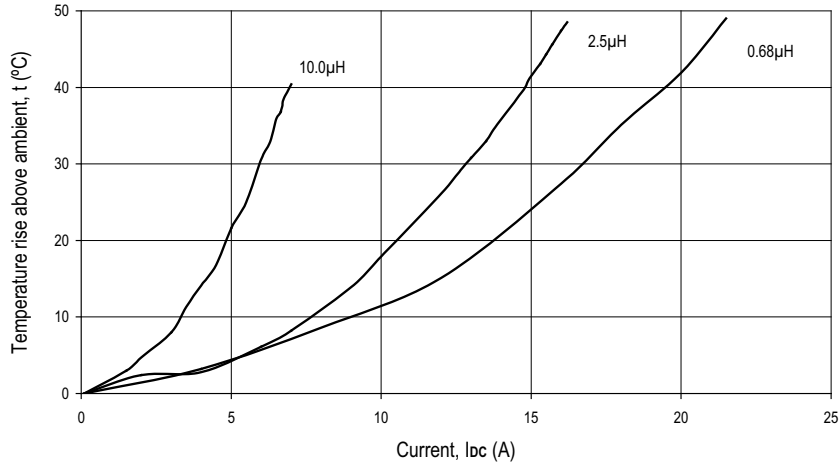

TEMPERATURE Vs CURRENT (HIGH POWER TYPE)

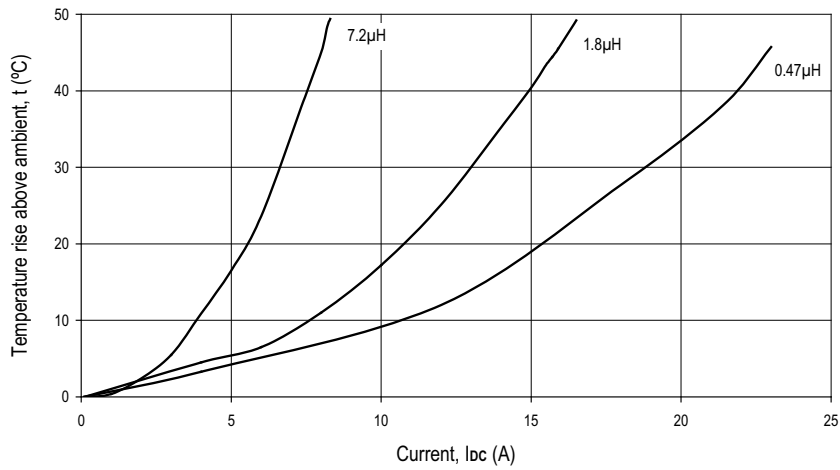


(ULTRA HIGH POWER TYPE)

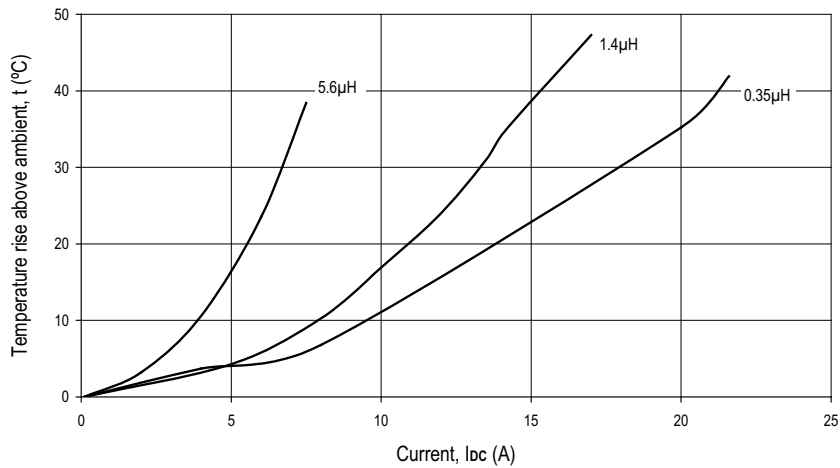


PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS⁴

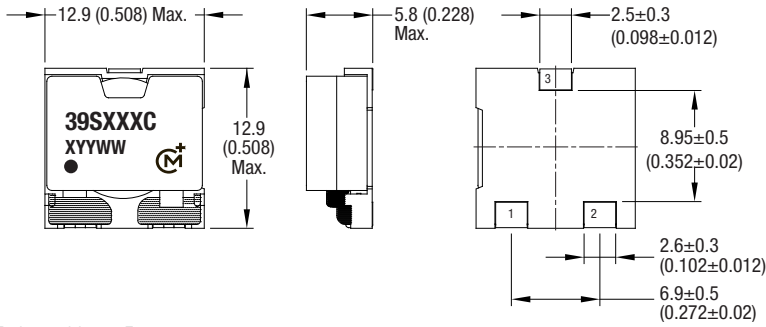

Package weight: 2.7g Typ.


RECOMMENDED FOOTPRINT DETAILS

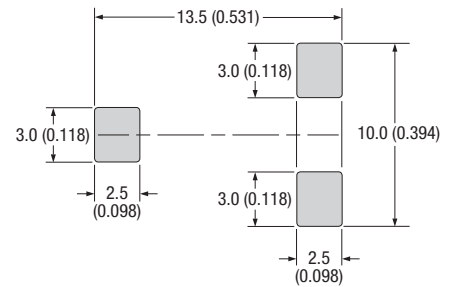

All dimensions in mm (inches).

TAPE & REEL SPECIFICATIONS

TAPE OUTLINE DIMENSIONS

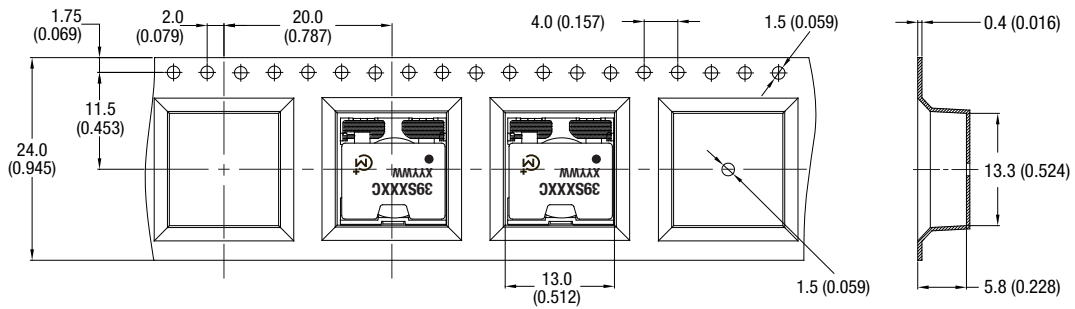

Reel quantity: 550
Unless otherwise stated, all dimensions in mm (inches).