



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	01/15/09	T. Y.
B	Added R/Y & A/G LED Specs	05/06/10	T. Y.
C	Added LED Specs	02/10/15	J. C.

$\varnothing.122$ [$\varnothing 3.1\text{mm}$]
 N-Flange Dia.
 $\varnothing.118$ [$\varnothing 3.0\text{mm}$]
 Shouldered Lead
 "3BCC-XX" LED

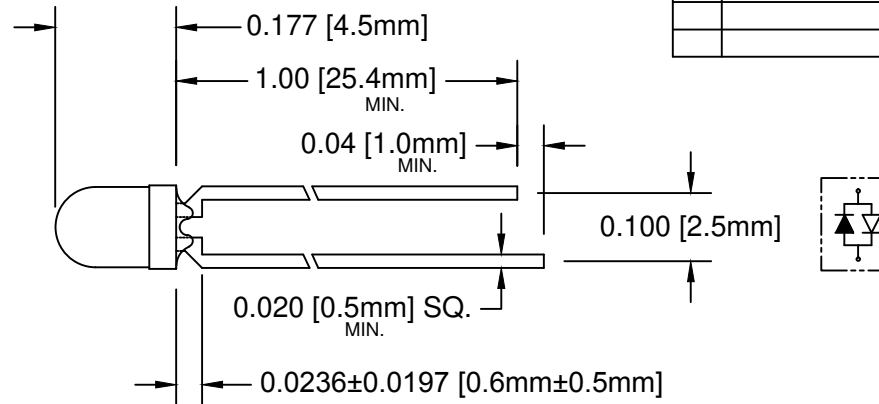

Recommended Mounting
 Hole Size = $\varnothing.032^{+.003}_{-.002}$


Flat Edge ID
 $\varnothing.150$ [$\varnothing 3.8\text{mm}$]
 Flange Dia.
 $\varnothing.118$ [$\varnothing 3.0\text{mm}$]
 Flanged "3BCC-XX-F" LED

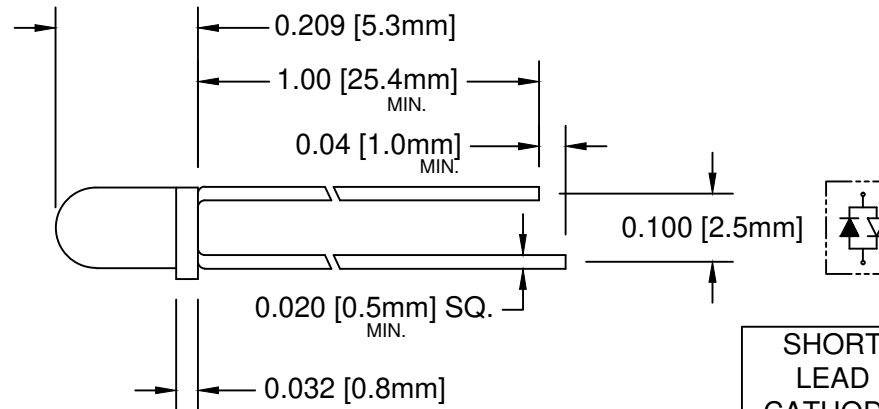

SHORT LEAD CATHODE	PART NO.	LONG LEAD CATHODE
RED	3BCC-X	GREEN
YELLOW	3BCC-Y/G-X	GREEN
RED	3BCC-R/Y-X	YELLOW
AMBER	3BCC-A/G-X	GREEN



ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

REVERSE VOLTAGE _____ 5V
 REVERSE CURRENT _____ 100uA
 OPERATING TEMPERATURE RANGE _____ -25°C - 85°C
 STORAGE TEMPERATURE _____ -30°C - 100°C
 LEAD SOLDERING TEMPERATURE(1/16" FROM BODY) _____ 260°C FOR 5 SECONDS

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR® 4 THOMAS, IRVINE, CA 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
<u>DECIMALS</u>	<u>ANGULAR</u>		
.X ± .1	X° ± 1°	 TITLE: T1 (3mm) BI-COLOR LED	
.XX ± .02			
.XXX ± .010		PART NO: 3BCC-XX-X	
DESIGNED: Raffy Paje	DATE: 01/15/09	REVISION: C	
CHECKED: F. Jensen	DATE: 01/15/09	CAGE CODE : 32559	SHEET # 1 OF 2
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			

	SEE SHEET #1		

LED Part No.	Chip			Lens Appearance	Absolute Max. Ratings				Electro-Optical Data @ 20mA			Viewing Angle 2 Θ ½ (Deg)
	Material	Peak Wave Length λ p(nm)	Emitted Color		Δλ (nm)	Pd (mW)	If (mA)	Peak If(mA)	Vf (V)		Iv (mcd)	
									Typ.	Max.	Typ.	
3BCC	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	10	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	10	40
3BCC-F	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	8	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40
3BCC-Y/G	GaAsP/GaP	590	YELLOW	WATER CLEAR	35	80	30	150	2.0	2.8	4	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	6	40
3BCC-Y/G-F	GaAsP/GaP	590	YELLOW	WATER CLEAR	35	80	30	150	2.0	2.8	6	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40
3BCC-R/Y	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	8	40
	GaP/GaP	590	YELLOW		30	80	30	150	2.0	2.8	6	40
3BCC-R/Y-F	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	8	40
	GaP/GaP	590	YELLOW		30	80	30	150	2.0	2.8	6	40
3BCC-A/G	GaAsP/GaP	605	AMBER	WATER CLEAR	35	80	30	150	2.0	2.8	6	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40
3BCC-A/G-F	GaAsP/GaP	605	AMBER	WATER CLEAR	35	80	30	150	2.0	2.8	6	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) DECIMALS ANGULAR		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
			TITLE: T1 (3mm) BI-COLOR LED
DESIGNED: Raffy Paje	DATE: 01/15/09	PART NO: 3BCC-XX-X	REVISION: C
CHECKED: F. Jensen	DATE: 01/15/09	CAGE CODE : 32559	SHEET # 2 OF 2
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			