



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Double Pole, Electrically Held, 2 Amps and Less (Continued)

**.150 Grid-space Relays**  
**Type 3SBC (2PDT) Standard**  
**135 mW 2PDT**  
**50 mW (Form AB)**  
**1 PNC-1 PNO**



**Product Facts**

- Low profile... only 0.32 inches high
- Internal diode for coil transient suppression and transistor driven models available
- Qualified to MIL-R-39016/13
- RF designs available

The .150 Grid-space relay — only 0.32 inches high — saves space in electronic packaging. The pin spacing allows you to insert the relay with no intermediate pin spreaders as well as meet applicable military specifications.

**Electrical Characteristics**

**Contact Ratings —**  
 DC resistive — 2 amps at 28 volts (50,000 operations)  
 1 Amp @ 28 V (100,000 operations)  
 DC inductive — 0.5 amps at 28 volts, 200 mH  
 AC resistive — 0.5 amps at 115 volts  
 AC — 0.125 amps at 115 volts (case grounded)  
 Low-level — 50 µA at 50 mV  
 Peak AC or DC

**Contact Resistance —**  
 0.050 ohms max.; 0.150 ohms after life test

**Life —** 100,000 operations at rated loads listed; 1,000,000 operations at low-level loads

**Operating Characteristics**

**Operate Time —** 4 ms max.  
**Release Time —** 4 ms max.  
**Contact Bounce —** 1.5 ms  
**Dielectric Strength —**  
 500 volts rms at sea level;  
 350 volts rms at 70,000 feet and above  
**Insulation Resistance —** 1,000 megohm min. over temperature range

**Environmental Characteristics**

**Vibration —** 30G, to 3000 Hz  
**Shock —** 100 G at 11 ms  
**Temperature —** -65°C to +125°C

See page 1-44 for Mounting Forms, Terminals and Circuit Diagrams.

**Coil Table Type 3SBC (All Values DC)\*2PDT, 135 mW Sensitivity: (Code 1)**

Coil Code Letter	Coil Resistance @ 25C (ohms)	Voltage Calibrated, Code 5				Current Calibrated, Code 6			
		Suggested Source Volts†	Max. Operate Volts @ 25C	Release Voltage Range @ 25C		Max. Continuous Current @ 125C (mA)	Max. Operate Current @ 25C (mA)	Release Current Range @ 25C (mA)	
				Max.	Min.			Max.	Min.
A	44 ± 10%	3.5-6.2	2.4	1.45	0.26	87.0	54.5	32.7	6.00
B	56 ± 10%	4.0-7.0	2.7	1.6	0.3	77.0	48.3	28.6	5.30
D	140 ± 10%	6.4-12.0	4.4	2.6	0.5	50.3	31.4	18.5	3.60
E	210 ± 10%	8.0-16.0	5.4	3.2	0.6	40.0	25.7	15.4	2.80
L	650 ± 10%	13.6-24.0	9.5	5.6	1.0	22.9	14.3	8.6	1.54
K	1350 ± 10%	20.0-35.0	13.5	8.1	1.5	15.5	10.0	6.0	1.10
N	2245 ± 10%	26.0-46.0	17.1	10.5	1.9	12.0	7.6	4.7	0.84

**Coil-Data (All Values DC)\* Type 3SBC Form AB 50 mW Sensitivity non mil spec: (Code 2)**

Coil Code Letter	Coil Resistance @ 25C (ohms)	Voltage Calibrated, Code 5				Current Calibrated, Code 6			
		Suggested Source Volts†	Max. Operate Volts @ 25C	Release Voltage Range @ 25C		Max. Continuous Current @ 125C (mA)	Max. Operate Current @ 25C (mA)	Release Current Range @ 25C (mA)	
				Max.	Min.			Max.	Min.
B	56 ± 10%	2.6-7.0	1.8	1.1	0.16	46.5	29.1	18.2	3.30
C	85 ± 10%	3.3-9.5	2.3	1.4	0.20	38.7	24.2	15.1	2.70
D	140 ± 10%	4.3-12.0	2.9	1.8	0.27	30.4	19.0	11.9	2.10
E	210 ± 10%	5.3-14.0	3.6	2.2	0.33	24.8	15.5	9.7	1.75
F	360 ± 10%	6.7-19.0	4.5	2.8	0.41	18.9	11.8	7.2	1.30
G	510 ± 10%	8.2-23.0	5.6	3.5	0.51	15.8	9.9	6.2	1.10
H	775 ± 10%	10.0-26.0	6.8	4.2	0.62	12.8	8.0	5.0	0.90
K	1350 ± 10%	13.2-35.0	9.0	5.6	0.82	9.8	6.1	3.8	0.68
N	2245 ± 10%	16.8-46.0	11.4	7.1	1.00	7.4	4.6	2.9	0.52

\*Values listed are factory test and inspection data. User should allow for meter variations.

†At nominal resistance plus 10%.


‡Applicable over the operating temperature range in circulating air.

See Page 1-42 for ordering instructions.

\* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

**Double Pole, Electrically Held, 2 Amps and Less** (Continued)

**.150 Grid-space Hybrid Relays**  
**Single Diode, Dual Diode**  
**Type 3SBC (2PDT)**  
**135 mW**



**Product Facts**

- Low profile... only 0.32 inches high
- 50 milliwatt forms available
- Qualified to MIL-R-39016/37
- Qualified to MIL-R-39016/38
- RF designs available

The hybrid .150 Grid-space relay — only 0.32 inches high — saves space in electronic packaging. The pin spacing allows you to insert the relay with no intermediate pin spreader.

**Electrical Characteristics**

**Contact Ratings** —  
 DC resistive — 2 amps at 28 volts (50,000 operations)  
 1 Amp @ 28 V (100,000 operations)  
 DC inductive — 0.5 amps at 28 volts, 200 mH  
 AC resistive — 0.5 amps at 115 volts  
 AC — 0.125 amps at 115 volts (case grounded)  
 Low-level — 50 µA at 50 mV  
 Peak AC or DC

**Contact Resistance** —  
 0.050 ohms max.; 0.150 ohms after life test

**Life** — 100,000 operations at rated loads listed; 1,000,000 operations at low-level loads

**Operating Characteristics**

**Operate Time** — 4 ms max.  
**Release Time** — 6 ms max.  
**Contact Bounce** — 1.5 ms  
**Dielectric Strength (Note 1)** —  
 500 volts rms at sea level;  
 350 volts rms at 70,000 feet and above  
**Insulation Resistance (Note 1)** —  
 1,000 megohm min. over temperature range

**Environmental Characteristics**

**Vibration** — 30G, to 3000 Hz  
**Shock** — 100 G at 11 ms  
**Temperature** — -65°C to +125°C

**Semiconductor Characteristics at 25°C**

**Diode** —  
 Max. Negative Transient — 1.0 volt  
 Breakdown Voltage — 100 VDC @ 10 µA  
 Max. Leakage Current — 1 µA @ 50 VDC

See page 1-44 for Mounting Forms, Terminals and Circuit Diagrams.

**Coil Table Single Diode (All Values DC)\*(2DPT), 135 mW Sensitivity: (Code 5)**

Coil Code Letter	Coil Resistance (@ 25C (ohms))	Voltage Calibrated, Code 5				Current Calibrated, Code 6			
		Suggested Source Volts†	Max. Operate Volts (@ 25C)	Release Voltage Range (@ 25C)		Max. Continuous Current (@ 125C (mA))	Max. Operate Current (@ 25C (mA))	Release Current Range (@ 25C (mA))	
				Max.	Min.			Max.	Min.
A	44 ± 10%	3.5- 6.2	2.4	1.45	0.26	87.0	54.5	32.7	6.00
B	56 ± 10%	4.0- 7.0	2.7	1.6	0.3	77.0	48.3	28.6	5.30
D	140 ± 10%	6.4-12.0	4.4	2.6	0.5	50.3	31.4	18.5	3.60
E	210 ± 10%	8.0-16.0	5.4	3.2	0.6	40.0	25.7	15.4	2.80
L	650 ± 10%	13.6-24.0	9.5	5.6	1.0	22.9	14.3	8.6	1.54
K	1350 ± 10%	20.0-35.0	13.5	8.1	1.5	15.5	10.0	6.0	1.10
N	2245 ± 10%	26.0-46.0	17.1	10.5	1.9	12.0	7.6	4.7	0.84


**Coil Table Dual Diode (All Values DC)\*(2DPT), 135 mW Sensitivity: (Code 6)**

Coil Code Letter	Coil Resistance (@ 25C (ohms))	Suggested Source Volts†	Max. Operate Volts (@ 25C)	Release Voltage Range (@ 25C)	Max. Continuous Current (@ 125C (mA))	Max. Operate Current (@ 25C (mA))	Release Current Range (@ 25C (mA))
A	44 ± 10%	3.9- 7.0	3.4	2.0	0.37	98.2	77.3
B	56 ± 10%	4.6- 8.0	3.7	2.2	0.41	89.8	66.1
D	140 ± 10%	7.8-12.0	5.4	3.2	0.6	52.4	38.6
E	210 ± 10%	9.3-16.0	6.4	3.8	0.7	41.4	30.5
L	650 ± 10%	15.0-24.0	10.5	6.2	1.1	23.6	16.2
K	1350 ± 10%	21.0-35.0	14.5	8.7	1.6	16.0	10.7
N	2245 ± 10%	27.0-46.0	18.1	10.9	2.0	12.1	8.1

**Ordering Instructions**

**Example:** The relay selected in the example is a FORM AB .150-grid relay, current calibrated, end bracket mounting with 0.13-inch solder hook header, 210 ohms coil resistance, and 50 mW sensitivity. By choosing the proper code for each of these relay characteristics, the catalog number is 3SBC6131E2. The letter R following sensitivity code indicates relay received 5000 operation miss-test. Ex. 3SBC6131E2R.

**Note:** Relays specified by catalog numbers (per above directions) are general use items controlled by catalog specifications. Relays to be controlled by customer drawings — or relays having requirements not covered in this publication — will be assigned special catalog numbers upon request.

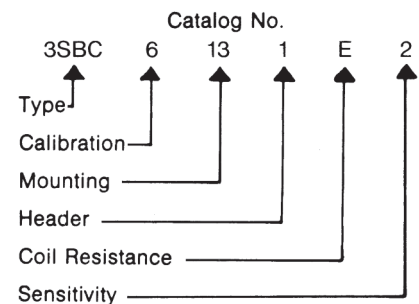

\* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.