



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G2		REVISED BY ECO-11-004587	11MAR11	RK	HMR

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

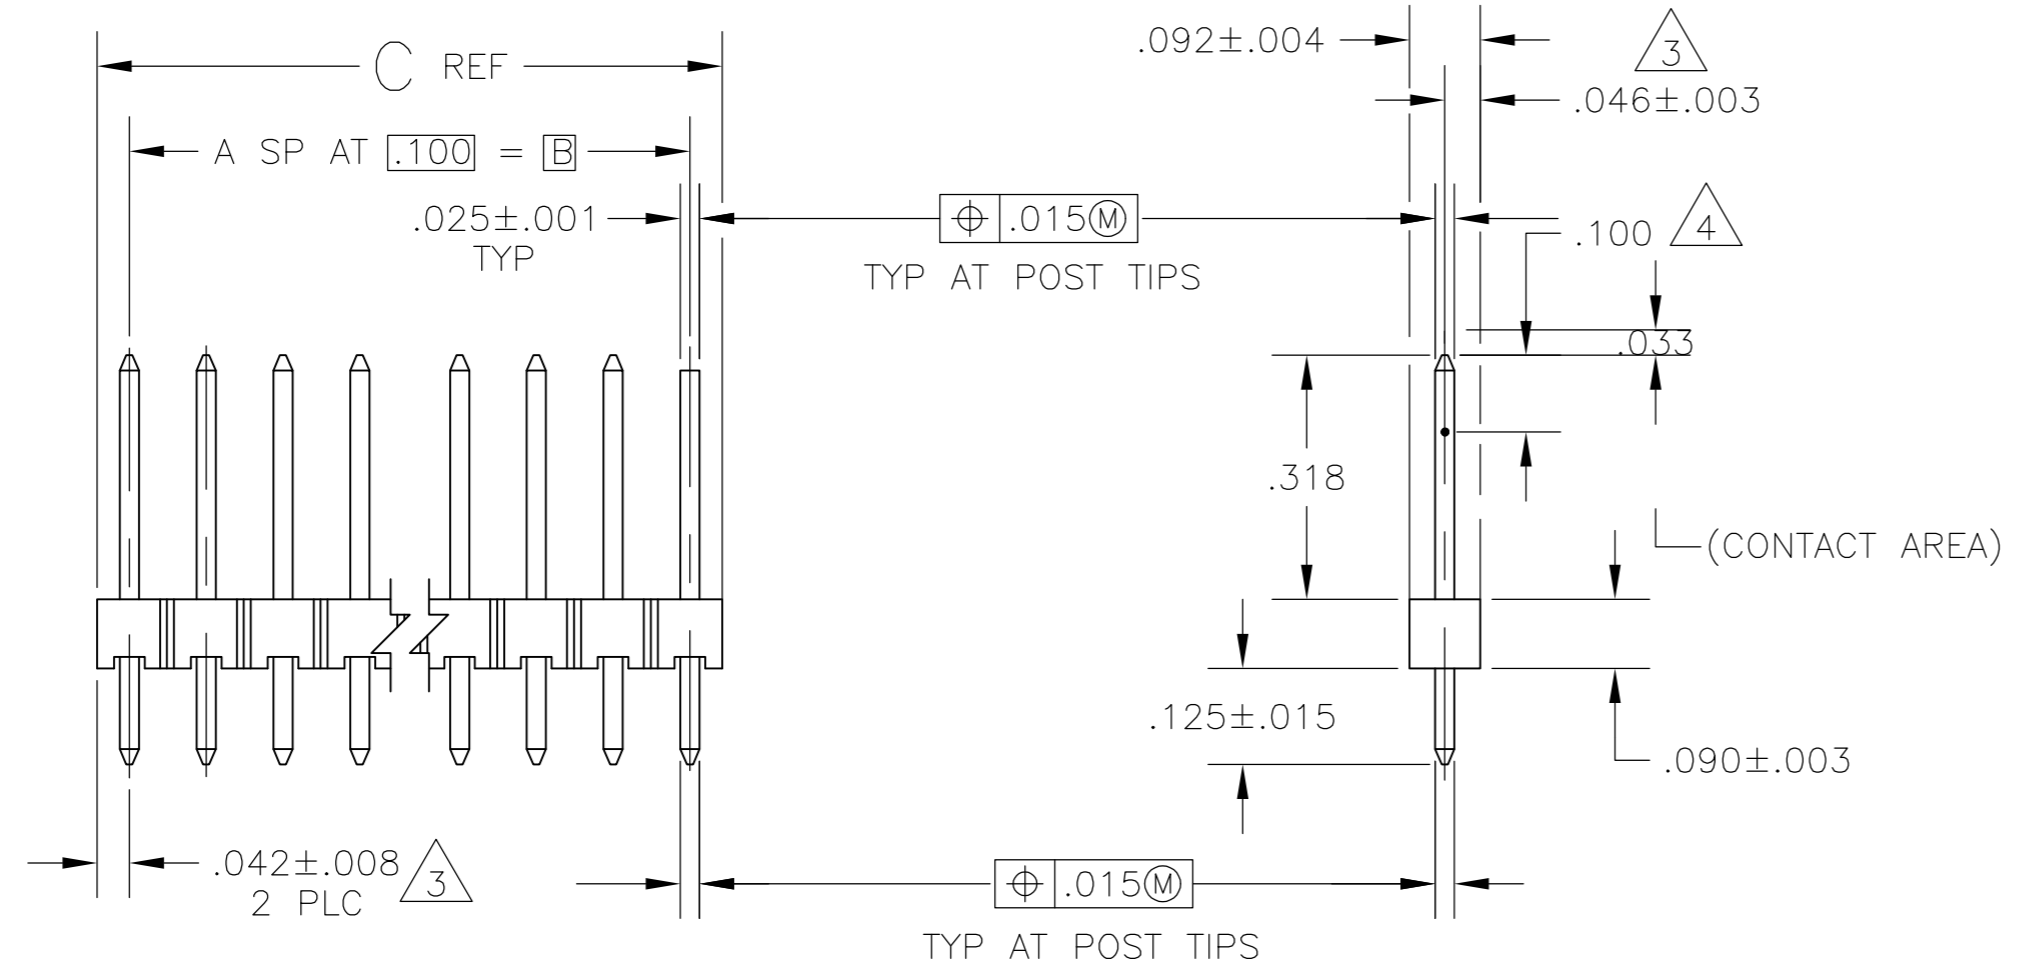

	C	B	A	NO OF POSN	PART NUMBER
△ OBSOLETE	3.984	3.900	39	40	4-102976-0
△ OBSOLETE	3.884	3.800	38	39	3-102976-9
△ OBSOLETE	3.784	3.700	37	38	3-102976-8
△ OBSOLETE	3.684	3.600	36	37	3-102976-7
△ OBSOLETE	3.584	3.500	35	36	3-102976-6
△ OBSOLETE	3.484	3.400	34	35	3-102976-5
△ OBSOLETE	3.384	3.300	33	34	3-102976-4
△ OBSOLETE	3.284	3.200	32	33	3-102976-3
△ OBSOLETE	3.184	3.100	31	32	3-102976-2
△ OBSOLETE	3.084	3.000	30	31	3-102976-1
△ OBSOLETE	2.984	2.900	29	30	3-102976-0
△ OBSOLETE	2.884	2.800	28	29	2-102976-9
△ OBSOLETE	2.784	2.700	27	28	2-102976-8
△ OBSOLETE	2.684	2.600	26	27	2-102976-7
△ OBSOLETE	2.584	2.500	25	26	2-102976-6
△ OBSOLETE	2.484	2.400	24	25	2-102976-5
△ OBSOLETE	2.384	2.300	23	24	2-102976-4
△ OBSOLETE	2.284	2.200	22	23	2-102976-3
△ SUPERSEDED BY 7-146277-2	2.184	2.100	21	22	2-102976-2
△ OBSOLETE	2.084	2.000	20	21	2-102976-1
△ OBSOLETE	1.984	1.900	19	20	2-102976-0
△ OBSOLETE	1.884	1.800	18	19	1-102976-9
△ OBSOLETE	1.784	1.700	17	18	1-102976-8
△ OBSOLETE	1.684	1.600	16	17	1-102976-7
△ OBSOLETE	1.584	1.500	15	16	1-102976-6
△ OBSOLETE	1.484	1.400	14	15	1-102976-5
△ SUPERSEDED BY 6-146277-2	1.384	1.300	13	14	1-102976-4
△ SUPERSEDED BY 6-146277-2	1.284	1.200	12	13	1-102976-3
△ SUPERSEDED BY 6-146277-2	1.184	1.100	11	12	1-102976-2
△ SUPERSEDED BY 6-146277-2	1.084	1.000	10	11	1-102976-1
△ SUPERSEDED BY 6-146277-2	.984	.900	9	10	1-102976-0
△ SUPERSEDED BY 6-146277-2	.884	.800	8	9	102976-9
△ SUPERSEDED BY 6-146277-2	.784	.700	7	8	102976-8
△ SUPERSEDED BY 5-146277-7	.684	.600	6	7	102976-7
△ SUPERSEDED BY 5-146277-7	.584	.500	5	6	102976-6
△ SUPERSEDED BY 5-146277-7	.484	.400	4	5	102976-5
△ SUPERSEDED BY 5-146277-7	.384	.300	3	4	102976-4
△ SUPERSEDED BY 5-146277-7	.284	.200	2	3	102976-3
△ SUPERSEDED BY 5-146277-7	.184	.100	1	2	102976-2
△ SUPERSEDED BY 5-146277-7	.084	—	—	1	102976-1

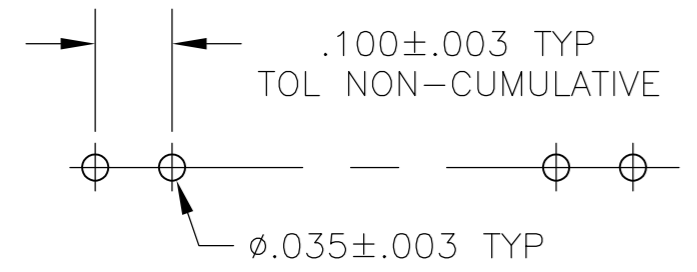

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL	09OCT87	STE TE Connectivity	
DIMENSIONS: INCHES		CHK T. CLARK	12OCT87		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK	13OCT87	NAME	
0 PLC ± -		PRODUCT SPEC		HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL, WITH .025 SQUARE POSTS	
1 PLC ± -		APPLICATION SPEC		SIZE	RESTRICTED TO
2 PLC ± -		—		CAGE CODE	DRAWING NO
3 PLC ± .005		—		A2	00779
4 PLC ± -		—		C=102976	
ANGLES ± -		WEIGHT		SCALE 4:1 SHEET 1 OF 1 REV G2	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK		FINISH POSTS: .00020 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL		CUSTOMER DRAWING	
POSTS: PHOSPHOR BRONZE		—		—	