



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



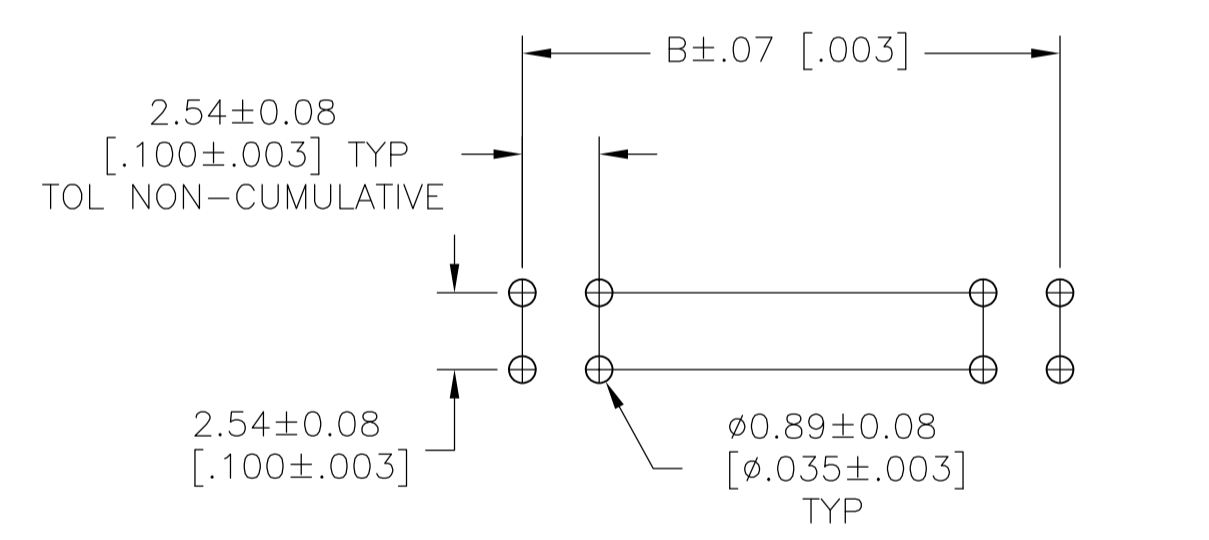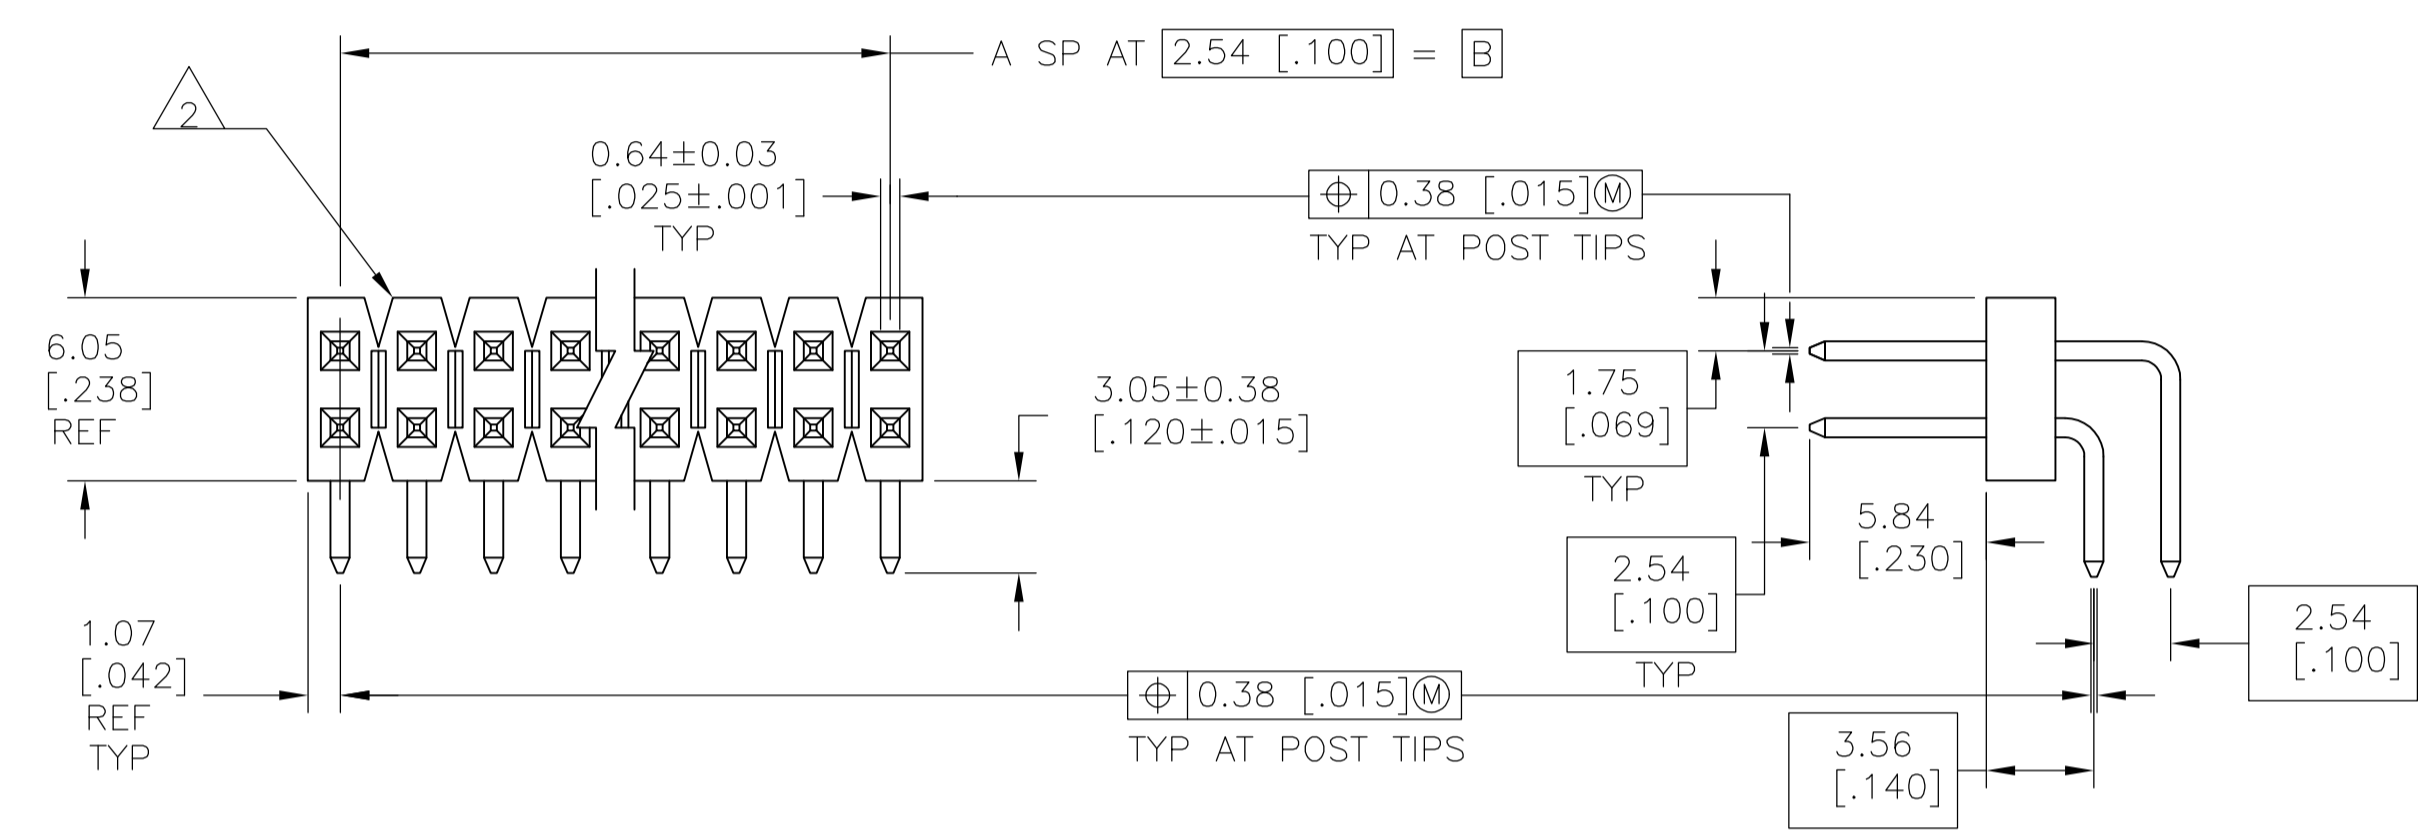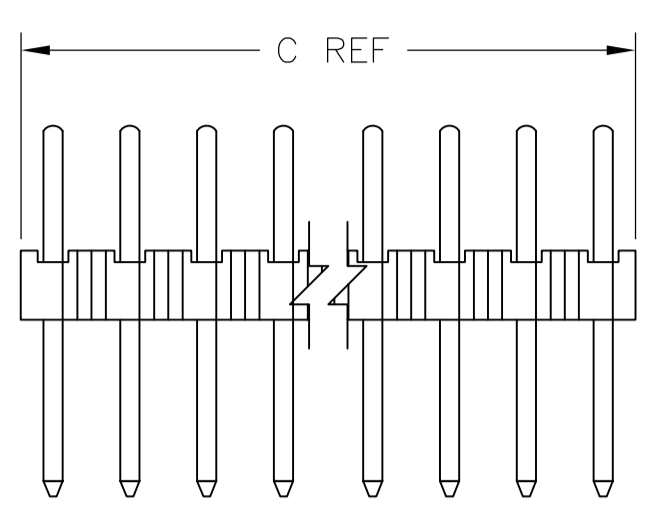

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 0.00254 [.000100] -0.00508 [.000200] MATTE TIN-LEAD OVER 0.00127 [.000050] NICKEL.
- 4 0.00254 [.000100] -0.00508 [.000200] BRIGHT TIN OVER 0.00127 [.000050] NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. POSTS: PHORPHOR BRONZE
- 7 0.00254 [.000100] -0.00508 [.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL.
- 8 HIGH TEMPERATURE CONFIGURATION
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

			101.19 [3.984]	99.06 [3.900]	39	80	9-103330-0
OBSOLETE			98.65 [3.884]	96.52 [3.800]	38	78	8-103330-9
OBSOLETE			96.11 [3.784]	93.98 [3.700]	37	76	8-103330-8
OBSOLETE			93.57 [3.684]	91.44 [3.600]	36	74	8-103330-7
OBSOLETE			91.03 [3.584]	88.9 [3.500]	35	72	8-103330-6
OBSOLETE			88.49 [3.484]	86.36 [3.400]	34	70	8-103330-5
OBSOLETE			85.95 [3.384]	83.82 [3.300]	33	68	8-103330-4
OBSOLETE			83.41 [3.284]	81.28 [3.200]	32	66	8-103330-3
OBSOLETE			80.87 [3.184]	78.74 [3.100]	31	64	8-103330-2
OBSOLETE			78.33 [3.084]	76.2 [3.000]	30	62	8-103330-1
OBSOLETE			75.79 [2.984]	73.66 [2.900]	29	60	8-103330-0
OBSOLETE			73.25 [2.884]	71.12 [2.800]	28	58	7-103330-9
OBSOLETE			70.71 [2.784]	68.58 [2.700]	27	56	7-103330-8
OBSOLETE			68.17 [2.684]	66.04 [2.600]	26	54	7-103330-7
OBSOLETE			65.63 [2.584]	63.5 [2.500]	25	52	7-103330-6
OBSOLETE			63.09 [2.484]	60.96 [2.400]	24	50	7-103330-5
OBSOLETE			60.55 [2.384]	58.42 [2.300]	23	48	7-103330-4
OBSOLETE			58.01 [2.284]	55.94 [2.200]	22	46	7-103330-3
OBSOLETE			55.47 [2.184]	53.34 [2.100]	21	44	7-103330-2
OBSOLETE			52.93 [2.084]	50.8 [2.000]	20	42	7-103330-1
OBSOLETE			50.39 [1.984]	48.26 [1.900]	19	40	7-103330-0
OBSOLETE			47.85 [1.884]	45.72 [1.800]	18	38	6-103330-9
OBSOLETE			45.31 [1.784]	43.18 [1.700]	17	36	6-103330-8
OBSOLETE			42.77 [1.684]	40.64 [1.600]	16	34	6-103330-7
OBSOLETE			40.23 [1.584]	38.1 [1.500]	15	32	6-103330-6
OBSOLETE			37.69 [1.484]	35.56 [1.400]	14	30	6-103330-5
OBSOLETE			35.15 [1.384]	33.02 [1.300]	13	28	6-103330-4
OBSOLETE			32.61 [1.284]	30.48 [1.200]	12	26	6-103330-3
OBSOLETE			30.07 [1.184]	27.94 [1.100]	11	24	6-103330-2
OBSOLETE			27.53 [1.084]	25.4 [1.000]	10	22	6-103330-1
OBSOLETE			24.99 [.984]	22.86 [.900]	9	20	6-103330-0
OBSOLETE			22.45 [.884]	20.32 [.800]	8	18	5-103330-9
OBSOLETE			19.91 [.784]	17.78 [.700]	7	16	5-103330-8
OBSOLETE			17.37 [.684]	15.24 [.600]	6	14	5-103330-7
OBSOLETE			14.83 [.584]	12.7 [.500]	5	12	5-103330-6
OBSOLETE			12.29 [.484]	10.16 [.400]	4	10	5-103330-5
OBSOLETE			9.75 [.384]	7.62 [.300]	3	8	5-103330-4
OBSOLETE			7.21 [.284]	5.08 [.200]	2	6	5-103330-3
OBSOLETE			4.67 [.184]	2.54 [.100]	1	4	5-103330-2
OBSOLETE			2.13 [.084]			2	5-103330-1

		101.19 [3.984]	99.06 [3.900]	39	80	4-103330-1
		101.19 [3.984]	99.06 [3.900]	39	80	4-103330-0
OBSOLETE		98.65 [3.884]	96.52 [3.800]	38	78	3-103330-9
OBSOLETE		96.11 [3.784]	93.98 [3.700]	37	76	3-103330-8
OBSOLETE		93.57 [3.684]	91.44 [3.600]	36	74	3-103330-7
OBSOLETE		91.03 [3.584]	88.9 [3.500]	35	72	3-103330-6
OBSOLETE		88.49 [3.484]	86.36 [3.400]	34	70	3-103330-5
OBSOLETE		85.95 [3.384]	83.82 [3.300]	33	68	3-103330-4
OBSOLETE		83.41 [3.284]	81.28 [3.200]	32	66	3-103330-3
OBSOLETE		80.87 [3.184]	78.74 [3.100]	31	64	3-103330-2
OBSOLETE		78.33 [3.084]	76.2 [3.000]	30	62	3-103330-1
OBSOLETE		75.79 [2.984]	73.66 [2.900]	29	60	3-103330-0
OBSOLETE		73.25 [2.884]	71.12 [2.800]	28	58	2-103330-9
OBSOLETE		70.71 [2.784]	68.58 [2.700]	27	56	2-103330-8
OBSOLETE		68.17 [2.684]	66.04 [2.600]	26	54	2-103330-7
OBSOLETE		65.63 [2.584]	63.5 [2.500]	25	52	2-103330-6
OBSOLETE		63.09 [2.484]	60.96 [2.400]	24	50	2-103330-5
OBSOLETE		60.55 [2.384]	58.42 [2.300]	23	48	2-103330-4
OBSOLETE		58.01 [2.284]	55.94 [2.200]	22	46	2-103330-3
OBSOLETE		55.47 [2.184]	53.34 [2.100]	21	44	2-103330-2
OBSOLETE		52.93 [2.084]	50.8 [2.000]	20	42	2-103330-1
OBSOLETE		50.39 [1.984]	48.26 [1.900]	19	40	2-103330-0
OBSOLETE		47.85 [1.884]	45.72 [1.800]	18	38	1-103330-9
OBSOLETE		45.31 [1.784]	43.18 [1.700]	17	36	1-103330-8
OBSOLETE		42.77 [1.684]	40.64 [1.600]	16	34	1-103330-7
OBSOLETE		40.23 [1.584]	38.1 [1.500]	15	32	1-103330-6
OBSOLETE		37.69 [1.484]	35.56 [1.400]	14	30	1-103330-5
OBSOLETE		35.15 [1.384]	33.02 [1.300]	13	28	1-103330-4
OBSOLETE		32.61 [1.284]	30.48 [1.200]	12	26	1-103330-3
OBSOLETE		30.07 [1.184]	27.94 [1.100]	11	24	1-103330-2
OBSOLETE		27.53 [1.084]	25.4 [1.000]	10	22	1-103330-1
OBSOLETE		24.99 [.984]	22.86 [.900]	9	20	1-103330-0
OBSOLETE		22.45 [.884]	20.32 [.800]	8	18	103330-9
OBSOLETE		19.91 [.784]	17.78 [.700]	7	16	103330-8
OBSOLETE		17.37 [.684]	15.24 [.600]	6	14	103330-7
OBSOLETE		14.83 [.584]	12.7 [.500]	5	12	103330-6
OBSOLETE		12.29 [.484]	10.16 [.400]	4	10	103330-5
OBSOLETE		9.75 [.384]	7.62 [.300]	3	8	103330-4
OBSOLETE		7.21 [.284]	5.08 [.200]	2	6	103330-3
OBSOLETE		4.67 [.184]	2.54 [.100]	1	4	103330-2
OBSOLETE		2.13 [.084]			2	103330-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. MARTINELLI 19OCT92		TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -		APPLICATION SPEC WEIGHT CUSTOMER DRAWING		NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 C/L, RIGHT ANGLE, WITH .025 SQUARE POSTS	
MATERIAL		FINISH		SIZE A1	
SEE TABLE WEIGHT SCALE 4:1		DRAWING NO 00779		SHEET 1 OF 1 REV M2	

REMARKS	PLATING	C	B	A	NO OF POSN	PART NUMBER
---------	---------	---	---	---	------------	-------------