



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0	A2		REVISED PER ECO-14-000707	20JAN2014	NK	RH

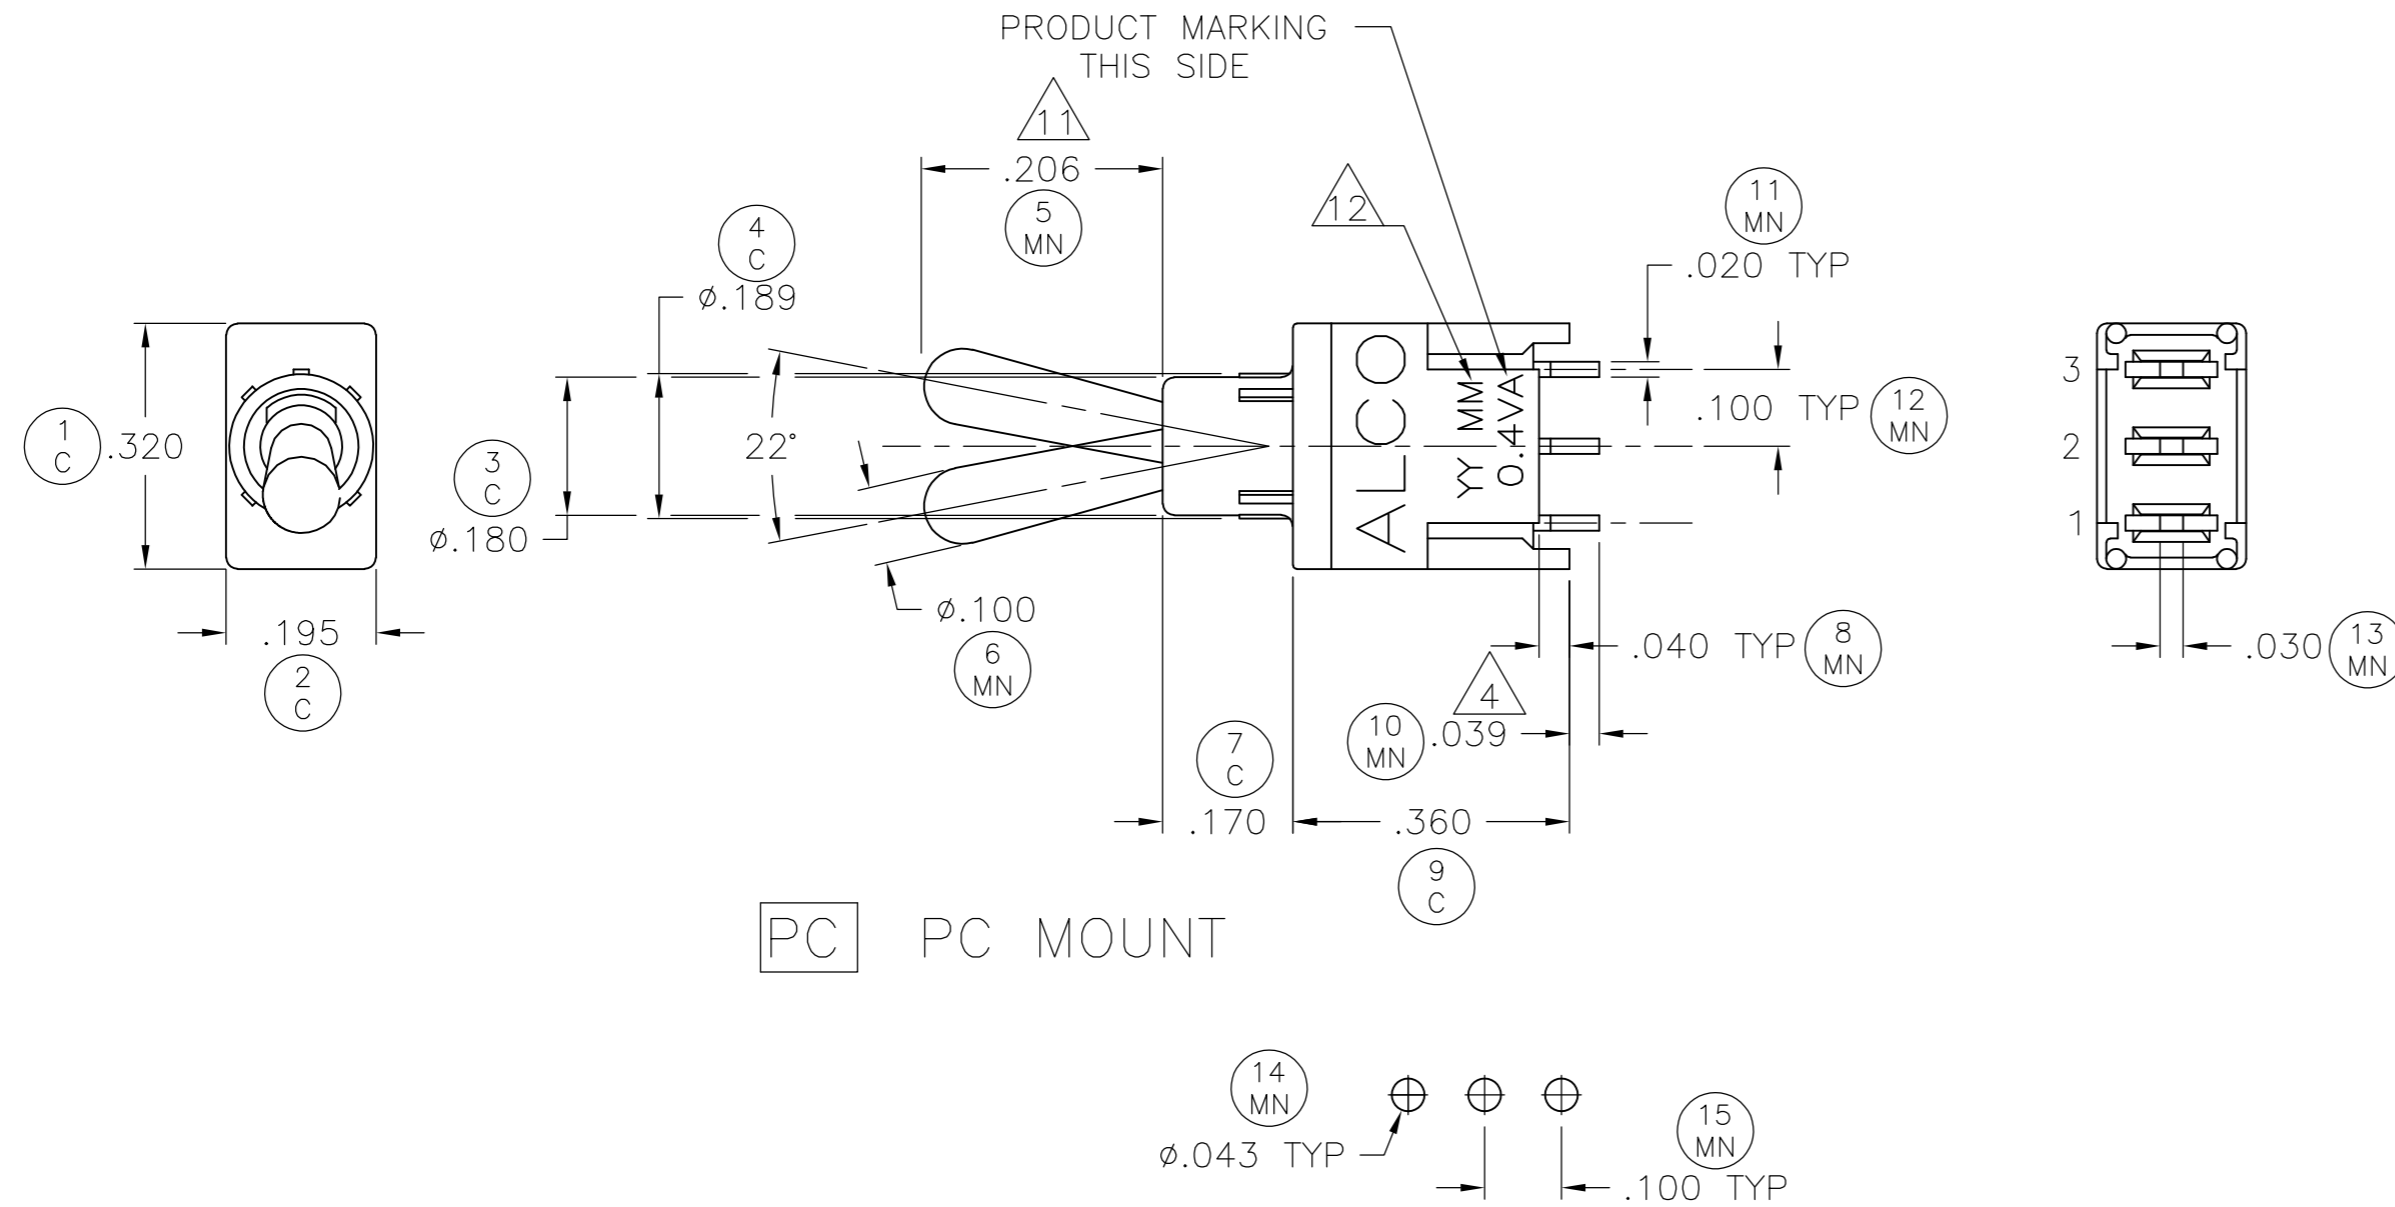

PC MOUNT

PC HOLE PATTERN
 TOLERANCES FOR ALL PCB LAYOUT DIMENSIONS TO BE ±.002


MATERIALS;
 CASE: GLASS FILLED HIGH TEMPERATURE POLYESTER.
 BUSHING: GLASS FILLED HIGH TEMPERATURE POLYESTER WITH ELECTROSTATIC DISSIPATIVE CHARACTERISTICS.
 ACTUATOR: NICKEL PLATED COPPER ALLOY.
 MOVABLE CONTACT: GOLD OVER NICKEL OVER COPPER ALLOY.
 STATIONARY CONTACT: GOLD OVER NICKEL OVER COPPER ALLOY.
 TERMINALS: TIN LEAD OVER COPPER ALLOY.
 TERMINAL SEAL: HIGH TEMPERATURE SEALANT.
 ACTUATOR SEAL: O-RING.

ELECTRICAL:
 CONTACT RATING: 0.4 VA @ 20 VDC OR PEAK AC.
 INITIAL CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1,000 MEGOHMS AT 500 VDC MIN.
 DIELECTRIC STRENGTH: 1,000 VOLTS RMS AT SEA LEVEL.
 LIFE EXPECTANCY: 60,000 CYCLES MECHANICAL ACTUATIONS AND 60,000 CYCLES AT 0.4 VA @ 20 VDC OR PEAK AC.

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -22°F TO +185°F (-30°C TO +85°C).
 STORAGE TEMPERATURE: -67°F TO +185°F (-55°C TO +85°C).

QUALITY ASSURANCE:
 ALL CRITICAL DIMENSIONS, (C), MUST BE 1.5Cpk MINIMUM.

- 1 INTERPRET DRAWING PER ASME Y14.5M-1994.
- 2 PKG 100 PCS/BAG 1 BAG/BOX.
- 4 TERMINALS SHALL BE TRIMMED TO .039 PRIOR TO APPLICATION OF SEALANT.
- 5 "O" RING, WELDS AND SEALS SHALL BE TESTED USING AUGATS STANDARD BUBBLE TEST.
- 6 ACTUATION FORCE: 800 GRAMS MAX.
- 7 EACH TERMINAL SHALL WITHSTAND A 6 LBS PULL FORCE.
- 8 EACH TOGGLE SHALL WITHSTAND A 10 LBS PULL FORCE AND PUSH TEST OF 30 LB.
- 10 TERMINAL NUMBERS ARE NOT MARKED ON SWITCH. (FOR REFERENCE ONLY).
- 11 DIMENSION MEASURED IN CENTER OFF POSITION.
- 12 DATE CODE: YYYY (YEAR, MONTH)

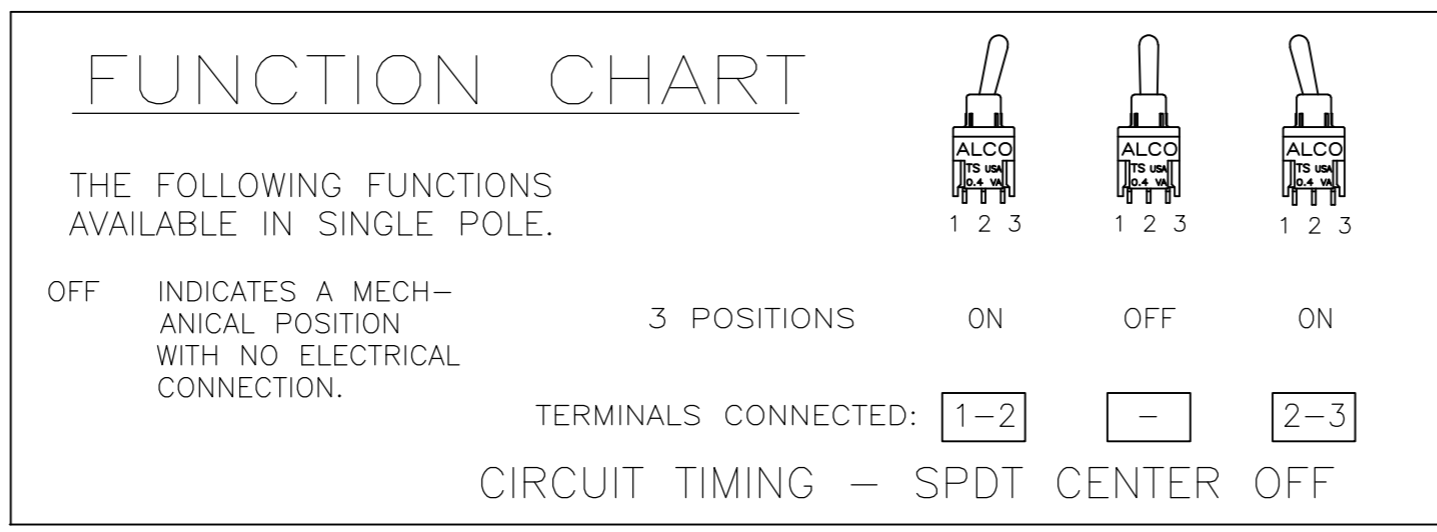

LEGEND:
 C = CRITICAL DIMENSION
 M = MAJOR DIMENSION
 MN = MINOR DIMENSION
 ST = STATISTICAL PROCESS CONTROLS

CRITICAL DIMS	MAJOR DIMS	LAST USED NO.	DELETED NO'S.	ST NO'S.
1,2,3,4,7,9		16		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 19JAN2007	TE Connectivity	
DIMENSIONS: INCHES		CHK M SILBOURN 1/19/07	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M WILBOURN 1/19/07	TOGGLE SWITCH TST11EGPC1	
0 PLC ± -		PRODUCT SPEC	SIZE A2	CAGE CODE 00779
1 PLC ± -		APPLICATION SPEC	DRAWING NO	RESTRICTED TO
2 PLC ± -			SCALE 1:1	SHEET 1 of 1
3 PLC ± .010				REV A2
4 PLC ± -				
ANGLES ± 1°				
MATERIAL FINISH		WEIGHT -	CUSTOMER DRAWING	