



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Product Overview

The 4006 DynaOhmTM by LUXdrive is a semiconductor based resistor that provides constant current to LEDs and strings of LEDs. It also reduces current to the LED(s) when the device temperature rises. It is the perfect replacement for a fixed resistor in circuits where the input voltage varies. The simple two wire DynaOhmTM eliminates complicated math from low power LED circuits. The DynaOhmTM can drop up to 24V (25mA model) allowing for use with 24VDC automotive systems and one LED.

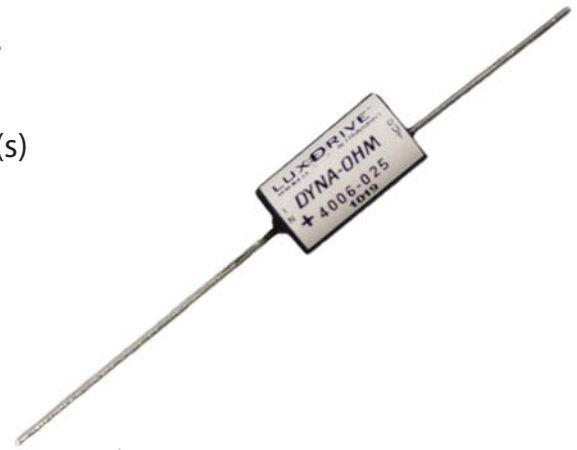

Features

- 20mA, 25mA, or 30mA, constant current output*
- Extremely small form factor* (0.25" diameter x 0.5" long)
- Output open circuit protection
- Pulse and strobe capable

Typical Applications

- Solar & Landscape Lighting
- Architectural Lighting
- Track Lighting
- Automotive & Marine Lighting
- Portable Lighting & Flashlights
- Point of Purchase Lighting
- Desk & Reading Lamps
- Signal & marker Lighting
- Flashing & Strobe Lighting
- Cabinet & Display Case Lighting
- Sign Lighting
- Flashlights



Part Number Identification Table

Table 1
Product Selection

Part Number	Maximum Voltage Drop	Drive Current	Connection Type
4006-020	30V	20mA	2 Wires
4006-025	24V	25mA	2 Wires
4006-030	20V	30mA	2 Wires

* Output current rating in milliamperes (mA): 20, 25, 30 or special order factory custom rating

Absolute Maximum Ratings

Input Voltage (transient)	50V _{DC}
Output Voltage	V _{IN} - 2.6V _{DC}
Reverse Voltage	-1V _{DC}
Power Dissipation	0.6W

Typical Characteristics

Output tolerance (within specified temp. range)	±10%
Min input voltage for current regulation	2.6V _{DC} + V _f LED
Min input voltage for device to conduct	0.6V _{DC}

Specifications

Output current, 4006-020	20mA ¹
Output current, 4006-025	25mA ¹
Output current, 4006-030	30mA ¹
Maximum Operating temperature (T _{case})	-40-+100°C
Storage temperature	-40-+135°C

1 - Measured with single emitter; output current drops slightly with additional series junctions to limit maximum power dissipation.

Application Figures




Figure 1.
25mA unit driving 1 5mm LED
(VIN ≥ 5VDC)

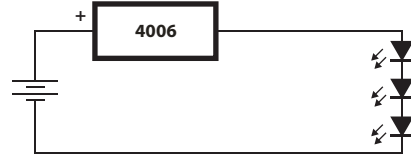


Figure 2.
25mA unit driving 3 5mm LED
(VIN ≥ 12VDC)

Physical Dimensions

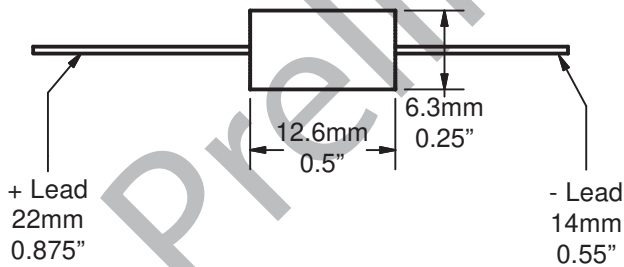


Figure 3
Top View - Typical Physical Dimensions

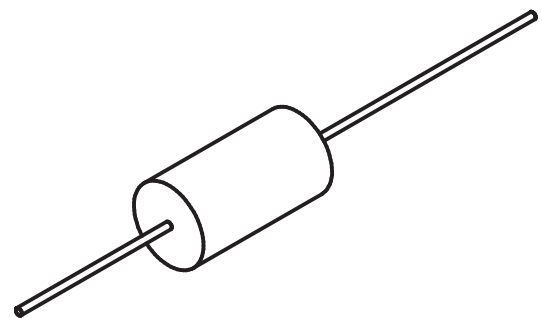


Figure 4
Side View