



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 404 Series

Position Sensor



Features:

- Short travel (0.5 inches), linear motion with spring return
- Accurate position feedback
- Compact design for small spaces
- Conductive plastic technology
- Long life (5 million actuations)

Applications:

- Robotics
- Automotive
- Heavy equipment
- Industrial automation
- Wing flap position
- Pedal position
- Satellite dish
- Electro surgical equipment

Electrical

Resistance range	1K to 150K Ohms
Standard resistance tolerance	±10%
Minimum practical resistance tolerance	±5%
Independent linearity	±1%
Minimum practical independent linearity	±0.5%
Input voltage	400 VDC maximum, not to exceed power rating
Dielectric strength	1,000 V rms
Insulation resistance	1,000 Megohms minimum
Output smoothness	0.1% maximum at 10" to 18" per minute
Actual electrical travel	0.50" ±0.015" (12.7 mm ±0.38 mm)
Electrical continuity travel	Within mechanical travel
End voltage	Maximum 0.5% of input voltage
Resolution	Essentially infinite
Temperature coefficient of resistance	-400 ppm/°C typical
Temperature coefficient of output voltage	±10 ppm/°C typical

Mechanical

Torque mechanical travel	0.56" ±0.015" (14.2 mm ±0.38 mm)
Actuating force	14 oz. maximum, internal spring to return slider to extended position
Backlash	0.003" maximum
Static stop strength	20 lb. minimum
Body style	Rectangular
Termination style	Turret terminations

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies
4200 Bonita Place, Fullerton, CA 92835 | Ph: +1 714 447 2300
www.bitechnologies.com | www.ttelectronics.com

Model 404 Series


Position Sensor




Environmental (MIL-PRF-39023)

Operating temperature range	-40°C to +125°C dynamic, -55°C to +125°C static
Load life	1 million shaft cycles at 0.25 Watts & 70°C, maximum 10% ΔR

Ordering Information

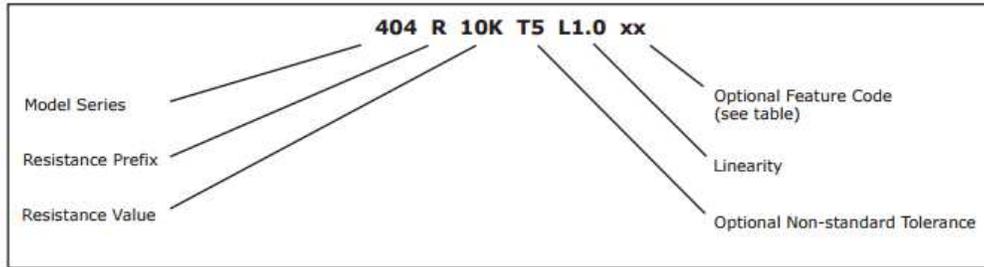


Circuit Diagram

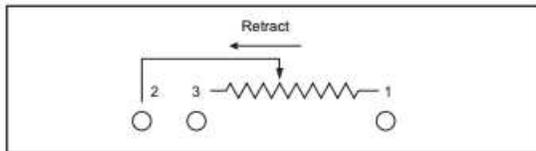

Feature Codes

Linearity Tape	LT
----------------	----

Outline Drawing

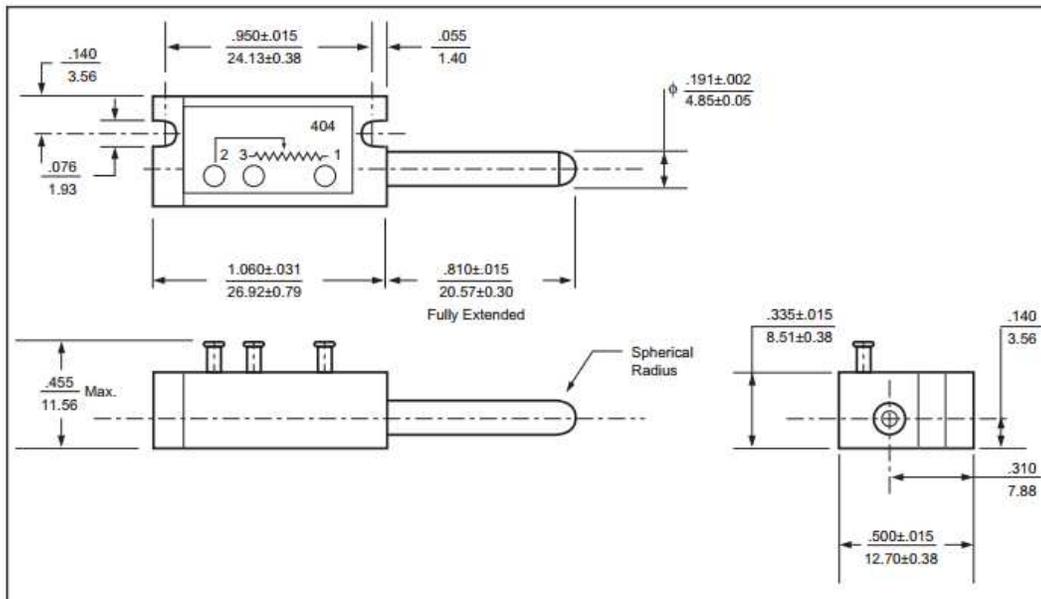

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies
4200 Bonita Place, Fullerton, CA 92835 | Ph: +1 714 447 2300
www.bitechnologies.com | www.ttelectronics.com