



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**RIDERSERIES  
RCL424060**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

**General ordering data**

Order No.	<a href="#">4058760000</a>
Type	RCL424060
Version	RIDERSERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 60 V DC, Continuous current: 8 A, Plug-in connection
GTIN (EAN)	4032248412662
Qty.	20 pc(s).

**RIDERSERIES**  
**RCL424060**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Ratings**

Conductor connection system	Plug-in connection	Humidity	40 °C / 93 % rel. humidity, no condensation
Weight	13 g	UL 94 flammability rating	V-0
Ambient temperature	-40 °C...+85 °C		

**Dimensions and weights**

Width	12.7 mm	Height	29 mm
Depth	15.7 mm	Weight	13 g
Net weight	12 g		

**Temperatures**

Operating temperature	-40 °C...+70 °C	Ambient temperature	-40 °C...+85 °C
Storage temperature	-40 °C...+85 °C		

**Input**

Rated control voltage	60 V DC	Rated current DC	7 mA
Coil resistance	8,300 Ω ± 12 %	Power rating	420 mW
Pull-in (sparkover) / drop-out voltage DC coil	45.0 V / 6.0 V		

**Output**

Rated switching voltage	250 V AC	Continuous current	8 A
making current	15 A / 4 s	Max. switching power	2000 VA
Switch-on delay	≤ 8 ms	Switch-off delay	≤ 6 ms
Duration of Bounce	Shutter/break contact element: typ. 1/3ms	Min. switching power	100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA
Max. switching frequency at rated load	0.1 Hz		

**Contact specifications**

No. of contacts	2	Contact design	CO contact
Contact material	AgNi 90/10	Mechanical service life	AC coil 5 x 10 <sup>6</sup> Switching cycles, DC coil 30 x 10 <sup>6</sup> Switching cycles

**Insulation coordination**

Rated voltage	250 V	Clearance and creepage distances for control side - load side	≥ 10 mm
Dielectric strength for control side - load side	5 kV <sub>eff</sub> / 1min	Protection degree	IP 20
Insulating material group	IIIa		

**Other technical data**

Version	Relay	Free-wheel diode	No
---------	-------	------------------	----

**Further details of approvals / standards**

Standards	IEC 61810-1, UL508
-----------	--------------------

**RIDERSERIES  
RCL424060**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01
eClass 7.0	27-37-16-01		

**Approvals**

Approvals



**RIDERSERIES  
RCL424060**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**


**Circuit diagram**

View on pins

2 C/O changeover contacts

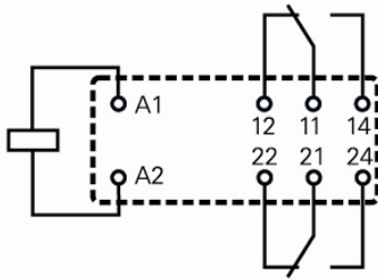


**DC load breaking capacity**

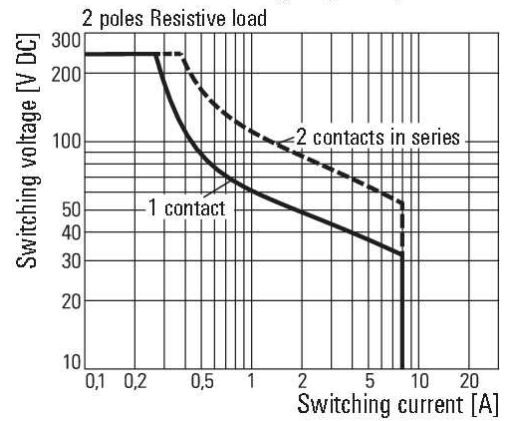

**Electrical endurance**

250 V AC Resistive load

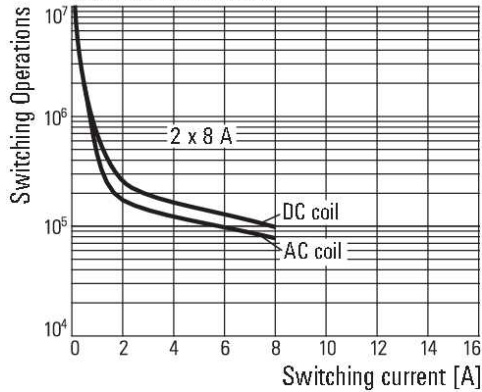

**RIDERSERIES  
RCL424060**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

**Tension clamp connection**



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

**General ordering data**

Order No.	Type	Version	GTIN (EAN)	Qty.
<a href="#">1124130000</a>	TRZ 60VUC 2CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Tension clamp connection	4032248905584	10 pc(s).

**Base**



Relay base for RIDERSERIES RCL relays

- Screw and tension clamp connection
- Standard and low heights
- Plug-in frame for PCB connections

**General ordering data**

Order No.	Type	Version	GTIN (EAN)	Qty.
<a href="#">8693930000</a>	SRC 2CO N	RIDERSERIES, Relay base, Screw connection	4032248365418	10 pc(s).

**RIDERSERIES  
RCL424060**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**
**Screw connection**


TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

**General ordering data**

Order No.	Type	Version	GTIN (EAN)	Qty.
<a href="#">1124010000</a>	TRS 60VUC 2CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905898	10 pc(s).

**Base**


- Coupling relay with positively driven contacts: for monitoring signals within safety-critical circuits
- Relays with positively driven contacts have a 99% diagnostics coverage and an excellent reputation for use in safety systems.
- The contacts interlock with each other in order to ensure a synchronous switching status between both contacts. This guarantees that the alert contact will maintain the same switching status in the event of an error (for example, if the working contact melts from an overload).

**General ordering data**

Order No.	Type	Version	GTIN (EAN)	Qty.
<a href="#">8783930000</a>	SRC 2CO Z	RIDERSERIES, Relay base, Tension clamp connection	4032248471430	10 pc(s).
<a href="#">8690830000</a>	SRC 2CO	RIDERSERIES, Relay base, Screw connection	4032248361519	10 pc(s).

**RIDERSERIES  
RCL424060**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

**Base**



Relay base for the RIDERSERIES RCI relays

- 1 and 2 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

**General ordering data**

Order No.	Type	Version	GTIN (EAN)	Qty.
<a href="#">8869500000</a>	SRC-I 2CO P	RIDERSERIES, Relay base, Continuous current: 16 A <sup>(1)</sup> , 8 A, PUSH IN spring connection	4032248614455	10 pc(s).