



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



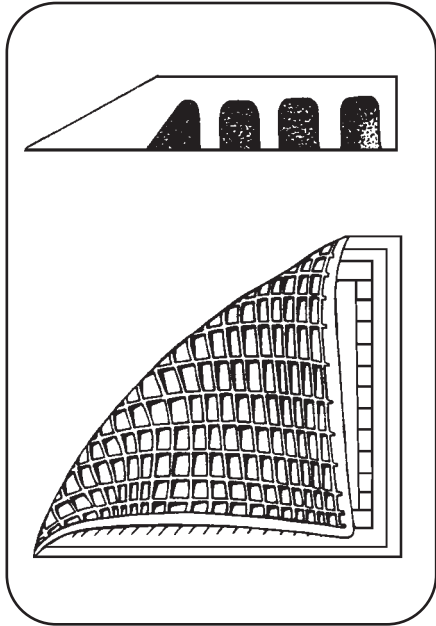


Black


Description:

Featuring an anti-fatigue, ergonomic air cell molded structure, this design offers cushioning and insulation to reduce fatigue in standing personnel. The interlocking feature allows the design of custom lengths and the conductive rubber insures rapid charge drainage. Beveled edges provide a gentle rise for safety and a finished appearance. When interlocked, the sections of material maintain conductivity automatically. This rubber mat resists damage from heat, abrasion, and common solvents. In lengthy applications, the use of ground connection for every 5 mat sections is recommended.


RoHS Compliance Statement
None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Desco Industries Inc. letter on-line at Desco.com.

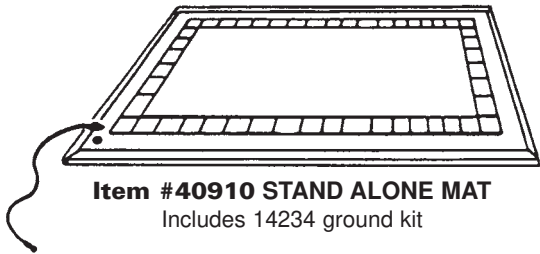

Item #40910 STAND ALONE MAT
Includes 14234 ground kit

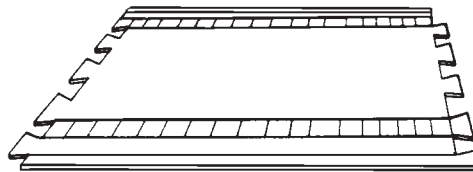

Item #40915 CENTER SECTION

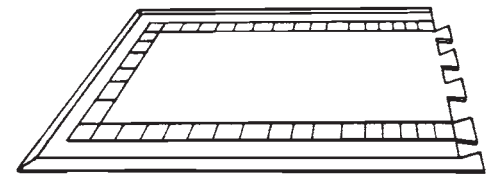

Item #40920 END SECTION

Limited Lifetime Warranty
Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/ conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by Desco Limited Warranty.



Made in America

STATFREE A™ CONDUCTIVE RUBBER, AIR CELL INTERLOCKING, .500"

DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
PHONE (909) 627-8178 FAX (909) 627-7449
DESCO EAST: 90 HUDSON RD, CANTON, MA 02021-1407
PHONE (781) 821-8370 FAX (781) 575-0172

MATERIAL STATFREE A™
DRAWING PM-95

DATE:
February
2008

Electrical Properties:

<u>Property</u>	<u>Test Method</u>	<u>Value</u>
RTG Resistance:	ANSI ESD S7.1	<10E6 Ohms
RTT Resistance:	ANSI ESD S7.1	<10E6 Ohms

Electrical Properties obtained by testing to industrial standards by an independent testing laboratory @ 10 Volts and 50% relative humidity unless otherwise specified. Complete text of the test report is available upon request.

Disclaimer:

All statements, technical data, and recommendations contained herein are based upon tests we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. The proper and correct applications of products and data is the responsibility of the user. Statements or recommendations not contained herein shall have no force or effect unless embodied in a written agreement signed by authorized officers of Desco Industries, Inc.

Specifications:

Construction: Molded homogeneous conductive rubber
Thickness: 0.50" Nominal (12.7mm)
Section Size: 28" x 36" nominal
Surface: Light texture embossing
Grounding: Mats must be properly grounded to insure proper electrical performance. Ask for Technical Bulletin TB-2000 for proper grounding instructions.
Weight: 10 lbs. per section
Hardness: 65 Shore A
Color: Black
Cleaning: For optimum electrical performance, surfaces must be cleaned regularly with a mild detergent and water solution. We suggest using Reztore™ Surface & Mat Cleaner Item #10435 or Static-Wipes Item #10600. Do not use cleaners with silicone. Silicone build-up will create an insulative film on the surface.

Per section 3 Definitions of Floor standard ESD STM7.1-2001 "Conductive Flooring Material: A floor material that has a resistance to ground of less than 10E6 ohms."