



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# TERMINAL BLOCKS

SRSL 4-T32

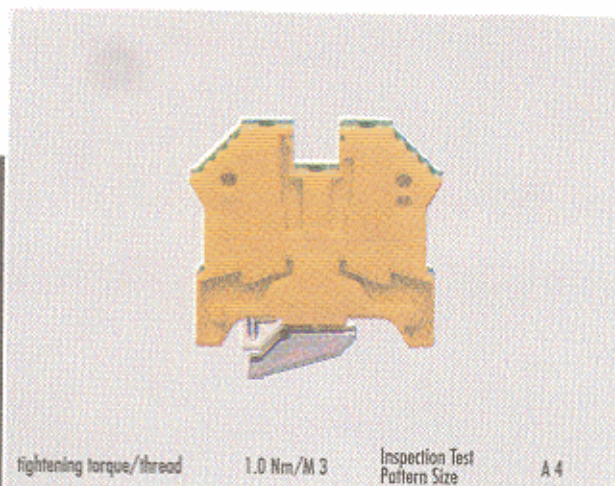

tightening torque/thread	1.0 Nm/M 3	Inspection Test Pattern Size	A 4
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 4-T32</b>	41065.2	green/yellow	100


**Ratings:**

<b>Dimensions</b>	TS 32
LxBxH (mm)	56x8x52
Stripped Length	12 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-6 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-4 mm <sup>2</sup>
Wire Size	AWG 22-10

SRSL 10-T32

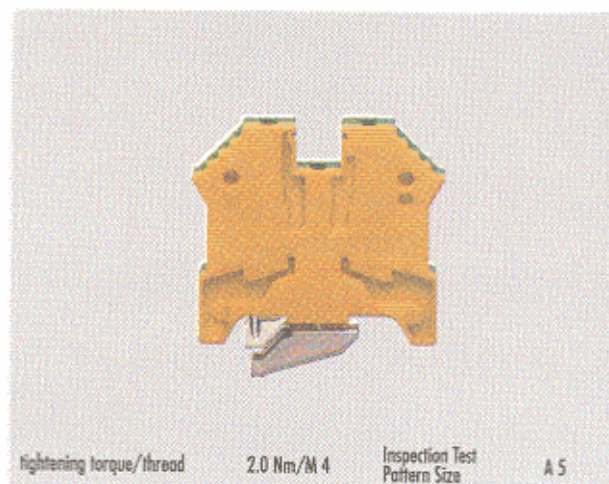

tightening torque/thread	2.0 Nm/M 4	Inspection Test Pattern Size	A 5
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 10-T32</b>	41066.2	green/yellow	80


**Ratings:**

<b>Dimensions</b>	TS 32
LxBxH (mm)	56x10x52
Stripped Length	12 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-10 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-10 mm <sup>2</sup>
Wire Size	AWG 20-8

SRSL 2.5-T35

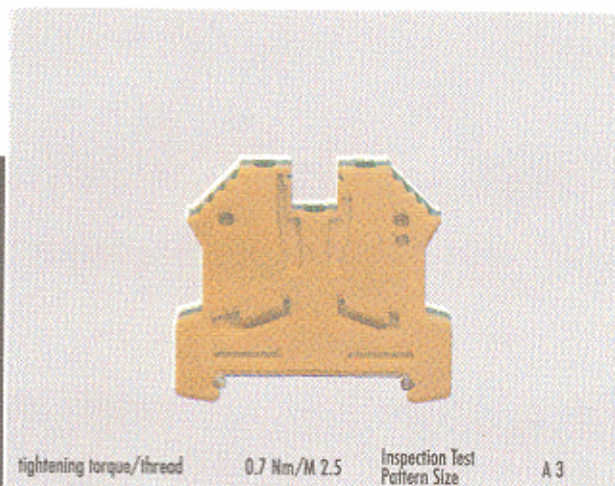

tightening torque/thread	0.7 Nm/M 2.5	Inspection Test Pattern Size	A 3
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 2.5-T35</b>	41056.2	green/yellow	100


**Ratings:**

<b>Dimensions</b>	TS 35
LxBxH (mm)	52x6x47
Stripped Length	10 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-4 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-2.5 mm <sup>2</sup>
Wire Size	AWG 22-14

SRSL 4-T35

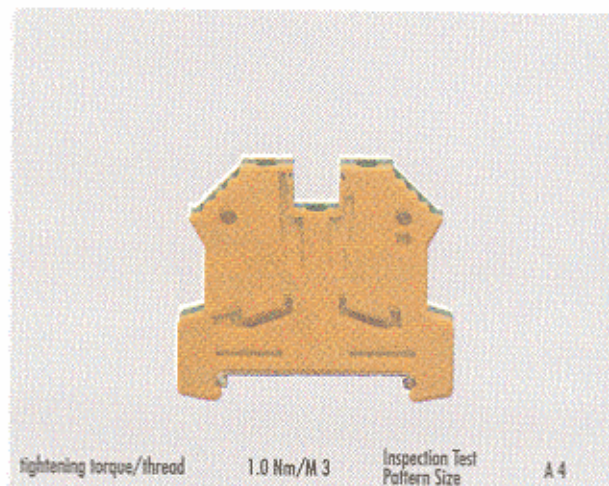

tightening torque/thread	1.0 Nm/M 3	Inspection Test Pattern Size	A 4
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 4-T35</b>	41212.2	green/yellow	100

**Ratings:**

<b>Dimensions</b>	TS 35
LxBxH (mm)	56x8x47
Stripped Length	12 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-6 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-4 mm <sup>2</sup>
Wire Size	AWG 22-10