



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TERMINAL BLOCKS

SRSL 35-T35



tightening torque/thread 5.0 Nm/M 6 Inspection Test Pattern Size B 8


Type Cat.-No. Qty.p.pck.
SRSL 35-T35 41199.2 green/yellow 20

Ratings:

Dimensions TS 35
 LxBxH (mm) 58x16x71
 Stripped Length 20 mm

Max Rated Cross Section
 Single Wire (solid) 2.5-50 mm²
 Stranded Wire (flexible) 2.5-35 mm²
 Wire Size AWG 12-2

SRSL 2.5-T35 DRL

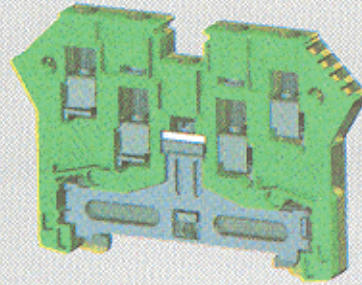

tightening torque/thread 0.7 Nm/M 2.5 Inspection Test Pattern Size A 3


Type Cat.-No. Qty.p.pck.
SRSL 2.5-T35 DRL 41062.2 green/yellow 100

Ratings:

Dimensions TS 35
 LxBxH (mm) 67x6x47
 Stripped Length 10 mm

Max Rated Cross Section
 Single Wire (solid) 0.2-4 mm²
 Stranded Wire (flexible) 0.2-2.5 mm²
 Wire Size AWG 22-14

SRSL 2.5-T35 DR

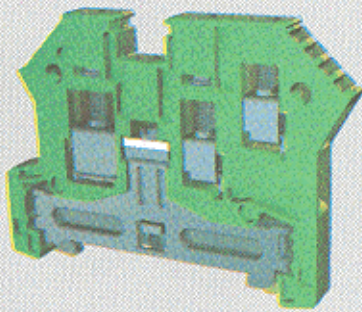

tightening torque/thread 0.7 Nm/M 2.5 Inspection Test Pattern Size A 3

Type Cat.-No. Qty.p.pck.
SRSL 2.5-T35 DR 41060.2 green/yellow 100

Ratings:

Dimensions TS 35
 LxBxH (mm) 62.5x6x47
 Stripped Length 10 mm

Max Rated Cross Section
 Single Wire (solid) 0.2-4 mm²
 Stranded Wire (flexible) 0.2-2.5 mm²
 Wire Size AWG 22-14