

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







	LENGTH	ITEM (1)	ITEM (2)	DRAWING NO.
PART NUMBER	INCH mm	UMC RIGHT ANGLE PLUG CONNECTOR, LOW PROFILE	CABLE	-415-0084-001/999
415-0084-050	1.97±.16 50±4	BODY - COPPER ALLOY- GOLD PLATED	SHIELD - TIN PLATED ANNEALED COPPER WIRE	
415-0084-100	3.94±.16 100±4	CONTACT - COPPER ALLOY - GOLD PLATED	DIELECTRIC - FEP	0 REVISIONS
415-0084-150	5.91±.16 150±4	INSULATOR - LCP - WHITE, UL94V-0	CENTER CONDUCTOR - SILVER PLATED ANNEALED COPPER	ENGINEERING RELEASE
415-0084-200	7.87±.16 200±4		WIRE, AWG#36 (7/.002)	1 10-20-06 P S R P 12-20-06 A B J D F CN 50727
415-0084-250	9.84±.31 250±8		JACKET - FEP -GREY WHITE	I I D B W ICON 30/2/
415-0084-300	11.81±.31 300±8		JACKET - PEP -GRET WHITE	INSULATOR-LCP BLACK WAS WHITE
415-0084-500	19.69±.31 500±8			* REVISION NUMBER FOLLOWED BY AN ALPHA *
				* CHARACTER INDICATES DRAWING CLARIFI- * * CATION OR PART NUMBER ADDITION ONLY. *

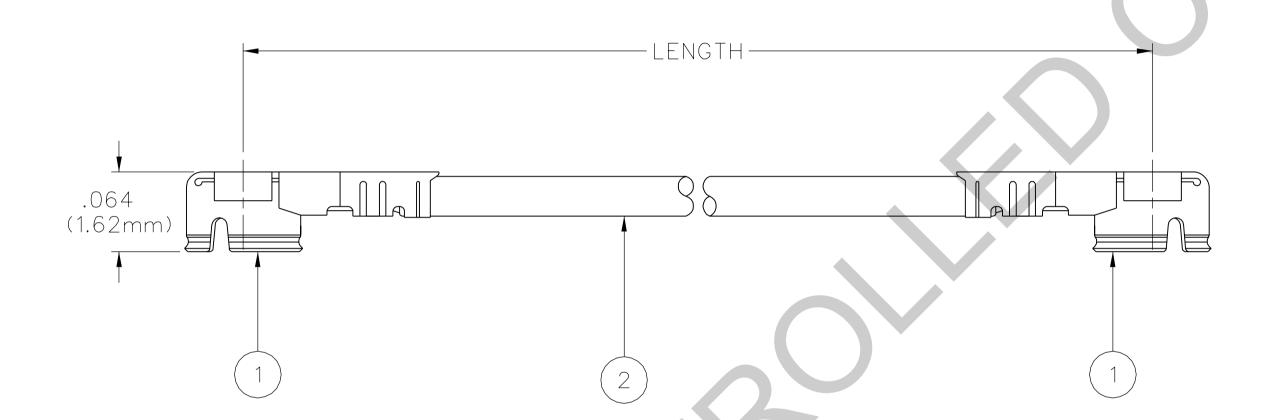

#### NOTES:

#### 1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-6 GHz VSWR: 1.30 MAX AT 0-3 GHz 1.50 MAX AT 3-6 GHz

WITHSTANDING VOLTAGE: 200 V AC INSULATION RESISTANCE: 500 MEGOHM MIN CONTACT RESISTANCE:

CENTER CONTACT - 20 MILLI-OHMS MAX OUTER CONDUCTOR - 20 MILLI-OHMS MAX

#### MECHANICAL:

COMPATIBILITY: MATES WITH U.FL SERIES HOLDING FORCE (MIN): 0.15 N (FEMALE CONTACT) DURABILITY: 30 CYCLES

#### ENVIRONMENTAL:

TEMPERATURE RANGE: -40°C TO +90°C

# CUSTOMER DRAWING

ECO 52911

2-7-11

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"µSTATION"

## COMPANY CONFIDENTIAL

TOLERANCE OTHERWISE S	DRAWN BY PAT		DATE 5-23-06			
DECIMALS .XX ——— .XXX ±.004 MATL	mm ———	CHE(	CKED BY RJB OVED BY PDW	12-13 DA	TE 3-06 TE 0-06	<b>           </b> 
FINISH		RELE,	ASE DATE	12-2 SCALE	0-06	2



Cinch Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256

UMC MATING CABLE PLUG .079 (2.0mm) MATING HEIGHT .032 (0.81mm) CABLE O.D.

S			
2	ΛF	2	

DRAWING NO.

of 2 | B - 415-0084-001/999