

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []

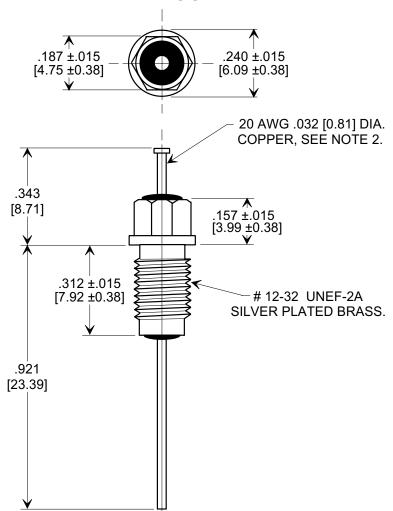



CIRCUIT

NOTES:

- 1. TUSONIX STANDARD PART NUMBER: 4203-051.
 TUSONIX RoHS COMPLIANT PART NUMBER: 4203-051 LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- 2. LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED COPPER. RoHS PART #: SILVER PLATED COPPER.
- 3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- 4. SUPPLIED WITH SILVER PLATED COPPER ALLOY HEX NUT AND INTERNAL TOOTH LOCK WASHER.

		MIN. CAP.			WORKING VOLTAGE (WVdc)				CURRENT	I.R. MIN. @ 100 (VDC.)	DWV	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220					s
		(pF)			85°C		125 °C		IDC	100 (VDC.)	(VDC)	10 MHz	10 MF		1 GHz	10 GHz	
		5000			200		100		10 A	10 G Ω	400	20	65	5	70	70	
DECODE	0	"A" ADDED.		RDN TO COMP FMT & ADDED METRIC, S.M. 02-12-02	20522-6-05	IR & DWV. ADDED A ED NOTES. DIM .240 35. S.M. 11-15-05	7 I				TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± /// 3 PLC. DECIMAL ± .031 [0.79]		BUSHING STYLE EMI FILTER				
Ιz	1 4	RENT UNIT 08-20-85					-3-03				ANGLES ± /		Drawn S.M. 05-22-02 Scale x		Scale X 3		
15 Rev-0 REVISION	102.						35. S				TUSO	NIT	Approved J.Mc. 05-22-02				
X-2015 Rev-0	Original C.O.	CURRENT L.E. 08-20					/ S				TUCSON, A		A		4203	8-051	