

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










MARKETING SALES DRAWING

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods. DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []

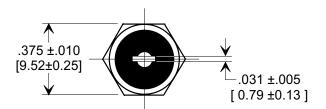



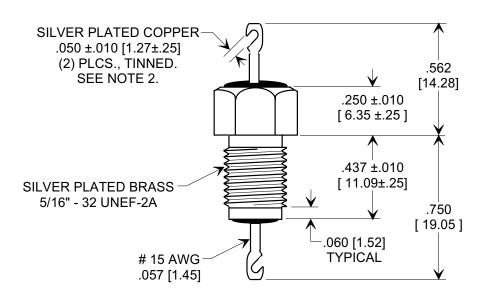

NOTES:

- 1. TUSONIX STANDARD PART NUMBER: 4206-016.
 TUSONIX RoHS COMPLIANT PART NUMBER: 4206-016 LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- 2. LEAD FINISH: SILVER PLATED SOLDER DIPPED. RoHS PARTS ARE DIPPED IN LF SOLDER.
- 3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- 4. SUPPLIED WITH SILVER PLATED COPPER ALLOY HEX NUT AND INTERNAL TOOTH LOCK WASHER.

	1000 MIN.	1000		25 A	3	35	65	65
		85 °C	125 °C		10	100	1	10
	CAP. (pF)	WORKING VOLTAGE DC (V)		CURRENT dc (A)	MHz	MHz	GHz	GHz
					MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			

RECORD 1-3 & CIRCUIT. 23 1		TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± 3 PLC. DECIMAL ± .031 [.78]	PASS FILTER	
ON F ON F ON F 126		ANGLES ± ///	Drawn	S.M. 01-27-00 Scale 2 X
NO1 NO1 NO1 006		TUSONIX	Approved H.R. 01-27-00	
Orignal C.O. 2 ADDED S.M. 10-		TUSUNIX TUCSON, ARIZONA	Α	4206-016