

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










## MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC [ ]

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.





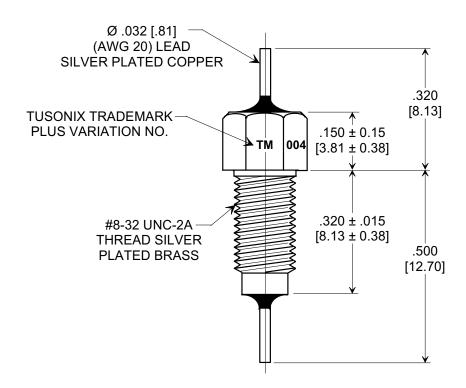

## NOTES:

- TUSONIX STANDARD PART NUMBER: 4251-004.
   TUSONIX RoHS COMPLIANT PART NUMBER: 4251-004 LF.
   CUSTOMER MUST SPECIFY STANDARD OR ROHS PART NUMBER WHEN ORDERING.
- 2. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- 3. SUPPLIED WITH SILVER PLATED COPPER ALLOY, HEX NUT AND INTERNAL TOOTH LOCK WASHER.

		MIN	۱. C	AF	<u>,                                    </u>	125° WOR	フ	CURRENT Vdc		IR MIN.		DWV		MINIMUM NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220							
						VOLT	Ξ							1 MHz	1 MHz 10 MH		100 MHz	1 GHz 10 G	10 GHz	z	
		2	28,000 pF			100 VDC			10 A		10 G Ω		300 VDC		10	38		75	75	75	
	0	CHNGD.	1	07-11-94	2	ADDED ED.	3	-	4		5	WAS	F	9	TOLERANCES Unless Otherwise Specified		Title MULTILAYER BUSHING STYLE				
Coor	ase 11	DIM'S REVISED, TITLE E.C. 05-26-92	7	WAS 70. E.C.		FMT & PLATI	_	X & OED	NZE S	& 2.	7	SS -1-00	-5-02		DECIMA	L <b>±</b> .031	[0.79]		EMI FI	LTER	
						OMP F LVER -98	0-9-	TRIC LOY LOY	BRC	ES 1	-6-02				ANGLES	± /-/	_	Drawn g	S.M. 12-03-98	Sca	lle 4 X
Rev-(	Rele 66					S SIL	202	N ME DWA IR AI	HOR 624	N 2	24 24 24 24		331		-	TUSONIX		Approved	Approved E.F. 12-03-98		
X-2015 Rev-0	Origina C.O.				9406	RDN TO NOTE 8 S.M. 12	19981	DIM'S I IR MIN, COPPI	PHOSF 2002	ADDEC S M 04	20050	ON BUS	20060			ON, ARIZ		Α	42	51-004	