

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









MARKETING SALES DRAWING

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods. DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []



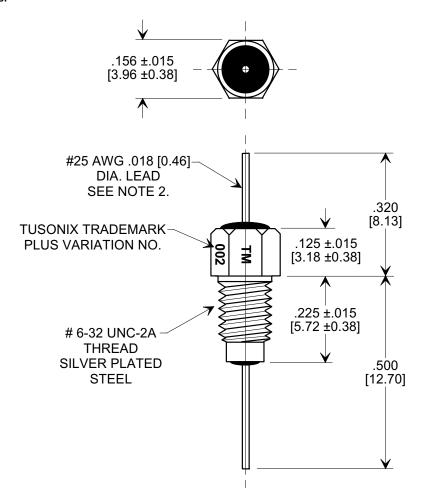

NOTES:

- TUSONIX STANDARD PART NUMBER: 4260-002.
 TUSONIX RoHS COMPLIANT PART NUMBER: 4260-002 LF.
 CUSTOMER MUST SPECIFY STANDARD OR ROHS PART NUMBER WHEN ORDERING.
- 2. LEAD FINISH: STANDARD PART #: SOLDER PLATED COPPER. RoHS PART #: SILVER PLATED.
- 3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- 4. SUPPLIED WITH SILVER PLATED COPPER ALLOY HEX NUT AND INTERNAL TOOTH LOCK WASHER.

	7,500				50 VDC				10 GΩ	125 VDC	3 A	8	18	45	65	70	70
	MIN. CAP.(pf)			+ 125 °C DC WORKING VOLTAGE					I.R. MIN. @ 100 VDC	DWV	CURRENT	3 MHz	10 MHz	30 MHz	100 MHz	300 MHz	1 GHz
								: 1				MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
	30	0	& TITLE CHGD.	1	OMP FMT. -02	2052	ED NOTES 1-4. 12-06-05	1118-2-04 3				Unle	LERANCES- ss Otherwise Specified			TI LAYE	
	RECORD	ease 1		2999								DECIMA	L ± .031 [0.	79]	EMI	FILTER	
	— ı								ı			ANGLES	6 ± ///	Drawr	S. M. (03-05-02	Scale 4 X
Rev-0	NOISIN	Rele 661	:НGD :6-92		O COMP -05-02										Approved T.C. 03-05-02		
X-2015 Rev	RE.	Origina C.O.	DIM'S C E.C. 5-2		RDN TC S.M. 03			20051					SONI: ON, ARIZON	_	4	4260-00 2	2