



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



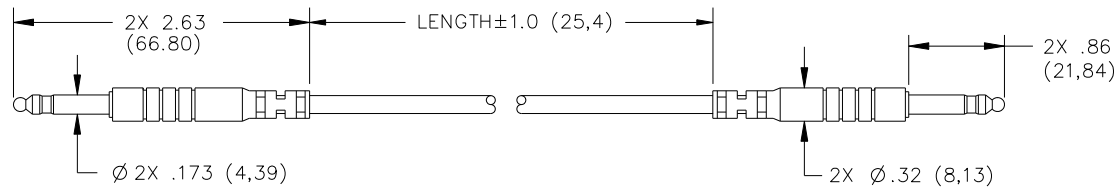

FEATURES:

- Bantam plugs are molded directly to the cable for optimum durability

MATERIALS:

Bantam Plug: Body – Brass, Insulation – PVC, Color: Black

Audio Cable: Two Conductor Twisted Pair With Spiral Shield, Color: Gray

Capacitance: 40 pF/Ft.

Conductors: 22 AWG, Stranding: 7 x 30

Jacket: PVC, O.D. .180" (4,6mm) Nom., Marking: "POMONA 4279-XX"

Finish: 4279N Brass nickel plated

RATINGS:

Operating Temperature: +50°C (+122°F)

Operating Voltage: 300 VRMS

ORDERING INFORMATION: XX = Cable Length, Standard Lengths:

Model 4279-XX :12" (30,5 cm), 24" (61 cm), 36" (91,44cm), 48" (121,92cm),

60" (152,4cm)

4279N-XX: 24" (61 cm), 36" (91,44cm), 60" (152,4cm)

Additional lengths can be quoted upon requested.

Ordering Example: 4279-12, Cable length is 12" with non-plated Bantam connector

4279N-24, Cable length is 24 with brass nickel plated Bantam connector

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA