



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 4281 Miniature Phone Plug To Double Plug Balanced Line

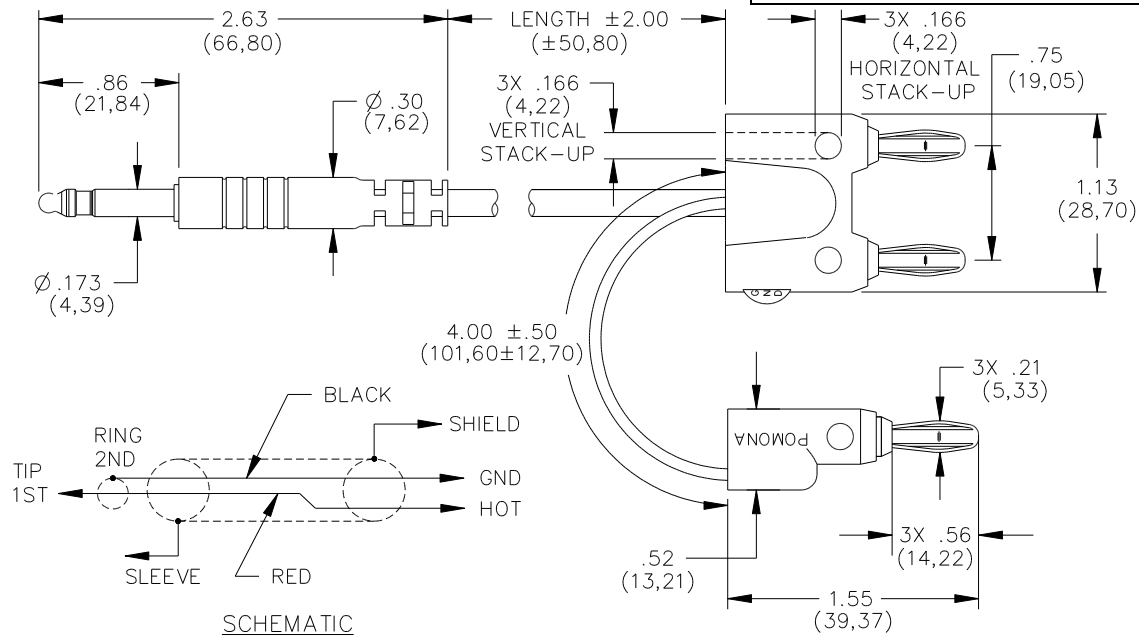

FEATURES:

- Converts Bantam (Miniature Phone Plug) Female to Triple Banana Plug Output
- Banana Plug provided for shielding or grounding.
- Lengths other than those specified are available upon request.

MATERIALS:

Conn: 1st end – Bantam Phone Plug

Cable: 2 conductor stranded copper, 26 AWG. PVC jacket. (.180) O.D. Color: Gray.

Marking: “POMONA 4281-XX”.

Shield Lead: 20 AWG, stranding 41x36 tinned copper, PVC. 2.21 (.087) Dia. Color: Green.

Conn: 2nd end – Double and Single Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Berylco 25 Cond. HT.

Plug Body – Brass per QQ-B-626, Alloy 360, 1/2 Hard.

Finish: Nickel plated per QQ-N-290, Class 2,

200/300 microinches.

Insulation: Double Banana Plug – Polypropylene molded to plug bodies and cable. Color: Gray.

Marking: “POMONA ELECTRONICS Single Banana Plug – Polypropylene molded to plug body and wire. Color: Green.

Marking: “POMONA ELECTRONICS

RATINGS:

Operating Temperature.: +55° C. (+131° F.) Max.

Operating Voltage: 500 V Peak.

ORDERING INFORMATION: Model 4281-XX
XX=Wire Length, Standard Lengths: 60” (1524)
Ordering Example: 4281-60 Cable Length is 60” (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ±.005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

W:\pomona\grponly\Datasheet Updates\Updates 2005\d4281_1_02.doc

More drawings available at www.pomonaelectronics.com

Page 1 of 1