mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Pomona®

Model 4298 Adapter, SMA Male To Type "N" Female

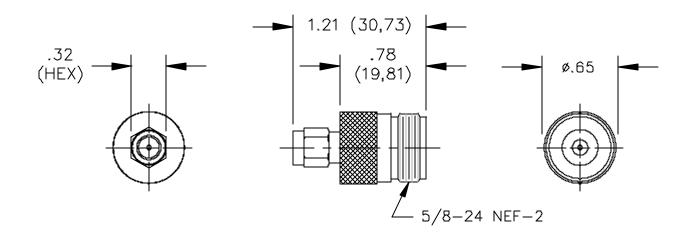

MATERIALS:

Body: Gold Plated Beryllium Copper, Male Contact - Gold Plated Brass, Female Contact – Gold Plated Beryllium Copper Dielectric: Teflon Finish: Body and Contacts – Gold plated Marking: "Pomona 4298"

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max. Inner Conductor/Shield: 335VRMS Max. Operating Temperature: -65°C (-85°F) to +165°C (+329°F) Nominal Impedance: 50 Ohms Frequency Range: 0-12.4 GHz.

ORDERING INFORMATION: Model 4298

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 5/31/02 SY/EH/LS
 Sales: 800-490-2361 Fax: 888-403-3360

 Last saved by PN
 Technical Assistance: 800-241-2060

S:\Engineering\Release\DataSheets\FlukeDataSheet\d4298_1_02.doc