



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



BXC SERIES
Load Life : 105°C 8000~12000 hours

*For LED Lighting.

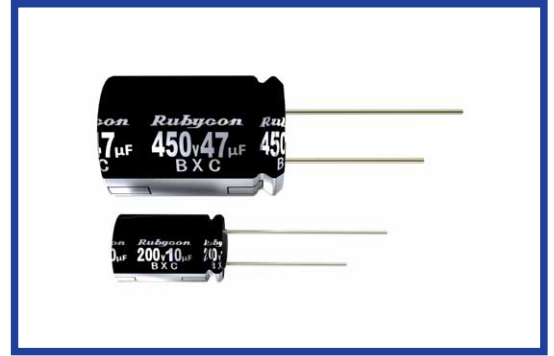
◆SPECIFICATIONS

Items	Characteristics																	
Category Temperature Range	-25~+105°C																	
Rated Voltage Range	160~500Vdc																	
Capacitance Tolerance	±20% (20°C, 120Hz)																	
Leakage Current(MAX)	<table border="1"> <tr> <th>CV ≤ 1000</th> <th>CV > 1000</th> </tr> <tr> <td>I = 0.1CV + 40µA (1 minute)</td> <td>I = 0.04CV + 100µA (1 minute)</td> </tr> <tr> <td>I = 0.03CV + 15µA (5 minutes)</td> <td>I = 0.02CV + 25µA (5 minutes)</td> </tr> </table>	CV ≤ 1000	CV > 1000	I = 0.1CV + 40µA (1 minute)	I = 0.04CV + 100µA (1 minute)	I = 0.03CV + 15µA (5 minutes)	I = 0.02CV + 25µA (5 minutes)	I = Leakage Current(µA) C = Capacitance(µF) V = Rated Voltage(Vdc)										
	CV ≤ 1000	CV > 1000																
I = 0.1CV + 40µA (1 minute)	I = 0.04CV + 100µA (1 minute)																	
I = 0.03CV + 15µA (5 minutes)	I = 0.02CV + 25µA (5 minutes)																	
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <th>Rated Voltage (Vdc)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> <th>500</th> </tr> <tr> <td>tanδ</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> </tr> </table>	Rated Voltage (Vdc)	160	200	250	350	400	450	500	tanδ	0.15	0.15	0.15	0.20	0.20	0.20	0.24	(20°C, 120Hz)
Rated Voltage (Vdc)	160	200	250	350	400	450	500											
tanδ	0.15	0.15	0.15	0.20	0.20	0.20	0.24											
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements.																	
	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	<table border="1"> <tr> <th>Case Size</th> <th>Life Time (hrs)</th> </tr> <tr> <td>8×11.5, 10×12.5</td> <td>8000</td> </tr> <tr> <td>10×16, 10×20</td> <td>10000</td> </tr> <tr> <td>φD ≥ 12.5</td> <td>12000</td> </tr> </table>	Case Size	Life Time (hrs)	8×11.5, 10×12.5	8000	10×16, 10×20	10000	φD ≥ 12.5	12000		
	Capacitance Change	Within ±20% of the initial value.																
Dissipation Factor	Not more than 200% of the specified value.																	
Leakage Current	Not more than the specified value.																	
Case Size	Life Time (hrs)																	
8×11.5, 10×12.5	8000																	
10×16, 10×20	10000																	
φD ≥ 12.5	12000																	
		※500Vdc:10000hrs																
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <th>Rated Voltage (Vdc)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> <th>500</th> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> <td>6</td> </tr> </table>	Rated Voltage (Vdc)	160	200	250	350	400	450	500	Z(-25°C)/Z(20°C)	3	3	3	6	6	6	6	(120Hz)
Rated Voltage (Vdc)	160	200	250	350	400	450	500											
Z(-25°C)/Z(20°C)	3	3	3	6	6	6	6											

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		120	1k	10k	100k ≤
Coefficient	1~5.6µF	0.20	0.40	0.80	1.00
	6.8~18µF	0.30	0.60	0.90	1.00
	22~82µF	0.40	0.70	0.90	1.00
	100~220µF	0.45	0.75	0.90	1.00

◆OPTION


	Code
PET Sleeve	EFC

◆PART NUMBER

□□□	BXC	□□□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ **DIMENSIONS**

(mm)

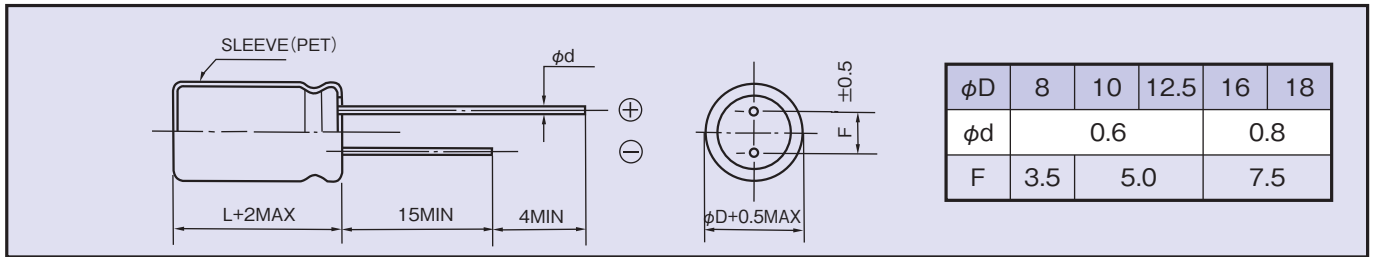

◆ **STANDARD SIZE**

Size φD×L(mm), Rated Ripple Current (mA r.m.s./105°C, 100kHz)

Cap(μF) \ Vdc	160		200		250		350	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7					8×11.5	160	10×12.5	150
5.6							10×12.5	180
6.8					10×12.5	250	10×16	280
10	10×16	320	10×16	320	10×16	320	10×20	350
18							10×20	350
22	10×20	500	10×20	500	10×16 10×20	470 500	12.5×20	650
33	10×20	650	10×20	650	12.5×16 12.5×20	760 800	16×20	900
47	10×20	750	12.5×20	980	12.5×20	980	16×20	1080
56					12.5×20 18×16	1080 960		
68	12.5×20	1180	12.5×25 16×20	1300	12.5×25 16×20	1300	18×25	1470
82			16×20	1380	12.5×30 16×20	1500 1440	18×25	1530
100	12.5×25 16×20	1420	16×20	1420	16×25 18×20	1530 1440		
120					18×20	1500		
150	16×25	1890	16×25	1890	18×25	1960		
220	18×25	2370	18×25	2370				

Cap(μF) \ Vdc	400		450		500	
	Size	Ripple	Size	Ripple	Size	Ripple
1	8×11.5 10×12.5	60 70				
1.5	8×11.5 10×12.5	90 100				
1.8	8×11.5 10×12.5	95 120				
2.2	8×11.5 10×12.5	95 140				
3.3	10×12.5 10×16	150 180				
4.7	10×16	220	10×16 10×20	180 220		
5.6	10×16	250	10×16 10×20	200 250		
6.8	10×16	280	10×16 10×20	230 280		
8.2			10×20	280		
10	10×20	350	10×20 12.5×16 12.5×20	330 360 450	12.5×20	320
15	12.5×20	550	12.5×20 12.5×25 16×16	450 600	12.5×25 16×20	440
22	12.5×25 16×20	760	12.5×25 16×20	600 730	12.5×35 16×25 18×20	560
33	16×20	900	16×20 16×25 18×20	730 980 780	16×31.5 18×25	700
47	16×25 18×20	1180	18×25	1200	18×31.5	880
68	18×25	1470				