



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**MPK SERIES**

◆ **FEATURES**

- Ultra small and light. For PFC use
- Low height.
- Low buzz.




◆ **SPECIFICATIONS**


Category Temperature Range	-40°C ~ +105°C /Derate the voltage as shown CAUTION FOR PROPER USE OF FILM CAPACITORS when using the capacitor beyond 85°C)
Rated Voltage (U <sub>R</sub> )	450VDC, 630VDC
Capacitance Tolerance	±5%(J), ±10%(K)
tanδ	0.001max at 1kHz
Voltage Proof	U <sub>R</sub> × 150% 60s
Insulation Resistance	7500ΩFmin
Reference Standard	JIS C 5101-16, JIS C 5101-1

◆ **OUTLINE**



(mm)

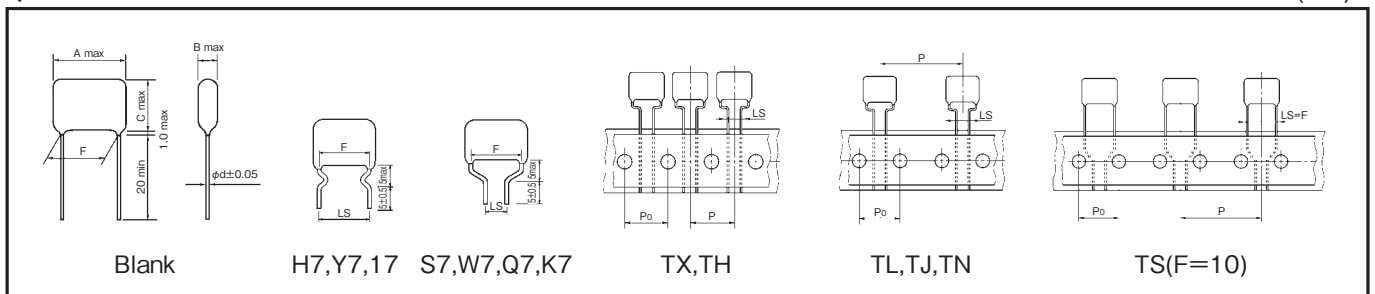

◆ **PART NUMBER**



◆ **PERMISSIBLE CURRENT FOR FREQUENCY**

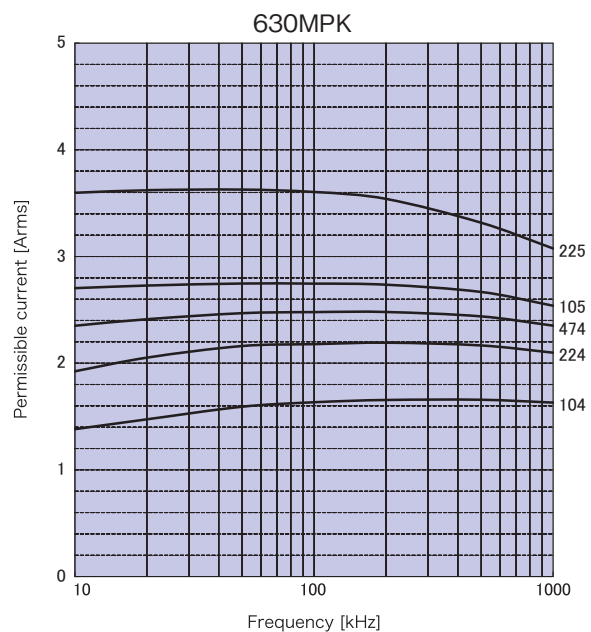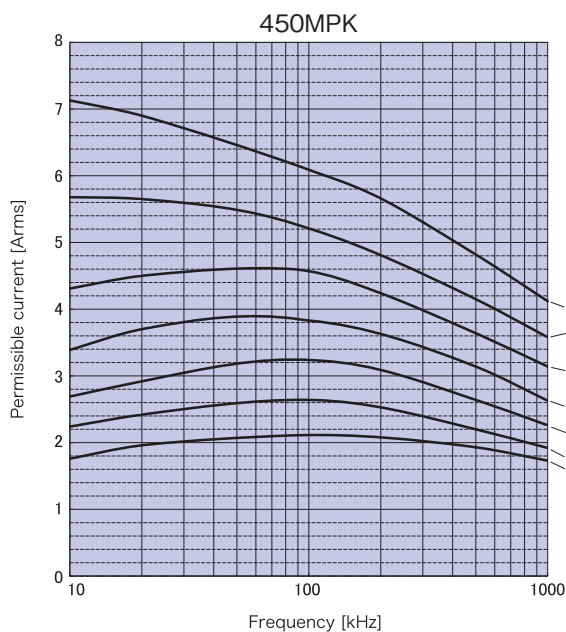

**◆ STANDARD SIZE**

□ : Tolerance    \*\* : Suffix

Rated Voltage	Cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)								Part No.
								Long Lead type		Taping Ammo Pack Type - Style						
		A	B	C	F±1.0	LS±0.5	d	Bag	Carton	TC	TX, TH	TL, TJ	TN	TS		
450 VDC	0.47	18.0	6.5	11.0	15.0	5.0/7.5/10.0/15.0	0.6	100	2,000	—	—	500	400	—	450MPK474□**	
	0.56	18.0	7.0	11.5	15.0	5.0/7.5/10.0/15.0	0.6	100	2,000	—	—	500	400	—	450MPK564□**	
	0.68	18.0	8.0	12.5	15.0	5.0/7.5/10.0/15.0	0.6	100	2,000	—	—	400	400	—	450MPK684□**	
	0.82	18.0	8.5	13.0	15.0	5.0/7.5/10.0/15.0	0.8	100	2,000	—	—	400	300	—	450MPK824□**	
	1	18.0	9.5	14.0	15.0	5.0/7.5/10.0/15.0	0.8	100	1,000	—	—	400	300	—	450MPK105□**	
	1.2	18.0	10.0	15.0	15.0	5.0/7.5/10.0/15.0	0.8	100	1,000	—	—	—	—	—	450MPK125□**	
	1.5	18.0	11.0	16.0	15.0	5.0/7.5/10.0/15.0	0.8	200	1,000	—	—	—	—	—	450MPK155□**	
	1.8	18.0	13.0	17.0	15.0	5.0/7.5/10.0/15.0	0.8	200	1,000	—	—	—	—	—	450MPK185□**	
	2.2	18.0	13.5	19.0	15.0	5.0/7.5/10.0/15.0	0.8	200	1,000	—	—	—	—	—	450MPK225□**	
	2.7	18.0	14.5	21.0	15.0	5.0/7.5/10.0/15.0	0.8	200	800	—	—	—	—	—	450MPK275□**	
	3.3	18.0	16.0	22.5	15.0	5.0/7.5/10.0/15.0	1.0	100	500	—	—	—	—	—	450MPK335□**	
3.9	18.0	17.0	23.5	15.0	5.0/7.5/10.0/15.0	1.0	100	500	—	—	—	—	—	450MPK395□**		
4.7	18.0	19.0	25.5	15.0	5.0/7.5/10.0/15.0	1.0	100	500	—	—	—	—	—	450MPK475□**		
630 VDC	0.1	13.0	8.0	13.0	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	400	—	400	630MPK104□**	
	0.12	13.0	8.5	13.5	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	400	—	400	630MPK124□**	
	0.15	13.0	9.0	14.5	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	400	—	400	630MPK154□**	
	0.18	13.0	9.5	15.0	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	300	—	300	630MPK184□**	
	0.22	13.0	10.5	15.5	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	300	—	300	630MPK224□**	
	0.27	18.0	7.5	13.0	15.0	5.0/7.5/10.0/15.0	0.8	100	2,000	—	—	400	400	—	630MPK274□**	
	0.33	18.0	8.0	13.5	15.0	5.0/7.5/10.0/15.0	0.8	100	1,000	—	—	400	300	—	630MPK334□**	
	0.39	18.0	8.5	14.5	15.0	5.0/7.5/10.0/15.0	0.8	100	1,000	—	—	400	300	—	630MPK394□**	
	0.47	18.0	9.5	15.5	15.0	5.0/7.5/10.0/15.0	0.8	100	1,000	—	—	300	300	—	630MPK474□**	
	0.56	18.0	9.5	17.0	15.0	5.0/7.5/10.0/15.0	0.8	200	1,000	—	—	300	300	—	630MPK564□**	
	0.68	18.0	10.5	18.5	15.0	5.0/7.5/10.0/15.0	0.8	200	1,000	—	—	300	—	—	630MPK684□**	
	0.82	25.0	9.0	16.5	22.5	15.0/22.5	0.8	200	1,000	—	—	—	—	—	630MPK824□**	
	1	25.0	10.0	17.0	22.5	15.0/22.5	0.8	200	1,000	—	—	—	—	—	630MPK105□**	
	1.2	25.5	10.5	19.0	22.5	15.0/22.5	0.8	200	800	—	—	—	—	—	630MPK125□**	
1.5	25.5	11.0	20.0	22.5	15.0/22.5	0.8	100	500	—	—	—	—	—	630MPK155□**		
1.8	25.5	12.0	21.0	22.5	15.0/22.5	0.8	100	500	—	—	—	—	—	630MPK185□**		
2.2	25.5	13.0	23.0	22.5	15.0/22.5	0.8	100	500	—	—	—	—	—	630MPK225□**		