



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



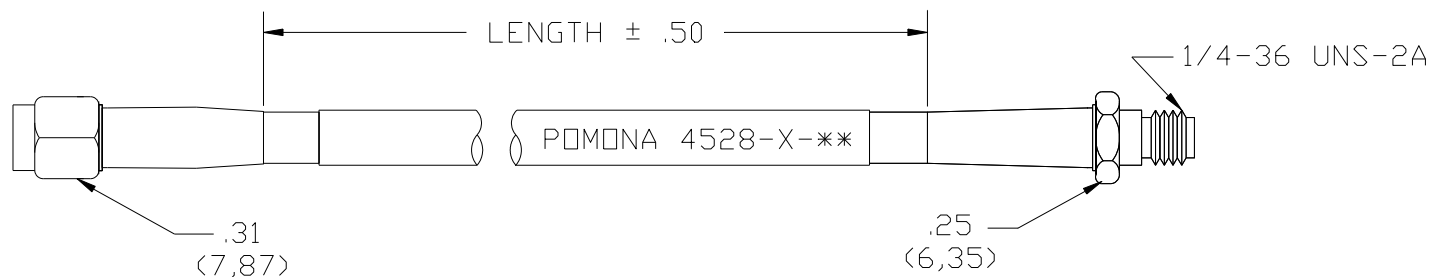

	CABLE TYPES	
	RG 174/U Black	RG 142B/U Tinted Brown
	4528-K-XX	4528-X-XX
Cap. pF/ft.	30.8	29.0
Nom. Imp. Ohms	50	50
Loss	.45 dB/ft @ 1.0 GHz Max	.67 dB/ft @ 12.4GHz Max
Temperature	+85°C. (+185°F.) Max.	+200°C. (+392°F.) Max

MATERIALS:

Connectors: SMA (Male) & SMA (Female) Crimp

Body – Passivated Stainless Steel, Contact: Gold Plated Brass, Center Contact: Beryllium Copper

Dielectric – Teflon

Finish: Contact – Gold plated

Body – Nickel plated

Cable: See Tab Block

Marking: “Pomona 4528-X-XX”

RATINGS:

Operating Voltage: 335 VRMS Max.

ORDERING INFORMATION: Model 4528-X-XX

X=Cable type (see table above)

XX = Cable Lengths

4528-K, Standard Length 48” (1219)

4528-X, Standard Lengths 24” (610), & 48” (1219)

Additional lengths can be quoted upon request.

Ordering Example: 4528-X-24 Indicates 24” in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ±.005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA