



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 4532 Minigator Clips To BNC Male

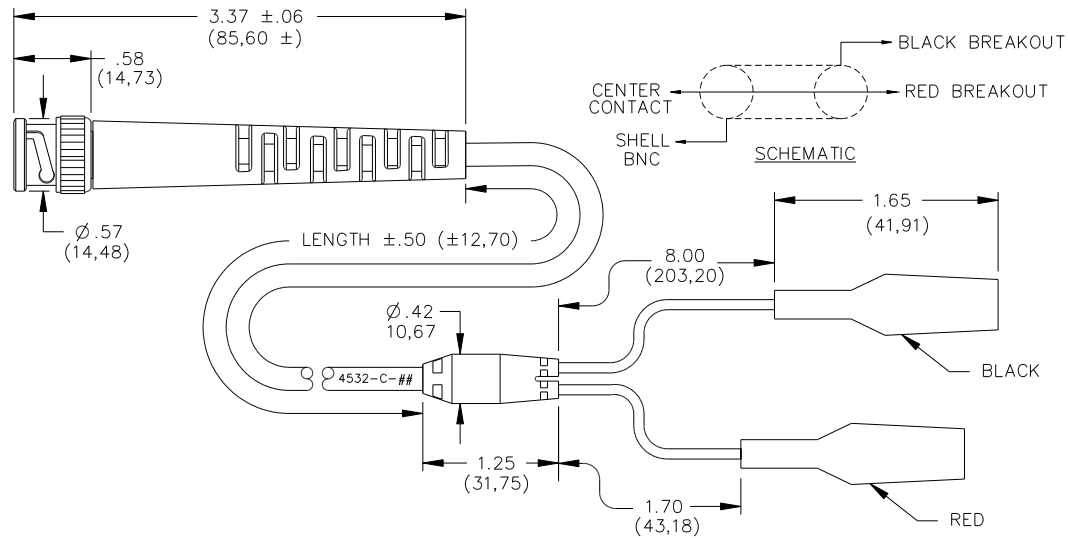

FEATURES:

- Lengths other than those specified are available upon request.

MATERIALS:

Conn: 1st End-BNC Male

Finish: Body and Fittings, Tarnish Resistant.

Nominal Impedance: 50 Ohms.

Center Contact: Gold plated per MIL-C-39012.

Molded Boot: PVC molded to cable and BNC.

Color: Black

Cable: RG58C/U. (.195) O.D.

Marking: "POMONA 4532-C-XX".

Molded Breakout: PVC molded to breakout leads and cable. Color: Black

Breakout leads: 20 AWG; 41 x 36 tinned copper.

PVC insulated 2.21 (.087) O.D.; Color matches

color of insulator. One Red and one Black.

Conn: 2nd End-Insulated Minigator Clips.

Materials: Steel.

Finish: Cadmium plated

Insulators: Vinyl

Colors: Black and Red.

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 45 VRMS/DC

Current: 5 Amperes

ORDERING INFORMATION: 4532-C-XX
XX=Cable Length, Standard Lengths: 24" (610), 30" (762), 36" (914), 48" (1219), 60" (1524).
Ordering Example: 4532-C-60 indicates 60" (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

SY/EH/LS

W:\pomona\grponly\Datasheet Updates\Updates 2005\d4532_1_02.doc

More drawings available at www.pomonaelectronics.com

Page 1 of 1