



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INSTRUCTIONS



45578 CATV Cable Stripper

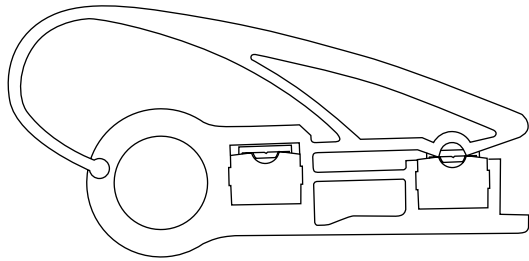

Description

The 45578 CATV Cable Stripper is intended to strip RG6, RG7, RG11, and RG59. The center conductor stripping blade has a “V”-shaped notch to eliminate scoring. A storage compartment is provided for a spare blade cartridge. Blade cartridges can be installed from either side of the tool for right-handed or left-handed operation.

	⚠ WARNING
	Electric shock hazard: Do not use on live circuits. Contact with live circuits could result in severe injury or death.

KEEP THESE INSTRUCTIONS

⚠ CAUTION

Blades are sharp. Keep fingers away from blades when stripping cable and when replacing the blade cartridge. Failure to observe these precautions may result in injury.

Operation


1. Slide the tension arm into the notch of the loop.
2. Squeeze the tension arm to open the tool. Insert the cable until it contacts the stop.
3. Rotate the tool around the cable until the cutting action is complete.
4. Squeeze the stripper closed while pulling the cable out of the tool. Open the tool and remove the insulation.

Remove the tension arm from the notch for storage.

Replacement Cartridges

504 5581.8 for RG7 and RG11

504 5580.0 for RG6 and RG59

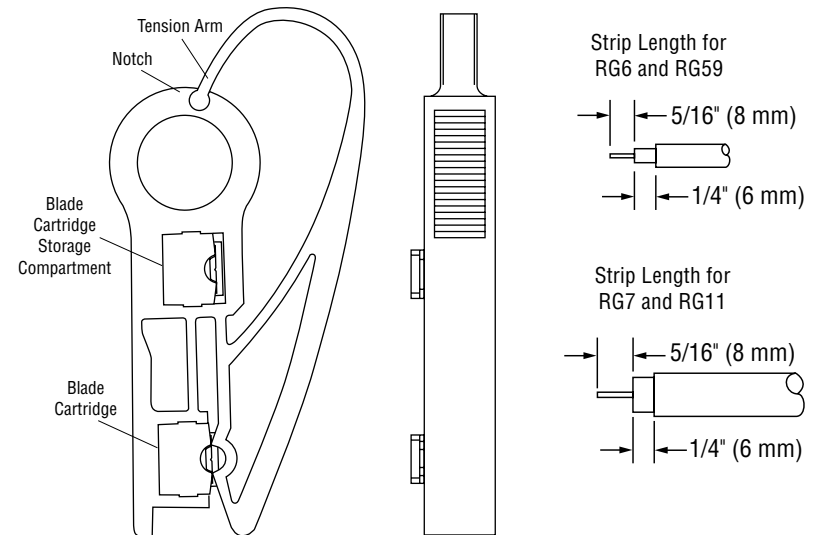

GREENLEE®

A Textron Company

4455 Boeing Drive, Rockford, IL 61109-2988 USA
Customer Service (International): 815-397-7070 • Fax: 815-397-9247
Customer Service (North America): 800-435-0786
USA Fax: 800-451-2632, 815-397-1865 • Canada Fax: 800-524-2853

Greenlee Textron is a subsidiary of Textron Inc.