



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



460-XXX-SP SERIES

Single-phase voltage monitor



Description


The 460-100-SP is used on 95-120VAC, 50*/60Hz single-phase motors and the 460-200-SP is used on 190-240VAC, 50*/60Hz single-phase motors to protect them from damaging high and low voltage conditions. An adjustment knob allows the user to set a 1-500 second restart delay. The variable restart delay is also a power-up delay and can be utilized to stagger-start motors on the same system.

A unique microcontroller-based, voltage-sensing circuit constantly monitors the voltage to detect harmful power line conditions. When a harmful condition is detected, the MotorSaver's output relay is deactivated after a specified trip delay. The output relay reactivates after power line conditions return to an acceptable level and a specified amount of time has elapsed (restart delay). The trip delay prevents nuisance tripping due to rapidly fluctuating power line conditions.

Features & Benefits

| FEATURES | BENEFITS |
|--|--|
| Proprietary microcontroller based circuitry | Constant monitoring of voltage to detect harmful power line conditions, even before a motor starts |
| Fixed trip delay 4s | Prevents nuisance tripping due to rapidly fluctuating power line conditions |
| Adjustable restart delay (1-500s) | Allows staggered start up of multiple motors on the same system to prevent a low voltage condition |
| Advanced LED indication | Provides diagnostics which can be used for troubleshooting and to determine relay status |
| DIN rail or surface mountable | Allows flexibility for panel assembly |

Wiring Diagram

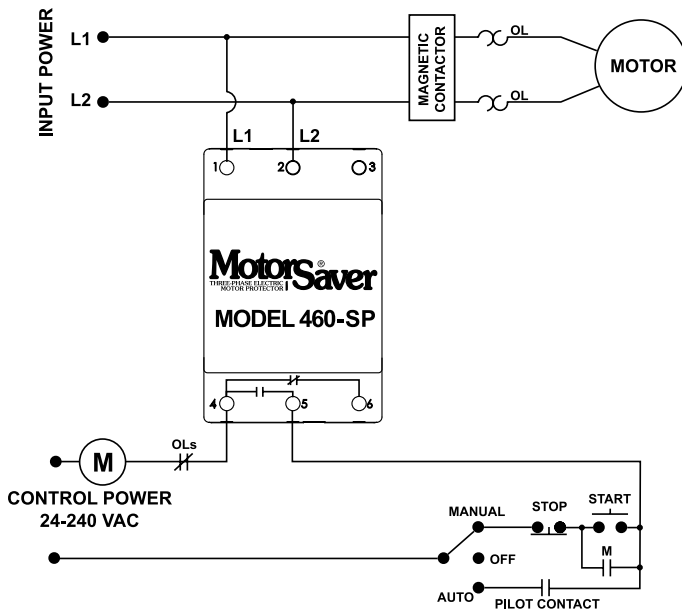

Ordering Information

| MODEL | LINE VOTAGE |
|------------|-------------|
| 460-100-SP | 95-120VAC |
| 460-200-SP | 190-240VAC |

460-XXX-SP SERIES

Specifications

Input Characteristics

Line Voltage

| | |
|------------|------------|
| 460-100-SP | 95-120VAC |
| 460-200-SP | 190-240VAC |

| | |
|-----------|----------|
| Frequency | 50*/60Hz |
|-----------|----------|

Functional Characteristics

Low Voltage (% of setpoint):

| | |
|-------|---------|
| Trip | 90% ±1% |
| Reset | 93% ±1% |

High Voltage (% of setpoint)

| | |
|-------|----------|
| Trip | 110% ±1% |
| Reset | 107% ±1% |

Trip Delay Time

| | |
|---------------------|-----------------|
| Low or High Voltage | 4 seconds fixed |
|---------------------|-----------------|

Restart Delay Time

| | |
|---------------|--------------------------|
| After a Fault | 1-500 seconds adjustable |
|---------------|--------------------------|

| | |
|-----------------------------|--------------------------|
| After a Complete Power Loss | 1-500 seconds adjustable |
|-----------------------------|--------------------------|

Output Characteristics

Output Contact Rating (1 Form C)

| | |
|------------|----------------------|
| Pilot Duty | 480VA @ 240VAC, B300 |
|------------|----------------------|

| | |
|-----------------|--------------|
| General Purpose | 10A @ 240VAC |
|-----------------|--------------|

General Characteristics

Ambient Temperature Range

| | |
|-----------|------------------------------|
| Operating | -40° to 70°C (-40° to 158°F) |
|-----------|------------------------------|

| | |
|---------|------------------------------|
| Storage | -40° to 80°C (-40° to 176°F) |
|---------|------------------------------|

| | |
|---------------------|-----|
| Maximum Input Power | 6 W |
|---------------------|-----|

| | |
|---------------------|----------------------------|
| Class of Protection | IP20, NEMA 1 (finger safe) |
|---------------------|----------------------------|

| | |
|-------------------|---------------------------------------|
| Relative Humidity | 10-95%, non-condensing per IEC 68-2-3 |
|-------------------|---------------------------------------|

| | |
|-----------------|--------------|
| Terminal Torque | 4.5 in.-lbs. |
|-----------------|--------------|

| | |
|-----------|---|
| Wire Type | Stranded or solid 12-20 AWG, one per terminal |
|-----------|---|

Standards Passed

| | |
|---|---|
| Electrostatic Discharge (ESD) | IEC 61000-4-2, Level 3, 6kV contact, 8kV air |
| Radio Frequency Immunity, Radiated | 150 MHz, 10V/m |
| Fast Transient Burst | IEC 61000-4-4, Level 3, 3.5 kV input power and controls |

Surge

| | |
|--------------------------|---|
| IEC | IEC 61000-4-5, Level 3, 4kV line-to-line; Level 4, 4kV line-to-ground |
| ANSI/IEEE | C62.41 Surge and Ring Wave Compliance to a level of 6kV line-to-line |
| Hi-potential Test | Meets UL508 (2 x rated V +1000V for 1 min) |

Safety Marks

| | |
|-----------|----------------------|
| UL | UL508 (File #E68520) |
|-----------|----------------------|

| | |
|-----------|---------------|
| CE | IEC 60947-6-2 |
|-----------|---------------|

Enclosure

| | |
|-------------------|---------------|
| Dimensions | Polycarbonate |
|-------------------|---------------|

| | |
|--|--|
| | H 88.9 mm (3.5"); W 52.93 mm (2.084"); |
|--|--|

| | |
|--|---------------------------|
| | D 59.69 mm (2.35") |
|--|---------------------------|

| | |
|---------------|------------------------------|
| Weight | 0.9 lb. (14.4 oz., 408.23 g) |
|---------------|------------------------------|

| | |
|------------------------|--------------------------------|
| Mounting Method | 35mm DIN rail or Surface Mount |
|------------------------|--------------------------------|

| | |
|--|-------------------|
| | (#6 or #8 screws) |
|--|-------------------|

*Note: 50 Hz will increase all delay timers by 20%