



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com




Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.

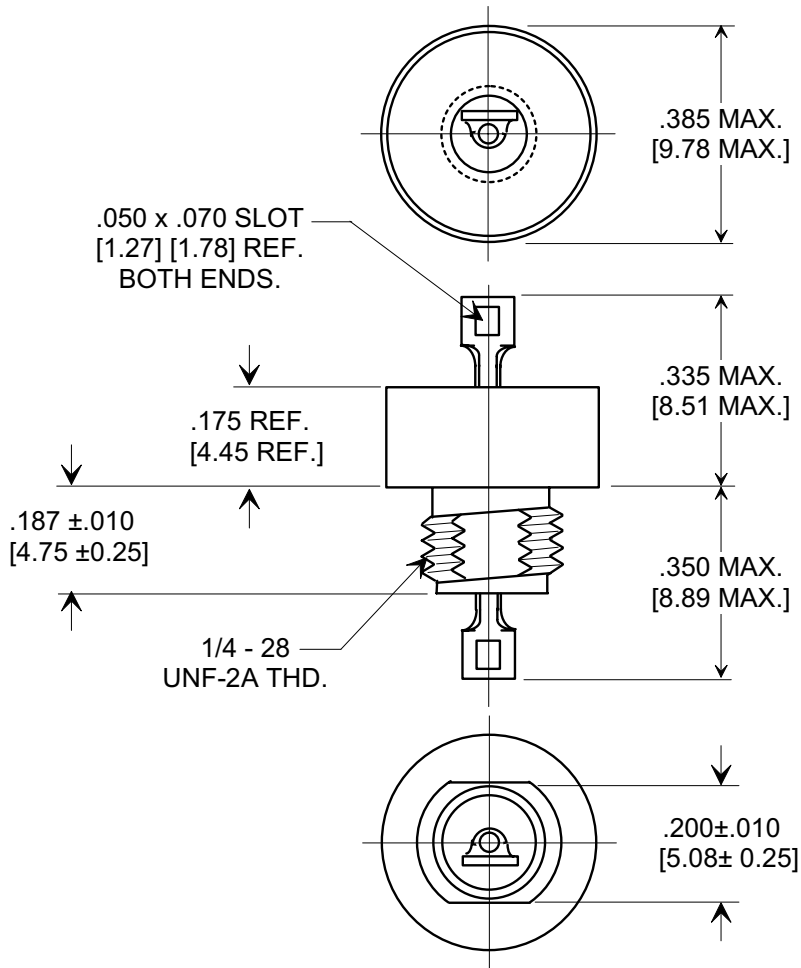

**MOUNTING HARDWARE**

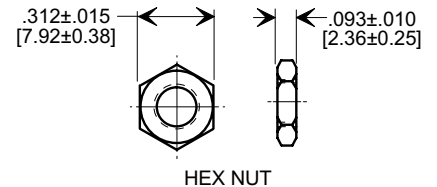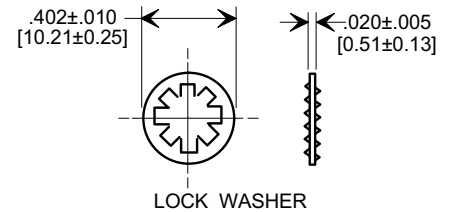

**NOTES:**

- MATERIALS:**  
 BUSHING - TIN PLATED STEEL  
 LEAD - SOLDER PLATED COPPER  
 NUT - TIN PLATED BRASS  
 L'WASHER - TIN PLATED PHOSPHOR BRONZE
- MOUNTING TORQUE:** 8 lb - ins. max  
 SEAL TESTED PER MIL-STD-202  
 METHOD 112 CONDITION A.
- DCR** - .01Ω max.
- MAX. SOLDER TEMPERATURE** 500°F

MIN. CAP. (μF)	WORKING VOLTAGE DC		CURRENT	IR (MIN.) @ 100 VDC	DWW	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
	+85°C	+125°C				30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz
1.4	100	70	15 A	500 M Ω	300 VDC	15	25	34	44	60	70

X-2015 Rev-0 <b>REVISION RECORD</b>	Original Release C.O. <b>6769</b>	METRIC DIM'S & NOTES ADDED. E.C. 7-17-92  WVDC REVISED 100 & 70 WERE 80 & 50. L.E. 10-26-92  RDN TO COMP FMP. STYLE DWG SPLIT FOR EACH VAR. S.M. 06-19-02  NOTE 1 LEAD WAS SILVER. S.M. 02-02-04	--TOLERANCES-- Unless Otherwise Specified		Title " <b>C</b> " TYPE COAXIAL <b>BROADBAND FILTER -                  HERMETICALLY SEALED</b>			
	<b>0</b>		DECIMAL ± // //				Drawn <b>S.M. 06-19-02</b>	Scale <b>X 3</b>
	<b>1</b>		ANGLES ± // //		Approved <b>J.Mc 06-19-02</b>	<b>A</b> <b>4601-000</b>		
	<b>2</b>		<b>TUSONIX</b> TUCSON, ARIZONA					
	<b>3</b>							